



PRO Edition

PRODUCT CATALOG

2026



Q1/Q2 Effective Date
01.01.2026


True Full-Color in near-total darkness without any white light, AI-powered image enhancement and object recognition.



D A R K

TITANIUM

DARK X Camera

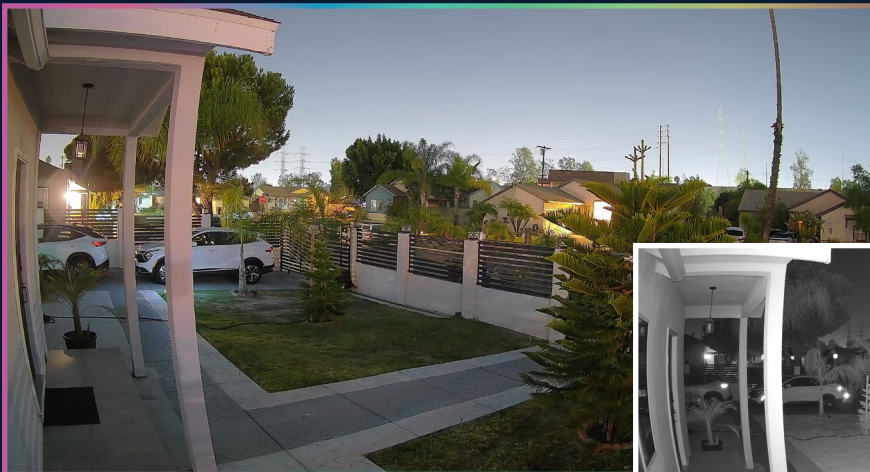

Regular IR Camera

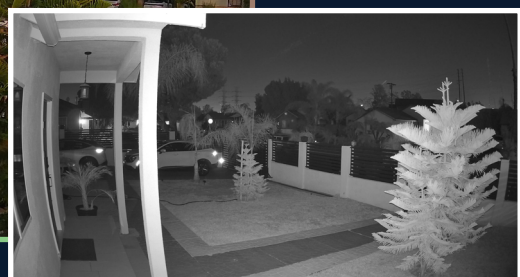


Table of Contents

TITANIUM

Network Video Recorders	01
Network Cameras	03
Digital Video Recorders	14
HD-CVI Cameras	15
HDA Cameras	17
Doorbell	18
Hidden Camera	18

UNV

UNV Network Video Recorders	19
UNV Network Cameras	21

ADVANCED DIAMOND

Network Camera	30
HD-CVI Camera	31

Diamond Series

Diamond Network Video Recorders	33
Diamond Network Cameras	35
Diamond Video Intercom	41
Diamond Thermal Solutions	41
Diamond Digital Video Recorders	42
Diamond HD-CVI Cameras	43
Diamond Smart Interactive Whiteboard	45

ENSH

Network Video Recorders	46
Network Cameras	47
Digital Video Recorders	52
HD-CVI Cameras	53

EPA Series

EPA Series	56
------------	----

Lysora

Lysora Plan	57
-------------	----

Akuvox

Intercom & Access Control	59
---------------------------	----

Reyee

Access Point	65
Smart Mesh Router and Extender	66
Wireless Bridge	67
Networking Switch	67
Business Router and Others	71

AJAX

Hub and Wireless Siren	72
Water and Fire Detection	73
Wireless Touch Keypad	73
Wireless Motion Detector	74
Range Extender	75
Others	76

SUN GUARDIAN

Solar Panel Tralier	78
Enclosure Box	80
Site Tower and Pole	81

Accessory

Accessory	82
-----------	----

	VALUE NVR NDAA	VALUE NVR NDAA	VALUE NVR NDAA	PRO NVR NDAA
Models	ED9304H5NV-4P-3NB	ED9308H5NV-8P-3NB	ED9516H5NV-16P-3NB	ED9308H5NV-8P-ANB
	 4 CH NVR  	 8 CH NVR  	 16 CH NVR  	 8 CH NVR  
Video Compression	H.256S/H.265+/H.265/H.264	H.256S / H.265+ / H.265 / H.264	H.256S / H.265+ / H.265 / H.264	H.256S / H.265+ / H.265 / H.264
Max. Recording Resolution	8MP	8MP	8MP	12MP
Recording Rate	8MP @ 30 fps	8MP @ 30 fps	8MP @ 30 fps	1 CH 12MP @ 20 fps
IP Video Input	4 CH	8 CH	16 CH	8 CH
Bandwidth In/Out	40 Mbps / 40 Mbps	80 Mbps / 80 Mbps	144 Mbps / 144 Mbps	80 Mbps / 80 Mbps
Display	HDMI / VGA	HDMI / VGA	HDMI / VGA	HDMI, VGA (Independent)
Playback	4	8	16	8
Audio In/Out	1/1 RCA	1/1 RCA	16/1 RCA	1/1 RCA
Alarm In/Out	-	-	-	8/4
Ethernet	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps
PoE Ports	4	8	16	8
USB	2× USB 2.0	2× USB 2.0	2× USB 2.0	2× USB 2.0, 1× USB 3.0
Storage	1× 10 TB	1× 10 TB	2× 10 TB	1× 10 TB
Power	48 V DC	48 V DC	48 V DC	48 V DC
Video Analytics	 	 	 	 
	I		I	I

	PRO NVR NDAA	PRO NVR NDAA	PRO NVR NDAA	PRO NVR NDAA
Models	ED9616H5NV-16P-AN	ED9516H5NV-16P-ANB	ED9532H5NV-AN	ED9632H5NV-16P-AN
	 16 CH NVR  	 16 CH NVR  	 32 CH NVR  	 32 CH NVR  
Video Compression	H.265 / H.264	H.256S / H.265+ / H.265 / H/264	H.265 / H.264	H.265 / H.264
Max. Recording Resolution	12MP	12MP	12MP	12MP
Recording Rate	12MP @ 30 fps	12MP @ 20 fps	12MP @ 20 fps	12MP @ 20 fps
IP Video Input	16 CH	16 CH	32 CH	32 CH
Bandwidth In/Out	160 Mbps / 160 Mbps	160 Mbps / 160 Mbps	192 Mbps / 192 Mbps	192 Mbps / 192 Mbps
Display	HDMI1 / VGA, HDMI2	HDMI, VGA (Independent)	HDMI1 / VGA, HDMI2	HDMI1 / VGA, HDMI2
Playback	16 CH	16	16 CH	16 CH
Audio In/Out	1/1 RCA	16/1 RCA	1/1 RCA	1/1 RCA
Alarm In/Out	16/4	8/4	8/4	16/4
Ethernet	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps	2× RJ-45 10/100/1000 Mbps	2× RJ-45 10/100/1000 Mbps
PoE Ports	16	16	-	16
USB	2× USB 2.0, 1× USB 3.0	2× USB 2.0	2× USB 2.0, 1× USB 3.0	2× USB 2.0, 1× USB 3.0
Storage	4× 10 TB, eSATA	2× 10 TB	2× 10 TB	4× 10 TB + 1 eSATA
Power	110 V AC	48 V DC	12 V DC	110 V AC
Video Analytics	 	 	 	 

PRO NVR NDAA	
Models	ED9732H5NV-16P-AN
 32 CH NVR AI 4K	
Video Compression	H.265
Max. Recording Resolution	12MP
Recording Rate	12MP @ 20 fps
IP Video Input	32 CH
Bandwidth In/Out	192 Mbps / 192 Mbps
Display	HDMI / VGA, HDMI2
Playback	16 CH
Audio In/Out	1/1 RCA
Alarm In/Out	16/4
Ethernet	1× RJ-45 10/100/1000 Mbps
PoE Ports	16
USB	1× USB 2.0, 1× USB 3.0
Storage	8× 10 TB, 1× eSATA
Power	110 V AC
Video Analytics	VCA Face Recognition



	PRO NVR NDAA	PROJECT NVR NDAA	PROJECT NVR NDAA	PROJECT NVR NDAA	
Models	ED9732H5NV-AN	ED9764H5NV-A3H	ED98128H5NV-A3H	ED98256H5NV-A3H	
	 32 CH NVR AI 4K	 64 CH NVR AI 4K	 128 CH NVR AI 4K	 256 CH NVR AI 4K	
	Video Compression	H.265	H.256S/H.265+/H.265/H.264	H.256S / H.265+ / H.265 / H..264	H.256S / H.265+ / H.265 / H.264
	Max. Recording Resolution	12MP	16MP	16MP	16MP
	Recording Rate	12MP @ 20 fps	1 CH 16MP @ 30 fps	1 CH 16MP @ 30 fps	1 CH 16MP @ 30 fps
	IP Video Input	32 CH	64 CH	128 CH	256 CH
Bandwidth In/Out	160 Mbps / 160 Mbps	640 Mbps / 640 Mbps	768 Mbps / 768 Mbps	768 Mbps / 768 Mbps	
Display	HDMI1 / VGA, HDMI2	HDMI1/HDMI2/HDMI3/HDMI4/VGA	HDMI1/HDMI2/HDMI3/HDMI4/VGA	HDMI1/HDMI2/HDMI3/HDMI4/VGA	
Playback	16	16	16	16	
Audio In/Out	1/1 RCA	1/1 RCA	1/1 RCA	1/1 RCA	
Alarm In/Out	8/4	16/4	16/4	24/8	
Ethernet	2× RJ-45 10/100/1000 Mbps	2× RJ-45 10/100/1000 Mbps	2× RJ-45 10/100/1000 Mbps	2× RJ-45 10/100/1000 Mbps	
PoE Ports	-	-	-	-	
USB	2× USB 2.0, 1× USB 3.0	2× USB 2.0, 1× USB 3.0	2× USB 2.0, 1× USB 3.0	2× USB 2.0, 1× USB 3.0	
Storage	8× 12 TB, 2× eSATA	8× 10 TB	8× 10 TB	16× 10 TB	
Power	110 V AC	110 V AC	110 V AC	110 V AC	
Video Analytics	VCA Face Recognition	VCA Face Recognition	VCA Face Recognition	VCA Face Recognition	
			I	I	


TITANIUM

AI-ISP



Multi-Algorithm Fusion and Concurrency

True Full-Color in near-total darkness without any white light, AI-powered image enhancement and object recognition.

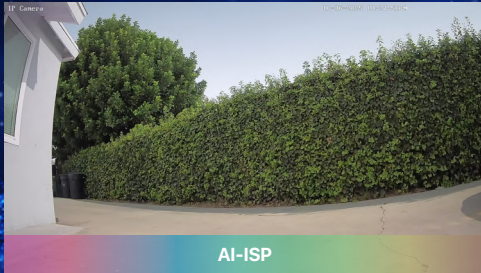

6th Generation

	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA
Models	IP-5IR4S4C1-28	IP-5IR4C41-28 NEW	IP-5IR4S42-28-PA NEW	IP-5IR4E4B3-MZ-PA NEW
	 Full-Color AI	 Full-Color	 Full-Color	 Full-Color
Image Sensor	1/3" 4MP CMOS	1/2.9" 4MP CMOS	1/3" 4MP CMOS	1/2.9" 4MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens	2.7 - 13.5 mm motorized lens
Wide Dynamic Range	120 dB true WDR	-	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft, White LED	66 ft, White LED	98 ft, White LED	98 ft, White LED
Max. Resolution & Frame Rate	4MP (2560×1440) @ 30 fps	4MP (2688×1520) @ 30 fps	4MP (2560×1440) @ 30 fps	4MP (2688×1520) @ 30 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic Built-in Speaker	1/1 Built-in Mic Built-in Speaker
Alarm I/O	-	-	-	1/1
Protection	IP67	IP67	IP67	IP67
Memory Slot	256 GB micro SD slot	512 GB micro SD slot	256 GB micro SD slot	512 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B8-W (15)  BRACKET11-W (22)  UJB94-W (13)	 B8-W (15)  BRACKET11-W (22)  UJB94-W (13)	 B8-W (15)  AR-118W (-)  CEM-118W (-)  WP-118W (-)	

	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA
Models	IP-5IRD4C44-28 NEW	IP-5IRD4C4H5-28 NEW	IP-5IRD4S45-28-PA NEW	IP-5IRD4S4C4-28
	 DARK AI-ISP	 DARK AI-ISP	 Full-Color	 Full-Color AI
Image Sensor	1/2.9" 4MP CMOS	1/1.79" 4MP CMOS	1/1.79" 4MP CMOS	1/3" 4MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	-	-	-	120 dB true WDR
Max. IR Distance	66 ft, White LED	98 ft, White LED	98 ft, White LED	98 ft, White LED
Max. Resolution & Frame Rate	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps	4MP (2560×1440) @ 30 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic
Alarm I/O	-	1/1	1/1	-
Protection	IP67	IP67	IP67	IP67
Memory Slot	512 GB micro SD slot	1 TB micro SD slot	1 TB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B8-W (15)  AR-118W (-)  CEM-118W (-)  WP-118W (-)	 B9-W (17)  AR-139W (-)  CEM-139W (-)  WP-139W (21)		 B8-W (15)  BRACKET11-W (22)  UJB94-W (13)
	I		I	



	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA
Models	IP-5IRD4E4B5-MZ-PA NEW	IP-5VP5S41-28	IP-5VP5S43-MZ	IP-5IR6S4C1-28
	 Full-Color			 Full-Color AI
Image Sensor	1/2.9" 4MP CMOS	1/2.7 5MP CMOS	1/2.7 5MP CMOS	1/2.5" 6MP CMOS
Lens	2.7 - 13.5 mm motorized lens	2.8 mm fixed lens	2.8 - 12 mm motorized lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB true WDR	120 dB True WDR
Max. IR Distance	98 ft, White LED	98 ft	164 ft	98 ft, White LED
Max. Resolution & Frame Rate	4MP (2688×1520) @ 30 fps	5MP (2880×1620) @ 20 fps	5MP (2880×1620) @ 20 fps	6MP (3200×1800) @ 30 fps
Audio I/O	1/1 Built-in Mic Built-in Speaker	1/- Built-in Mic	- Built-in Mic	1/1 Built-in Mic
Alarm I/O	1/1	-	-	-
Protection	IP67	IP67, IK10	IP67, IK10	IP67
Memory Slot	512 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories		 B6-W-2 (17)  BRACKET11-W (22)  UJB129-W (15)  UWB129-W (20)	 B10-W (18)  BRACKET12-W (22)  UJB155-W (15)  UWB155-W (20) * BRACKET12-W must be used together with B10-W	 B8-W (15)

	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA
Models	IP-5IR6S4C2-MZ	IP-5VP6S4C1-28 NEW	IP-5IRD6S4C4-28	IP-5IRD6S4C4-G28
	 Full-Color	 Full-Color	 Full-Color AI	 Full-Color AI
Image Sensor	1/2.5" 6MP CMOS	1/2.5" 6MP CMOS	1/2.5" 6MP CMOS	1/2.5" 6MP CMOS
Lens	2.8 - 12 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB True WDR	120 dB true WDR	120 dB True WDR	120 dB True WDR
Max. IR Distance	164 ft, White LED	98 ft, White LED	98 ft, White LED	98 ft, White LED
Max. Resolution & Frame Rate	6MP (3200×1800) @ 20 fps	6MP (3200×1800) @ 20 fps	6MP (3200×1800) @ 30 fps	6MP (3200×1800) @ 30 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic Built-in Speaker	1/1 Built-in Mic	1/1 Built-in Mic
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B8-W (15)		  B8-W (15) BRACKET11-W (22)	  B8-G (12) BRACKET11-G (19)

	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA
Models	IP-5IRD6S4C5-MZ	IP-5IRD6S4C5-GMZ	IP-5IR8S4C1-28	IP-5IR8S42-28-PA NEW
	 Full-Color	 Full-Color	 Full-Color 4K	 Full-Color 4K
Image Sensor	1/2.5" 6MP CMOS	1/2.5" 6MP CMOS	1/2.8 8MP CMOS	1/2.8" 8MP CMOS
Lens	2.8 - 12 mm motorized lens	2.8 - 12 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB True WDR	120 dB True WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	164 ft, White LED	164 ft, White LED	98 ft, White LED	98 ft, White LED
Max. Resolution & Frame Rate	6MP (3200×1800) @ 20 fps	6MP (3200×1800) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic Built-in Speaker
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP66
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	  B9-W (17) BRACKET11-W (22)	  B9-G (13) BRACKET11-G (19)	 B8-W (15)	

	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA
Models	IP-5IR8C4A2-28 NEW	IP-5IR8S4C2-MZ	IP-5VP8S3B1-28	IP-5VP8S4C1-28 NEW
	 Full-Color 4K	 Full-Color 4K	 4K	 Full-Color 4K
Image Sensor	1/1.8" 8MP CMOS	1/2.8" 8MP CMOS	1/2.8" 8MP CMOS	1/2.8" 8MP CMOS
Lens	2.8 mm fixed lens	2.8 - 12 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft, White LED	164 ft, White LED	98 ft	98 ft, White LED
Max. Resolution & Frame Rate	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic	1/- Built-in Mic	1/1 Built-in Mic Built-in Speaker
Alarm I/O	-	-	-	-
Protection	IP67, IK10	IP67	IP67, IK10	IP67, IK10
Memory Slot	1 TB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B8-W (15) AR-118W (-) CEM-118W (-) WP-118W (-)	 B8-W (15) UJB94-W (13)	 B6-W-2 (17) BRACKET11-W (22) UJB129-W (15) UWB129-W (20)	
	I	I		I

	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA
Models	IP-5VP8S3B3-MZ	IP-5VP8S4C3-MZ NEW	IP-5IRD8S4C4-28	IP-5IRD8S4C4-G28
	 4K	 Full-Color 4K	 Full-Color 4K	 Full-Color 4K
Image Sensor	1/2.8" 8MP CMOS	1/2.8" 8MP CMOS	1/2.8" 8MP CMOS	1/2.8" 8MP CMOS
Lens	2.8 - 12 mm motorized lens	2.8 - 12 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB True WDR	120 dB True WDR
Max. IR Distance	164 ft	131 ft, White LED	98 ft, White LED	98 ft, White LED
Max. Resolution & Frame Rate	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic
Alarm I/O	-	-	-	-
Protection	IP67, IK10	IP67, IK10	IP67	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B10-W (18) BRACKET12-W (22) UJB155-W (15) UWB155-W (20) * BRACKET12-W must be used together with B10-W		 B8-W (15) BRACKET11-W (22)	 B8-G (12) BRACKET11-G (19)
		I		I


	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA
Models	IP-5IRD8C4H5-28 NEW	IP-5IRD8S45-28-PA NEW	IP-5IRD8S4C5-MZ	IP-5IRD8S4C5-GMZ
	 DAK AI-ISP 4K	 DAK Full-Color 4K	 DAK Full-Color 4K	 DAK Full-Color 4K
Image Sensor	1/1.8" 8MP CMOS	1/2.8" 8MP CMOS	1/2.8" 8MP CMOS	1/2.8" 8MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 - 12 mm motorized lens	2.8 - 12 mm motorized lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB True WDR	120 dB True WDR
Max. IR Distance	98 ft, White LED	131 ft, White LED	164 ft, White LED	164 ft, White LED
Max. Resolution & Frame Rate	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic Built-in Speaker	1/1 Built-in Mic	1/1 Built-in Mic
Alarm I/O	1/1	-	-	-
Protection	IP67	IP66	IP67	IP67
Memory Slot	1 TB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B9-W (17) AR-139W (-) CEM-139W (-) WP-139W (21)		 B9-W (17) BRACKET11-W (22)	 B9-G (13) BRACKET11-G (19)

	VALUE IP CAMERA NDAA	PRO IP CAMERA NDAA	PRO IP CAMERA NDAA	PRO IP CAMERA NDAA
Models	IP-5IRD8S3B5-GMZ	IP-5IRD2S4H5-MZ	IP-5IR4C4A2-28 NEW	IP-5IR4C22-28-PA
	 DAK 4K	 DAK	 DAK AI-ISP FD AI	 DAK Full-Color Active Deterrence
Image Sensor	1/2.8" 8MP CMOS	1/2.8" 2MP CMOS	1/1.79" 4MP CMOS	1/3" 4MP CMOS
Lens	2.8 - 12 mm motorized lens	2.8 - 12 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB True WDR	-	120 dB true WDR
Max. IR Distance	164 ft	164 ft	98 ft, White LED	131 ft, White LED
Max. Resolution & Frame Rate	8MP (3840×2160) @ 20 fps	2MP (1920×1080) @ 30 fps	4MP (2688×1520) @ 30 fps	4MP (2592×1520) @ 30 fps
Audio I/O	1/- Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic
Alarm I/O	-	-	-	1/1
Protection	IP67	IP67	IP67	IP66
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	512 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B9-G (13) BRACKET11-G (19) UJB120-G (13)	 B9-W (17) BRACKET11-W (22)		 B8-W (15) UJB94-W (13)

	PRO IP CAMERA NDAA	PRO IP CAMERA NDAA	PRO IP CAMERA NDAA	PRO IP CAMERA NDAA
Models	IP-5IR4E3BA2-28	IP-5IR4C22-MZ-PA	IP-5IR4E3BA3-MZ	IP-5IR4E3BA3-MZ-722
	 FD AI	 Full-Color Active Deterrence FD AI	 FD AI	 FD AI
Image Sensor	1/3" 4MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS
Lens	2.8 mm fixed lens	2.8 - 12 mm motorized lens	2.8 - 12 mm motorized lens	7 - 22 mm motorized lens
Wide Dynamic Range	120 dB True WDR	120 dB true WDR	120 dB True WDR	120 dB True WDR
Max. IR Distance	164 ft	131 ft, White LED	229 ft	328 ft
Max. Resolution & Frame Rate	4MP (2592×1520) @ 30 fps	4MP (2592×1520) @ 30 fps	4MP (2592×1520) @ 30 fps	4MP (2592×1520) @ 30 fps
Audio I/O	1/-	1/1 Built-in Mic	1/1	1/1
Alarm I/O	-	1/1	1/1	1/1
Protection	IP67	IP66	IP67	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B8-W (15)  UJB94-W (13)	 B8-W (15)  UJB94-W (13)	 B11-W (11)	 B11-W (11)
	I	I I	I	I



	PRO IP CAMERA NDAA	PRO IP CAMERA NDAA	PRO IP CAMERA NDAA	PRO IP CAMERA NDAA
Models	IP-5VP4E3BA1-28	IP-5VP4E3BA3-MZ	IP-5IRD4C4A5-28 NEW	IP-5IRD4E4B4-28 NEW
	 FD AI	 FD AI	 DARK AI-ISP FD AI	 AI-ISP FD AI
Image Sensor	1/3" 4MP CMOS	1/3" 4MP CMOS	1/1.79" 4MP CMOS	1/1.79" 4MP CMOS
Lens	2.8 mm fixed lens	2.8 - 12 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	-	-
Max. IR Distance	66 ft	164 ft	98 ft, White LED	98 ft, White LED
Max. Resolution & Frame Rate	4MP (2592×1520) @ 30 fps	4MP (2592×1520) @ 30 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic
Alarm I/O	1/1	1/1	-	-
Protection	IP67, IK10	IP67, IK10	IP67	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	512 GB micro SD slot	512 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B6-W-2 (17)  UWB129-W (20)	 B10-W (18)  BRACKET12-W (22)	 B9-W (17)  BRACKET11-W (22)	 B9-W (17)  BRACKET11-W (22)
	I			


	PRO IP CAMERA NDA	PRO IP CAMERA NDA	PRO IP CAMERA NDA	PRO IP CAMERA NDA
Models	IP-5IRD4C3H5-28	IP-5IRD4C24-28	IP-5IRD4E3BA4-28	IP-5IRD4C25-28-PA
	 Full-Color FD AI	 Full-Color	 FD AI	 Full-Color Active Deterrence FD AI
Image Sensor	1/1.79" 4MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	DWDR	120 dB true WDR	120 dB True WDR	120 dB True WDR
Max. IR Distance	66 ft, White LED	98 ft, White LED	98 ft, White LED	131 ft, White LED
Max. Resolution & Frame Rate	4MP (2688×1520) @ 30 fps	4MP (2560×1440) @ 30 fps	4MP (2592×1520) @ 30 fps	4MP (2592×1520) @ 30 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic Built-in Speaker
Alarm I/O	1/1	-	-	1/1
Protection	IP67	IP67	IP67	IP66
Memory Slot	1 TB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B9-W (17) BRACKET11-W (22)	 B8-W (15) BRACKET11-W (22) UJB94-W (13)	 B8-W (15) BRACKET11-W (22)	 B9-W (17) BRACKET11-W (22)
	I			

	PRO IP CAMERA NDA	PRO IP CAMERA NDA	PRO IP CAMERA NDA	PRO IP CAMERA NDA
Models	IP-5IRD4E3BA5-MZ	IP-5IRD4C25-MZ-PA	IP-5VP5E3B1-28	IP-5IR8E3B2-28
	 FD AI	 Full-Color Active Deterrence FD AI	 FD AI	 4K FD AI
Image Sensor	1/3" 4MP CMOS	1/3" 4MP CMOS	1/2.7" 5MP CMOS	1/2.8" 8MP CMOS
Lens	2.8 - 12 mm motorized lens	2.8 - 12 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB True WDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	164 ft	131 ft, White LED	98 ft	164 ft
Max. Resolution & Frame Rate	4MP (2592×1520) @ 30 fps	4MP (2592×1520) @ 30 fps	5MP (2592×1944) @ 30 fps	8MP (3840×2160) @ 30 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic Built-in Speaker	1/- Built-in Mic	1/-
Alarm I/O	-	1/1	-	-
Protection	IP67	IP66	IP67, IK10	IP67
Memory Slot	128 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B9-W (17) BRACKET11-W (22) UJB120-W (14)	 B9-W (17) BRACKET11-W (22)	 B6-W-2 (17) BRACKET11-W (22) UJB129-W (15) UWB129-W (20)	 B8-W (15) UJB94-W (13)
	I		I	

	PRO IP CAMERA NDA	PRO IP CAMERA NDA	PRO IP CAMERA NDA	PRO IP CAMERA NDA
Models	IP-5IR8C2H2-28-PA	IP-5IR8E3B3-MZ	IP-5IR8C2H3-MZ-PA	IP-5VP8E3B1-28
	 Full-Color Active Deterrence 4K FD AI	 4K FD AI	 Full-Color Active Deterrence 4K FD AI	 4K FD AI
Image Sensor	1/1.8" 8MP CMOS	1/2.8" 8MP CMOS	1/1.8" 8MP CMOS	1/2.8" 8MP CMOS
Lens	2.8 mm fixed lens	2.8 - 12 mm motorized lens	2.8 - 12 mm motorized lens	2.8 mm fixed Lens
Wide Dynamic Range	120 dB True WDR	120 dB true WDR	120 dB True WDR	120 dB true WDR
Max. IR Distance	131 ft, White LED	230 ft	164 ft, White LED	98 ft
Max. Resolution & Frame Rate	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 30 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 30 fps
Audio I/O	1/1 Built-in Mic Built-in Speaker	1/1 Built-in Mic	1/1 Built-in Mic Built-in Speaker	1/1 Built-in Mic
Alarm I/O	1/1	1/1	1/1	1/1
Protection	IP66	IP67	IP66	IP67, IK10
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B8-W (15)  UJB94-W (13)	 B11-W (11)  UJB120-W (14)	 B11-W (11)	 B6-W-2 (17)  BRACKET11-W (22)  UJB129-W (15)  UWB129-W (20)
		I		I

	PRO IP CAMERA NDA	PRO IP CAMERA NDA	PRO IP CAMERA NDA	PRO IP CAMERA NDA
Models	IP-5VP8E3B3-MZ	IP-5IRD8C4A5-28 NEW	IP-5IRD8E3B4-28	IP-5IRD8C2H5-28-PA
	 4K FD AI	 DARK AI-ISP 4K FD AI	 4K FD AI	 Full-Color Active Deterrence 4K FD AI
Image Sensor	1/2.8" 8MP CMOS	1/1.8" 8MP CMOS	1/2.8" 8MP CMOS	1/1.8" 8MP CMOS
Lens	2.8 - 12 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	-	120 dB true WDR	120 dB True WDR
Max. IR Distance	164 ft	98 ft, White LED	98 ft	131 ft, White LED
Max. Resolution & Frame Rate	8MP (3840×2160) @ 30 fps	8MP (3840×2160) @ 30 fps	8MP (3840×2160) @ 30 fps	8MP (3840×2160) @ 20 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic	1/- Built-in Mic	1/1 Built-in Mic Built-in Speaker
Alarm I/O	1/1	-	-	1/1
Protection	IP67, IK10	IP67	IP67	IP66
Memory Slot	256 GB micro SD slot	1 TB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B10-W (18)  BRACKET12-W (22)  UJB155-W (15)  UWB155-W (20)	 B9-W (17)  AR-139W (-) CEM-139W (-) WP-139W (21)	 B8-W (15)  BRACKET11-W (22)	 B9-W (17)  BRACKET11-W (22)

	PRO IP CAMERA NDAA	PRO IP CAMERA NDAA	PROJECT IP CAMERA NDAA	PROJECT IP CAMERA NDAA
Models	IP-5IRD8E3B5-MZ	IP-5IRD8C2H5-MZ-PA	IP-5IR4A3H4-MZ-LR	IP-5IR4A3B4-MZ-LR
	 	 	 	 
Image Sensor	1/2.8" 8MP CMOS	1/1.8" 8MP CMOS	1/1.8" 4MP CMOS	1/1.8" 4MP CMOS
Lens	2.8 - 12 mm motorized lens	2.8 - 12 mm motorized lens	8 - 32 mm motorized lens	8 - 32 mm motorized lens
Wide Dynamic Range	120 dB true WDR	120 dB True WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	164 ft	98 ft, White LED	328 ft	328 ft
Max. Resolution & Frame Rate	8MP (3840×2160) @ 30 fps	8MP (3840×2160) @ 20 fps	4MP (2592×1520) @ 30 fps	4MP (2592×1520) @ 30 fps
Audio I/O	1/- 	1/1  	1/1	1/1
Alarm I/O	-	1/1	1/1	1/1
Protection	IP67	IP66	IP67	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B9-W (17) BRACKET11-W (22)	 B9-W (17) BRACKET11-W (22)	 B11-W (11) PTM-501 (30) PTM-503 (30)	 B11-W (11) PTM-501 (30) PTM-503 (30)
	I			I I

	PROJECT IP CAMERA	PROJECT IP CAMERA NDAA	PROJECT IP CAMERA NDAA	PROJECT IP CAMERA
Models	IP-5IR2M06MZ-FR722	IP-5UF4S4C7-28	IP-5UF4E3BA7-28	IP-5MS8E3
	 	 	 	 
Price	\$109	\$149	\$135	\$1,155
Image Sensor	1/2.8" 2MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS	1/2.8" 8MP CMOS
Lens	7 - 22 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens	4.0 mm fixed lens
Wide Dynamic Range	DWDR	120 dB True WDR	120 dB True WDR	DWDR
Max. IR Distance	164 ft, White LED	67 ft	66 ft	82 ft
Max. Resolution & Frame Rate	2MP (1920×1080) @ 30 fps	4MP (2592×1520) @ 30 fps	4MP (2592×1520) @ 30 fps	8MP (3840×2160) @ 30 fps
Audio I/O	1/1	1/1 	1/1 	1/1
Alarm I/O	1/1	1/1	1/1	1/1
Protection	IP67	IP67	IP67	IP67
Memory Slot	128 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / 24 V AC / PoE	12 V DC / PoE	12 V DC / PoE	24 V AC / 12 V DC / PoE+
Accessories	 B9-W (17) UJB120-W (14)	 B6-W (13) B11-W (11)	 B6-W (13) B11-W (11)	

	PROJECT IP CAMERA NDAA	PROJECT IP CAMERA NDAA	PROJECT IP CAMERA NDAA	PROJECT IP CAMERA NDAA
Models	IP-5IRD5E15-3-VT2	IP-5FS6006N-A	IP-5FSA006N	IP-5DT8E3B-28
	 Active Deterrence Thermal FD AI	 Fisheye	 4K Fisheye	 Full-Color 4K PANO
Image Sensor	1/2.7" 5MP CMOS	1/2.5" 6MP CMOS	1/1.7" 12MP CMOS	1/2.7" 2× 4MP CMOS
Lens	4.0 mm fixed lens (3.2 mm Thermal lens)	1.65 mm fixed lens	1.65 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB True WDR	DWDR	DWDR
Max. IR Distance	98 ft	66 ft	66 ft	66 ft, White LED
Max. Resolution & Frame Rate	5MP (2592×1944) @ 30 fps	5MP (2592×1944) @ 20 fps	12MP (3000×3000) @ 30 fps	8MP (4640×1760) @ 30 fps
Audio I/O	1/1 Built-in Speaker	1/1 Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic Built-in Speaker
Alarm I/O	1/1	1/1	1/1	1/1
Protection	IP66	IP67	IP67	IP66
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 B9-W (17)  BRACKET11-W (22)  BRACKET12-W (22)  PTM-503 (30)	 B12-W (14)	 B12-W (14)	 UJB155-W (15)

	PROJECT IP CAMERA	PROJECT IP CAMERA NDAA
Models	IP-5PO8M3	IP-5IR4SP6-28-KIT
	 4K PANO	 Solar 4G
Image Sensor	1/2.8" 4× 2MP CMOS	1/1.8" 4MP CMOS
Lens	3.3 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR
Max. IR Distance	66 ft	66 ft, White LED
Max. Resolution & Frame Rate	8MP (4096×1800) @ 30 fps	4MP (2560×1440) @ 30 fps
Audio I/O	1/1	1/1 Built-in Mic Built-in Speaker
Alarm I/O	1/1	-
Protection	IP67, IK10	IP67
Memory Slot	128 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	123 Ah Battery
Accessories	 B10-W (18)  UJB155-W (15)	



	NETWORK PTZ	NETWORK PTZ NDAA	NETWORK PTZ NDAA	NETWORK PTZ NDAA
Models	IP-5PT4IE3N8-4X	IP-5PT4ISN27-25X	IP-5PT4IE3-40X-2	IP-5PT8ISN27-25X-2
	 Active Deterrence Auto-Tracking	 Auto-Tracking FD	 Auto-Tracking FD	 Auto-Tracking 4K FD
Image Sensor	1/2.5" 4MP CMOS	1/2.8" 4MP CMOS	1/2.7" 4MP CMOS	1/2.8" 8MP CMOS
Lens	2.8 - 12 mm motorized lens 4x	4.8 - 120 mm motorized lens 25x	4.5 - 180 mm motorized lens 40x	4.8 - 120 mm motorized lens 25x
Wide Dynamic Range	DWDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	164 ft	492 ft	1148 ft	492 ft
Max. Resolution & Frame Rate	4MP (2560×1440) @ 25 fps	4MP (2560×1440) @ 30 fps	4MP (2880×1620) @ 30 fps	8MP (3840×2160) @ 30 fps
Audio I/O	1/1 Built-in Mic Built-in Speaker	1/1	1/1	1/1
Alarm I/O	1/1	1/1	1/1	1/1
Protection	IP67, IK10	IP66	IP67, IK10	IP66, IK10
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE+	12 V DC / PoE+	24 V DC / PoE++	12 V DC / PoE+
Accessories	 BRACKET13-W (37)	 PTM-501 (30)  PTM-503 (30)  PTM-504 (30)	 PTM-501 (30)  PTM-503 (30)  PTM-504 (30)	 PTM-501 (30)  PTM-503 (30)  PTM-504 (30)

Mini Management Server & Encoder		
	Model	Description
	ED-A700-E1-A0	- VMS Station - Pre-installed software for management, video, and smart apps - Stable, reliable, with embedded Linux 256 channels, 64 devices, including third-party - H.264/H.265/H.265+/H.265S, 16MP, 16-channel playback - Human/vehicle, visitor management, alarm linkages
	ED-DVS1501E	1 CH encoder 5MP (2592×1944) full real time coding - H.265+ / H.265 / H.264+ / H.264 / MJPEG encoding - TVI/AHD/CVI: 5MP @ 20 fps; 4MP/1080P/720P @ 30 fps - Alarm I/O: 8/4, Audio I/O: 1/1 12 V DC / PoE

Other Accessories		
	Model	Description
	IP-PT1200	- Network PTZ controller - Supports remote upgrading by Web client - Seamless integration with NVMS - Up to 256 speed domes controllable in PTZ mode - Supports playback control of TV wall client - Supports control of decoding videos - Supports keypad tone
	IOT-RS232-01	- POS RS232 to Ethernet Converter 10/100 RJ45, RS232 DB9 5-7 V DC, 500 mA

	VALUE DVR NDAA	VALUE DVR NDAA	VALUE DVR NDAA	VALUE DVR NDAA
Models	ED8004H5-BN2	ED8008H5-BN2	ED8016H5-BN2	ED8216H5-DN2
				
	4 CH DVR	8 CH DVR	16 CH DVR	16 CH DVR
Video Compression	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265 / H.264	H.265 / H.264
Video Format	HDTVI / HDCVI / AHD / IP	HDTVI / HDCVI / AHD / IP	HDTVI / HDCVI / AHD / IP	HDTVI / HDCVI / AHD / IP
Max. BNC Recording Rate	5MP Lite @ 10 fps	5MP Lite @ 10 fps	5MP Lite @ 10 fps	5MP Lite @ 10 fps
Max. BNC Resolution	5MP	5MP	5MP	5MP
BNC Video Input	4 CH	8 CH	16 CH	16 CH
Bandwidth In/Out	36 Mbps / 40 Mbps	60 Mbps / 60 Mbps	32 Mbps / 80 Mbps	32 Mbps / 96 Mbps
Display	HDMI / VGA	HDMI / VGA	HDMI / VGA	HDMI / VGA
Playback	4	8	16 CH	16 CH
Audio In/Out	1/1 RCA	1/1 RCA	1/1 RCA	8/1, 2-way audio
Alarm In/Out	-	-	-	16/4
Ethernet Port	1× RJ-45 10/100 Mbps	1× RJ-45 10/100 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps
USB	2× USB 2.0	2× USB 2.0	2× USB 2.0	2× USB 2.0
Storage	1× 10 TB	1× 10 TB	1× 10 TB	2× 10 TB, 1× eSATA
Power	12 V DC	12 V DC	12 V DC	12 V DC
Video Analytics	VCA	VCA	VCA	VCA
				I

	VALUE DVR NDAA	PRO DVR NDAA	PRO DVR NDAA	PRO DVR NDAA
Models	ED8432H5-DN	ED8004H5-FN2	ED8208H5-FN2	ED8216H5-FN
				
	32 CH DVR	4 CH DVR 4K	8 CH DVR 4K	16 CH DVR 4K
Video Compression	H.265 / H.264	H.265+ / H.265 / H.264	H.265 / H.264	H.265 / H.264
Video Format	HDTVI / HDCVI / AHD / IP	HDTVI / HDCVI / AHD / IP	HDTVI / HDCVI / AHD / 960H / IP	HDTVI / HDCVI / AHD / IP
Max. BNC Recording Rate	5MP Lite @ 10 fps	8MP @ 8 fps	8MP @ 8 fps	8MP @ 8 fps
Max. BNC Resolution	5MP	8MP	8MP	8MP
BNC Video Input	32 CH	4 CH	8 CH	16 CH
Bandwidth In/Out	40 Mbps / 160 Mbps	40 Mbps / 40 Mbps	32 Mbps / 96 Mbps	32 Mbps / 96 Mbps
Display	HDMI / VGA	HDMI / VGA	HDMI / VGA	HDMI / VGA
Playback	16 CH	4	8 CH	16 CH
Audio In/Out	16/1, 2-way audio	4/1 RCA, 2-way audio	8/1 RCA, 2-way audio	4/1 RCA
Alarm In/Out	16/4	4/1	8/2	16/4
Ethernet Port	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps
USB	1× USB 2.0, 1× USB 3.0	2× USB 2.0	1× USB 2.0, 1× USB 3.0	1× USB 2.0, 1× USB 3.0
Storage	4× 10 TB, 1× eSATA	1× 10 TB, 1× eSATA	2× 10 TB, 1× eSATA	2× 10 TB, 1× eSATA
Power	110 V AC	12 V DC	12 V DC	12 V DC
Video Analytics	VCA	VCA	VCA	VCA

	PRO DVR NDAA
Models	ED8632H5-FN
	 32 CH DVR 4K
Video Compression	H.265 / H.264
Video Format	HDTVI / HDCVI / AHD / 960H / IP
Max. BNC Recording Rate	8MP @ 8 fps
Max. BNC Resolution	8MP
BNC Video Input	32 CH
Bandwidth In/Out	96 Mbps / 192 Mbps
Display	HDMI1 / VGA, HDMI2
Playback	16
Audio In/Out	16/1 RCA
Alarm In/Out	16/8
Ethernet Port	2× RJ-45 10/100/1000 Mbps
USB	1× USB 2.0, 1× USB 3.0
Storage	8× 10 TB
Power	110 V AC
Video Analytics	VCA



	VALUE HD CAMERA NDAA	VALUE HD CAMERA	VALUE HD CAMERA NDAA	VALUE HD CAMERA NDAA
Models	HDC-IRD2AS24-28 NEW	HDC-IRD2TE5/VF	HDC-IR5AS21-28 NEW	HDC-IR5AE32-MZ
	 Full-Color		 Full-Color	
Image Sensor	1/3" 2MP CMOS	1/2.9" 2MP CMOS	1/2.5" 5MP CMOS	1/2.7" 5MP CMOS
Lens	2.8 mm fixed lens	2.8 - 12 mm vari-focal lens	3.6 mm fixed lens	2.8 -12 mm fixed lens
Wide Dynamic Range	DWDR	DWDR	DWDR	DWDR
Max. IR Distance	98 ft, White LED	164 ft	98 ft, White LED	164 ft
Video Output	TVI, AHD, CVI, CVBS	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H	TVI / AHD / CVI / CVBS
Max. Resolution & Frame Rate	2MP (1920×1080) @ 30 fps	2MP (1920×1080) @ 30 fps	5MP (2944×1656) @ 20 fps	5MP (2592×1944) @ 20 fps
Audio I/O	1/- Built-in Mic	-	1/- Built-in Mic	-
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Power	12 V DC	12 V DC	12 V DC	12 V DC
Accessories	 B8-W (15)  BRACKET11-W (22)  UJB94-W (13)	 B9-W (17)  BRACKET11-W (22)  UJB120-W (14)	 B8-W (15)  UJB94-W (13)	 B8-W (15)

	VALUE HD CAMERA NDAA	VALUE HD CAMERA NDAA	VALUE HD CAMERA NDAA	VALUE HD CAMERA NDAA
Models	HDC-IR5AE2/MZ	HDC-VPD5AE31-28	HDC-VPD5AE33-MZ	HDC-IRD5AS24-28 NEW
				 Full-Color
Image Sensor	1/2.7" 5MP CMOS	1/2.5" 5MP CMOS	1/2.5" 5MP CMOS	1/2.5" 5MP CMOS
Lens	2.8 - 12 mm motorized lens	2.8 mm fixed lens	2.8 -12 mm motorized lens	2.8 mm fixed lens
Wide Dynamic Range	DWDR	DWDR	DWDR	DWDR
Max. IR Distance	164 ft	66 ft	98 ft	98 ft, White LED
Video Output	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	AHD, TVI, HDCVI, 960H
Max. Resolution & Frame Rate	5MP (2592×1944) @ 20 fps	5MP (2592×1944) @ 20 fps	5MP (2592×1944) @ 20 fps	5MP (2944×1656) @ 20 fps
Audio I/O	-	-	-	1/- Built-in Mic
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Power	12 V DC	12 V DC	12 V DC	12 V DC
Accessories	 B8-W (15)	 B6-W-2 (17)  BRACKET11-W (22)  UJB120-W (14)	 B10-W (18)	 B8-W (15)  BRACKET11-W (22)  UJB94-W (13)

	VALUE HD CAMERA NDAA	VALUE HD CAMERA NDAA	VALUE HD CAMERA NDAA	VALUE HD CAMERA NDAA
Models	HDC-IRD5AE34-G28	HDC-IRD5AE35-MZ	HDC-IRD5AE35-GMZ	HDC-IR8AE1/28
				 4K
Image Sensor	1/2.7" 5MP CMOS	1/2.7" 5MP CMOS	1/2.7" 5MP CMOS	1/2.5" 8MP CMOS
Lens	2.8 mm fixed lens	2.8 -12 mm motorized lens	2.8 -12 mm motorized lens	2.8 mm fixed Lens
Wide Dynamic Range	DWDR	DWDR	DWDR	DWDR
Max. IR Distance	164 ft	164 ft	164 ft	98 ft
Video Output	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS
Max. Resolution & Frame Rate	5MP (2592×1944) @ 20 fps	5MP (2592×1944) @ 20 fps	5MP (2592×1944) @ 20 fps	8MP (3840×2160) @ 15 fps
Audio I/O	- Built-in Mic	-	-	-
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Power	12 V DC	12 V DC	12 V DC	12 V DC
Accessories	 B8-G (12)  UJB94-G (13)	 BRACKET11-G (19)  B9-W (17)  BRACKET11-W (22)  UJB120-W (14)	 B9-G (13)  BRACKET11-G (19)  UJB120-G (13)	 B8-W (15)  UJB94-W (13)

	VALUE HD CAMERA NDAA	VALUE HD CAMERA NDAA	VALUE HD CAMERA NDAA	VALUE HD CAMERA NDAA
Models	HDC-IR8AE2/MZ	HDC-VPD8AE1/28	HDC-VPD8AE3/MZ	HDC-IRD8AE4/28
	 	 	 	 
Image Sensor	1/2.5" 8MP CMOS	1/2.5" 8MP CMOS	1/2.5" 8MP CMOS	1/2.5" 8MP CMOS
Lens	2.8 - 12 mm motorized lens	2.8 mm fixed lens	2.8 ~ 12 mm motorized lens	2.8 mm fixed lens
Wide Dynamic Range	DWDR	DWDR	DWDR	DWDR
Max. IR Distance	164 ft	66 ft	98 ft	98 ft
Video Output	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS
Max. Resolution & Frame Rate	8MP (3840×2160) @ 15 fps	8MP (3840×2160) @ 15 fps	8MP (3840×2160) @ 15 fps	8MP (3840×2160) @ 15 fps
Audio I/O	-	-	-	-
Alarm I/O	-	-	-	-
Protection	IP67	IP67, IK10	IP67, IK10	IP67
Power	12 V DC	12 V DC	12 V DC	12 V DC
Accessories	 B8-W (15)	 B6-W-2 (17)  BRACKET11-W (22)  UJB129-W (15)	 B10-W (18)	 B8-W (15)  BRACKET11-W (22)  UJB94-W (13)

	VALUE HD CAMERA NDAA	HDA CAMERA	HDA CAMERA	HDA CAMERA
Models	HDC-IRD8AE5/MZ	HDA-CM2M80-2.8	HDA-HI2M80A-3.7	HDA-IR2M18A-3.7
			 	 
Image Sensor	1/2.5" 8MP CMOS	1/2.9" 2MP CMOS	1/2.9" 2MP CMOS	1/2.9" 2MP CMOS
Lens	2.8 - 12 mm motorized lens	2.8 mm fixed Lens	3.7 mm fixed Lens	3.7 mm fixed Lens
Wide Dynamic Range	DWDR	DWDR	DWDR	DWDR
Max. IR Distance	164 ft	-	-	65 ft
Video Output	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS
Max. Resolution & Frame Rate	8MP (3840×2160) @ 15 fps		2MP (1920×1080) @ 30 fps	2MP (1920×1080) @ 30 fps
Audio I/O	-	-	-	-
Alarm I/O	-	-	-	-
Protection	IP67	-	-	-
Power	12 V DC	12 V DC	12 V DC	12 V DC
Accessories	 B9-W (17)  BRACKET11-W (22)  UJB120-W (14)			

	HDA CAMERA	HDA CAMERA	HDA CAMERA	HDA CAMERA
Models	HDA-HI2M80S-3.7	HDA-MI2M80-3.7	HDALPIR2M04HVFZWD622	HDA-IRB2M10HVFWDW550-S2
	 PIR Smoke			
Image Sensor	1/2.9" 2MP CMOS	1/2.7" 2MP CMOS	1/2.9" 2MP CMOS	1/2.9" 2MP CMOS
Lens	3.7 mm fixed Lens	3.7 mm fixed Lens	6 - 22 mm auto zoom Lens	5.0 - 50 mm focal lens
Wide Dynamic Range	DWDR	DWDR	120 dB true WDR	120 dB True WDR
Max. IR Distance	-	-	98 ft	328 ft
Video Output	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS
Max. Resolution & Frame Rate	2MP (1920×1080) @ 30 fps	2MP (1920×1080) @ 30 fps	2MP (1920×1080) @ 30 fps	2MP (1956×1266)
Audio I/O	-	-	-	-
Alarm I/O	-	-	-	-
Protection	-	-	IP66	IP66
Power	12 V DC	12 V DC	12 V DC	12 V DC
Accessories			 CM7020 (9)	 UJB120-W (14)

Doorbell		
	Model	Description
	ED-DB2-IC-W	• Max. resolution: 2MP (1920×1080) • Wide field of view achieving doorway security monitoring • Support door opening by swiping card or mobile APP • 2.4G Wi-Fi • Built-in micro SD card slot, up to 256 GB • Intelligent Analysis • PoE powered
	ED-DB2-CHIME	• Camera doorbell chime • Classic Tones • A variety of mounting options, easy to install • Adjustable volume and ring tone • Low battery reminder

Hidden Camera (Not Titanium Product)		
	Model	Description
	IP-5HI60HV-37	• 1/3" CMOS sensor • 6MP realtime resolution 3072×2048 • 3.7 mm Fixed Lens • DWDR, Mirror, Rotate, Defogging • IR LEDs • Support Alarm Snapshot to Email and FTP • Strong water-proof housing, IP65
	IP-CM60CV-28	• 1/2.8" CMOS Sensor • 6MP HD resolution output • 2.8mm Fixed Lens • Face Detection, Human & Vehicle Detection • True WDR • 1 pc SMD IR LED, IR distance 5-8 m • Strong Water-proof Housing, IP65



VALUE NVR NDAA	
Models	NVR304-16E2-P16
	 16 CH NVR 4K
Video Compression	Ultra H.265 / H.265 / H.264
Max. Recording Resolution	12MP
Recording Rate	12MP @ 30 fps
IP Video Input	16 CH
Bandwidth In/Out	320 Mbps / 320 Mbps
Display	HDMI / VGA
Playback	16
Audio In/Out	1/1 RCA
Alarm In/Out	16/4
Ethernet	1× RJ-45 10/100/1000 Mbps
PoE Ports	16
USB	1× USB 2.0, 1× USB 3.0
Storage	4× 10 TB
Power	100 ~ 240 V AC
Video Analytics	VCA

	VALUE NVR NDAA	VALUE NVR NDAA	PRO NVR NDAA	PRO NVR NDAA
Models	NVR304-32S-P16	NVR304-32X	NVR501-08B-P8	NVR502-08B-P8
	 32 CH NVR 4K	 32 CH NVR 4K	 8 CH NVR AI 4K	 8 CH NVR AI 4K
Video Compression	Ultra H.265 / H.265 / H.264	Ultra H.265 / H.265 / H.264	Ultra H.265 / H.265 / H.264	Ultra H.265 / H.265 / H.264
Max. Recording Resolution	8MP	12MP	8MP	16MP
Recording Rate	8MP @ 30 fps	12MP @ 30 fps	8MP @ 30 fps	16MP @ 30 fps
IP Video Input	32 CH	32 CH	8 CH	8 CH
Bandwidth In/Out	160 Mbps / 64 Mbps	384 Mbps / 384 Mbps	80 Mbps / 64 Mbps	320 Mbps / 160 Mbps
Display	HDMI / VGA	HDMI1 / HDMI2, VGA	HDMI / VGA	HDMI / VGA
Playback	32	16	8	8
Audio In/Out	1/1 RCA	1/1 RCA	1/1 RCA	1/1 RCA
Alarm In/Out	16/4	16/4	-	8/2
Ethernet	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100 Mbps	1× RJ-45 10/100/1000 Mbps
PoE Ports	16	-	8	8
USB	1× USB 2.0, 1× USB 3.0	2× USB 2.0, 1× USB 3.0	1× USB 2.0, 1× USB 3.0	1× USB 2.0, 1× USB 3.0
Storage	4× 14 TB	4× 10 TB	1× 16 TB	2× 16 TB
Power	100 ~ 240 V AC	100 ~ 240 V AC	52 V DC	100 ~ 240 V AC
Video Analytics	VCA	VCA	VCA	VCA


	PRO NVR NDAA	PRO NVR NDAA	PRO NVR	PRO NVR NDAA
Models	NVR502-08B-P8-IQ NEW	NVR502-16B-P16	NVR502-16B-P16-IQ NEW	NVR502-32B-P16
	 8 CH NVR  	 16 CH NVR  	 16 CH NVR  	 32 CH NVR  
Video Compression	Ultra H.265 / H.265 / H.264	Ultra H.265 / H.265 / H.264	Ultra H.265 / H.265 / H.264	Ultra H.265 / H.265 / H.264
Max. Recording Resolution	16MP	16MP	16MP	16MP
Recording Rate	16MP @ 30 fps	16MP @ 30 fps	16MP @ 30 fps	16MP @ 30 fps
IP Video Input	8 CH	16 CH	16 CH	32 CH
Bandwidth In/Out	320 Mbps / 160 Mbps	320 Mbps / 160 Mbps	320 Mbps / 160 Mbps	320 Mbps / 160 Mbps
Display	HDMI / VGA	HDMI, VGA (Independent)	HDMI, VGA (Independent)	HDMI, VGA (Independent)
Playback	16	16	16	16
Audio In/Out	1/1 RCA	1/1 RCA	1/1 RCA	1/1 RCA
Alarm In/Out	8/2	8/2	8/2	8/2
Ethernet	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps
PoE Ports	8	16	16	16
USB	2× USB 2.0, 1× USB 3.0	1× USB 2.0, 1× USB 3.0	2× USB 2.0, 1× USB 3.0	1× USB 2.0, 1× USB 3.0
Storage	2× 16 TB	2× 16 TB	2× 16 TB	2× 16 TB
Power	100 ~ 240 V AC	100 ~ 240 V AC	100 ~ 240 V AC	100 ~ 240 V AC
Video Analytics				

	PRO NVR NDAA	PRO NVR	PRO NVR NDAA	PROJECT NVR NDAA
Models	NVR504-32B-P16	NVR508-64E-IQ NEW	NVR508-128E-R	UNICORN
	 32 CH NVR  	 64 CH NVR  	 128 CH NVR  	 2000 CH NVR 
Video Compression	Ultra H.265 / H.265 / H.264	Ultra H.265 / H.265 / H.264	Ultra H.265 / H.265 / H.264	Ultra H.265 / H.265 / H.264
Max. Recording Resolution	16MP	32MP	32MP	12MP
Recording Rate	16MP @ 30 fps	32MP @ 30 fps	32MP @ 30 fps	12MP @ 30 fps
IP Video Input	32 CH	64 CH	128 CH	2000 CH
Bandwidth In/Out	320 Mbps / 160 Mbps	384 Mbps / 384 Mbps	384 Mbps / 384 Mbps	512 Mbps / 384 Mbps
Display	HDMI, VGA (Independent)	HDMI, VGA (Independent)	HDMI, VGA (Independent)	HDMI1 / VGA, HDMI2
Playback	16	16	16	16
Audio In/Out	1/1 RCA	1/2 RCA	1/2 RCA	1/1
Alarm In/Out	16/4	16/10	16/10	24/8
Ethernet	1× RJ-45 10/100/1000 Mbps	2× RJ-45 10/100/1000 Mbps	2× RJ-45 10/100/1000 Mbps	4× RJ-45 10/100/1000 Mbps
PoE Ports	16	-	-	-
USB	1× USB 2.0, 1× USB 3.0	1× USB 2.0, 1× USB 3.0	1× USB 2.0, 1× USB 3.0	4× USB 3.0
Storage	4× 16 TB	8× 16 TB	8× 16 TB	16× 14 TB
Power	100 ~ 240 V AC	100 ~ 240 V AC	100 ~ 240 V AC	100 ~ 240 V AC
Video Analytics				

	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA NDAA	VALUE IP CAMERA
Models	EC-B4F28M-V3	EC-D4F28M-V3	EC-B8F28M	EC-T8F28M
			 4K	 4K
Image Sensor	1/2.9" 4MP CMOS	1/2.9" 4MP CMOS	1/2.7" 8MP CMOS	1/2.7" 8MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed Lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft	98 ft	98 ft	98 ft
Max. Resolution & Frame Rate	4MP (2560×1440) @ 20 fps	4MP (2560×1440) @ 20 fps	8MP (3840×2160) @ 15 fps	8MP (3840×2160) @ 15 fps
Audio I/O	- Built-in Mic	-	- Built-in Mic	- Built-in Mic
Alarm I/O	-	-	-	-
Protection	IP67	IP67, IK10	IP67	IP67
Memory Slot	128 GB micro SD slot	128 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 TR-JB05-A-IN (18)	 TR-JB03-G-IN (16)  TR-WM03-D-IN (25)  TR-JB07/MM03-F-IN (40)	 TR-JB05-B-IN (22)	 TR-JB03-H-IN (18)  TR-WM03-B-IN (25)  TR-JB07/MM03-F-IN (40)
	I			

	PRO IP CAMERA NDAA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	IPC2124LE-ADF28KMC-WL	IPC2124SR3-ADF28KMC-DL (IPC2124SR3-ADF28KMC-DL-E)	IPC2124SB-ADF28KMC-IO	IPC2314SB-ADF40KM-IO
	 Full-Color	 Full-Color FD	 Active Deterrence FD AI	 AI
Image Sensor	1/3" 4MP CMOS	1/3" 4MP CMOS	1/2.7" 4MP CMOS	1/2.7" 4MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed Lens	4.0 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft, White LED	98 ft, White LED	98 ft, White LED	262 ft
Max. Resolution & Frame Rate	4MP (2688×1520) @ 25 fps	4MP (2688×1520) @ 25 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 25 fps
Audio I/O	- Built-in Mic Built-in Speaker	- Built-in Mic Built-in Speaker	- Built-in Mic Built-in Speaker	- Built-in Mic
Alarm I/O	-	-	-	1/1
Protection	IP67	IP67	IP67	IP67
Memory Slot	128 GB micro SD slot	128 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 TR-JB05-B-IN (22)  UJB94-W (13)	 TR-JB05-B-IN (22)  UJB94-W (13)	 TR-JB05-B-IN (22)  UJB94-W (13)	 TR-JB05-B-IN (22)

	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	IPC2324SR5-ADZK-H	IPC2324SB-DZK-IO	IPC324SR-ADF28KM-H NEW
			
Image Sensor	1/3" 4MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS
Lens	2.8 - 12 mm motorized lens	2.7 - 13.5 mm motorized lens	2.8 mm fixed Lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	164 ft	164 ft	98 ft
Max. Resolution & Frame Rate	4MP (2688×1520) @ 25 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps
Audio I/O	- 	1/1	-
Alarm I/O	-	1/1	-
Protection	IP67	IP67, IK10	IP67, IK10
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	512 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 TR-JB05-B-IN (22)	 TR-JB07-D-IN (32)	 TR-JB03-G-IN (16)  TR-WM03-D-IN (25)  TR-JB07-WM03-F-IN (40)

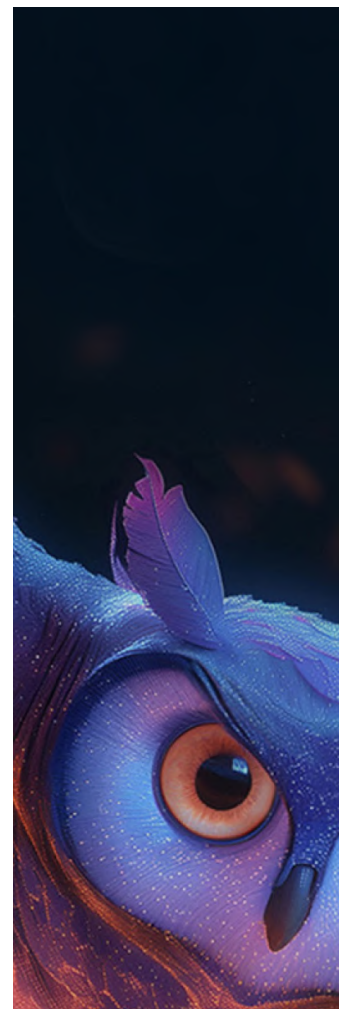

	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	IPC324SB-DF28K-IO	IPC3514SR-ADF28KM-WP	IPC314SB-ADF28K-IO	IPC314SB-ADF28K-IO-BK
				
Image Sensor	1/3" 4MP CMOS	1/1.8" 4MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS
Lens	2.8 mm fixed Lens	2.8 mm fixed Lens	2.8 mm fixed Lens	2.8 mm fixed Lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft	98 ft	98 ft	98 ft
Max. Resolution & Frame Rate	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 25 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps
Audio I/O	- 	- 	- 	1/1 
Alarm I/O	1/1	-	-	-
Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 TR-JB03-G-IN (16)  TR-WM03-D-IN (25)  TR-JB07-WM03-F-IN (40)	 TR-JB03-H-IN (18)  TR-WM03-B-IN (25)	 TR-JB03-G-IN (16)  TR-WM03-D-IN (25)  TR-JB07-WM03-F-IN (40)	 TR-JB03-G-IN-BK (14)  TR-WM03-D-IN (25)  TR-JB07-WM03-F-IN (40)



	PRO IP CAMERA NDAA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	IPC324SS-ADF28K-I1	IPC3534SR4-ADZK-H	IPC3234SB-ADZK-I0	IPC3614SB-ADF28KMC-I0 NEW
				 Full-Color
Image Sensor	1/3" 4MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS	1/2.7" 4MP CMOS
Lens	2.8 mm fixed Lens	2.8 - 12 mm motorized lens	2.7 - 13.5 mm motorized lens	2.8 mm fixed Lens
Wide Dynamic Range	130 dB true WDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	131 ft	131 ft	131 ft	98 ft
Max. Resolution & Frame Rate	4MP (2688×1520) @ 30 fps	4MP (2560×1440) @ 25 fps	4MP (2688×1520) @ 30 fps	8MP (3840×2160) @ 30 fps
Audio I/O	- Built-in Mic	- Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic
Alarm I/O	1/1	-	1/1	-
Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories		 TR-JB03-H-IN (18)  TR-WM03-B-IN (25)	 TR-JB03-G-IN (16)  TR-WM03-B-IN (25)	 TR-JB03-G-IN (16)
		 TR-JB07/WM03-F-IN (40)	 TR-JB07/WM03-F-IN (40)	

	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	IPC3614LB-AF28K-DL	IPC3614SR-ADF28KMC-DL-H NEW	IPC3614SR3-ADF28KMC-DL-BK	IPC3614SB-ADF28KMC-I0
				
Image Sensor	1/3" 4MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS
Lens	2.8 mm fixed Lens	2.8 mm fixed Lens	2.8 mm fixed Lens	2.8 mm fixed Lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft, White LED	98 ft, White LED	98 ft, White LED	98 ft, White LED
Max. Resolution & Frame Rate	4MP (2560×1440) @ 30 fps	4MP (2688×1520) @ 25 fps	4MP (2688×1520) @ 25 fps	4MP (2688×1520) @ 30 fps
Audio I/O	- Built-in Mic	- Built-in Mic Built-in Speaker	- Built-in Mic Built-in Speaker	- Built-in Mic
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Memory Slot	128 GB micro SD slot	128 GB micro SD slot	128 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories		 TR-JB03-G-IN (16) TR-WM03-D-IN (25)	 TR-JB03-G-IN-BK (14) TR-WM03-D-IN (25)	 TR-JB03-G-IN (16) TR-WM03-D-IN (25)

	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	IPC3614SR-ADF28KMC-H NEW	IPC3624SR-ADF28KMC-WP	IPC3634SE-ADF28K-WP-I1 NEW	IPC3634SS-ADF28KMC-I1
			 AI-ISP	
Image Sensor	1/3" 4MP CMOS	1/1.8" 4MP CMOS	1/1.8" 4MP CMOS	1/2.7" 4MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed Lens	2.8 mm fixed lens	2.8 mm fixed Lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	130 dB true WDR	130 dB true WDR
Max. IR Distance	98 ft	98 ft, White LED	98 ft	98 ft, White LED
Max. Resolution & Frame Rate	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 25 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps
Audio I/O	- Built-in Mic	- Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic Built-in Speaker
Alarm I/O	-	-	1/1	1/1
Protection	IP67	IP67	IP67	IP67
Memory Slot	512 GB micro SD slot	256 GB micro SD slot	512 GB micro SD slot	512 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 TR-JB03-G-IN (16) TR-WM03-D-IN (25)	 TR-JB03-I-IN (18) TR-WM03-D-IN (25)	 TR-JB03-H-IN (18)	

	PRO IP CAMERA NDA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	IPC3634SR4-ADZK-H	IPC3634SB-ADZK-I0	IPC3615LB-AF28K-DL NEW	IPC3615SR-ADF28KM-H NEW
		 	 	
Image Sensor	1/3" 4MP CMOS	1/3" 4MP CMOS	1/1.8" 5MP CMOS	1/1.8" 5MP CMOS
Lens	2.8 - 12 mm motorized lens	2.7 - 13.5 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	-	-
Max. IR Distance	131 ft	131 ft	98 ft	98 ft
Max. Resolution & Frame Rate	4MP (2688×1520) @ 25 fps	4MP (2688×1520) @ 30 fps	5MP	5MP
Audio I/O	- 	- 	-	-
Alarm I/O	-	-	-	-
Protection	IP67	IP67, IK10	IP67	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	512 GB micro SD slot	512 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	    	  		  

	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	IPC3635SS-ADF28KMC-I1 NEW	IPC2128SE-ADF28KM-WL-I0-E	IPC2128SB-ADF28KMC-I0	IPC2328SB-DZK-I0-E
		   	  	 
Image Sensor	1/1.8" 5MP CMOS	1/2.8" 8MP CMOS	1/2.7" 8MP CMOS	1/2.8" 8MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed Lens	2.8 mm fixed Lens	2.8 mm fixed lens
Wide Dynamic Range	-	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft	98 ft	98 ft	164 ft
Max. Resolution & Frame Rate	5MP	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps
Audio I/O	-  	- 	-  	1/1
Alarm I/O	-	-	-	1/1
Protection	IP67	IP67	IP67	IP67, IK10
Memory Slot	512 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	  	 		  

	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	IPC318SR3-ADF28KM-G NEW	IPC328SR-ADF28KM-H NEW	IPC328SB-ADF28K-IO	IPC3638SE-ADF28K-WL-IO NEW
	 Full-Color 4K	 4K	 4K	 Full-Color 4K
Image Sensor	1/3" 8MP CMOS	1/2.8" 8MP CMOS	1/2.7" 8MP CMOS	1/1.8" 8MP CMOS
Lens	2.8 mm fixed Lens	2.8 mm fixed Lens	2.8 mm fixed Lens	2.8 mm fixed Lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft	98 ft	98 ft	98 ft
Max. Resolution & Frame Rate	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 30 fps
Audio I/O	1/1 Built-in Mic	- Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic
Alarm I/O	-	-	1/1	1/1
Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Memory Slot	256 GB micro SD slot	512 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories		 TR-JB03-G-IN (16) TR-WM03-B-IN (25)  TR-JB07/MM03-F-IN (40)	 TR-JB03-G-IN (16) TR-WM03-D-IN (25)  TR-JB07/MM03-G-IN (40)	

	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA NDA
Models	IPC3618SR-ADF28KMC-DL-H NEW	IPC3638SE-ADF28K-WP-I1 NEW	IPC3618SR-ADF28KM-H NEW	IPC3618SR3-ADF28KM-G-E
	 Full-Color 4K	 AI-ISP 4K	 4K	 4K
Image Sensor	1/2.8" 8MP CMOS	1/1.8" 8MP CMOS	1/2.8" 8MP CMOS	1/2.7" 8MP CMOS
Lens	2.8 mm fixed Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	-	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft with warm LED	98 ft	98 ft	98 ft
Max. Resolution & Frame Rate	8MP (3840×2160) @ 20 fps	5MP	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps
Audio I/O	- Built-in Mic Built-in Speaker	- Built-in Mic	- Built-in Mic	- Built-in Mic
Alarm I/O	-	1/1	-	-
Protection	IP67	IP67	IP67	IP67
Memory Slot	512 GB micro SD slot	512 GB micro SD slot	512 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories		 TR-JB03-G-IN (16) TR-WM03-D-IN (25)  TR-JB07/MM03-G-IN (40)	 TR-JB03-G-IN (16) TR-WM03-D-IN (25)  TR-JB07/MM03-G-IN (40)	 TR-JB03-G-IN (16) TR-WM03-D-IN (25)  TR-JB07/MM03-G-IN (40)

	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA	PROJECT IP CAMERA
Models	IPC3618SR3-ADF28KM-G-BK	IPC3618SB-ADF28KMC-IO	IPC3638SS-ADF28KMC-I1	IPC2B28SS-ADZK-I1
	 4K	 4K	 4K RB	
Image Sensor	1/2.7" 8MP CMOS	1/2.8" 8MP CMOS	1/2.8" 8MP CMOS	1/3" 4MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed Lens	2.8 mm fixed Lens	2.7 - 13.5 mm motorized lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	130 dB true WDR	130 dB true WDR
Max. IR Distance	98 ft	98 ft, White LED	98 ft, White LED	196 ft
Max. Resolution & Frame Rate	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 30 fps	4MP (2688×1520) @ 30 fps
Audio I/O	- Built-in Mic	- Built-in Mic Built-in Speaker	1/1 Built-in Mic Built-in Speaker	1/1 Built-in Mic
Alarm I/O	-	-	1/1	-
Protection	IP67	IP67	IP67	IP67, IK10
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	512 GB micro SD slot	512 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 TR-JB03-G-IN-BK (14) TR-WM03-D-IN (25)  TR-JB07/WM03-G-IN (40)	 TR-JB03-G-IN (16) TR-WM03-D-IN (25)  TR-JB07/WM03-G-IN (40)		

	PROJECT IP CAMERA NDAA	PROJECT IP CAMERA	PROJECT IP CAMERA	PROJECT IP CAMERA
Models	IPC3224SS-ADF28K-I1	PKC2640@Z80-IR-P	IPC3605SB-ADF16KM-IO	IPC3608SB-ADF16KM-IO
	 AI	 LPR	 PANO	 4K PANO
Image Sensor	1/3" 4MP CMOS	1/1.8" 4MP CMOS	1/2.7" 5MP CMOS	1/2.7" 8MP CMOS
Lens	2.8 mm fixed lens	8 - 32 mm motorized lens	1.68 mm fixed lens	1.68 mm fixed lens
Wide Dynamic Range	130 dB true WDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft	- with White LED	66 ft	66 ft
Max. Resolution & Frame Rate	4MP (2688×1520) @ 25 fps	4MP (2688×1520) @ 30 fps	45MP (2880×1620) @ 30 fps	8MP (3840×2160) @ 30 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic	- Built-in Mic	- Built-in Mic
Alarm I/O	1/1	-	-	-
Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Memory Slot	256 GB micro SD slot	128 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories				

	PROJECT IP CAMERA NDA	PROJECT IP CAMERA	PROJECT IP CAMERA	PROJECT IP CAMERA
Models	IPC815SB-ADF14K-I0	IPC86CEB-AF18KC-I0	IPC8544EA-KM-I1	IPC3K28SE-ADF28KMC-DL-I0
	 Fisheye	 4K Fisheye	 PANO	 4K PANO
Image Sensor	1/2.8" 5MP CMOS	1/1.7" 8MP CMOS	1/1.8" 4MP CMOS	1/2.5" 8MP CMOS
Lens	1.4 mm fixed Lens	1.8 mm fixed lens	4× 2.8 mm fixed lens	2× 4.0 mm fixed Lens
Wide Dynamic Range	120 dB true WDR	DWDR	DWDR	130 dB true WDR
Max. IR Distance	33 ft	49 ft	164 ft	98 ft, White LED
Max. Resolution & Frame Rate	5MP (2592×1944) @ 30 fps	12MP (4000×3000) @ 20 fps	4800×2688 @ 30 fps	8MP (5120×1440) @ 20 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic Built-in Speaker	1/1	1/1 Built-in Mic Built-in Speaker
Alarm I/O	1/1	2/1	2/1	1/1
Protection	IP67, IK10	IP67, IK10	IP67	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	512 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	24 V AC / DC 24 V / PoE	12 V DC / PoE
Accessories			  TR-WE45-D-IN (30) TR-JB07-D-IN (32)   TR-UV06-C-IN (32) TR-UP06-IN (18)	

	uniarçh	uniarçh	NETWORK PTZ	NETWORK PTZ
Models	IPC-T124-APF28KLM	IPC-T124-APF28KLM-BK	IPC9312LFW-AF28-2X4-E	IPC6424SR-X25-VF-B
				 Auto-Tracking
Image Sensor	1/3" 4MP CMOS	1/3" 4MP CMOS	1/2.8" 2MP CMOS	1/2.8" 4MP CMOS
Lens	2.8 mm fixed Lens	2.8 mm fixed Lens	2.8 mm	2.8 - 12 mm 4×
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB True WDR	DWDR
Max. IR Distance	98 ft, White LED	98 ft, White LED	33 ft	164 ft w/ LED
Max. Resolution & Frame Rate	4MP (2688×1520) @ 25 fps	4MP (2688×1520) @ 25 fps	2MP (1920×11080) @ 25 fps	4MP (2688×1520) @ 30 fps
Audio I/O	- Built-in Mic Built-in Speaker	- Built-in Mic Built-in Speaker	- Built-in Mic Built-in Speaker	1/1
Alarm I/O	-	-	-	2/1
Protection	IP67	IP67	IP66	IP67, IK10
Memory Slot	128 GB micro SD slot	128 GB micro SD slot	256 GB Micro SD	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE++	12 V DC / PoE+
Accessories	  TR-JB03-G-IN (16) TR-WM03-D-IN (25)   TR-JB03-G-IN (14) TR-WM03-D-IN (25)   TR-JB07/MM03-G-IN (40)			

Bracket/Power included

	NETWORK PTZ	NETWORK PTZ	NETWORK PTZ	NETWORK PTZ
Models	IPC6624SR-X33-VF	IPC6325LFW-AX5C-VG NEW	IPC6315LFW-AX5C-VG1 NEW	IPC94144SFW-X25-F40C
	 Auto-Tracking	 Active Deterrence Auto-Tracking RB AI	 Active Deterrence Auto-Tracking RB AI	 PANO
Image Sensor	1/2.8" 4MP CMOS	1/2.7" 5MP CMOS	1/2.7" 5MP CMOS	1/1.8" 4MP CMOS 1/2.7" 4MP CMOS
Lens	4.5 - 148.5 mm focal lens 33x	2.7 - 13.5 mm focal lens 5x	2.8 - 12 mm focal lens 4x	4.0 mm 4.8 - 120 mm 25x
Wide Dynamic Range	120 dB True WDR	120 dB true WDR	120 dB true WDR	120 dB True WDR
Max. IR Distance	492 ft	164 ft	164 ft	98 ft w/ LED 328 ft
Max. Resolution & Frame Rate	4MP (2688×1520) @ 30 fps	5MP (2880×1620) @ 30 fps	5MP (2880×1620) @ 30 fps	4MP (2688×1520) @ 30 fps
Audio I/O	1/1	1/1 Built-in Mic Built-in Speaker	1/1 Built-in Mic Built-in Speaker	1/1 Built-in Speaker
Alarm I/O	2/1	1/1	-	2/1
Protection	IP66	IP66	IP66	IP66
Memory Slot	256 GB micro SD slot	512 GB micro SD slot	256 GB micro SD slot	256 GB Micro SD
Power	24 V AC / DC / PoE+	12 V DC / PoE	12 V DC / PoE+	12 V DC / PoE+
Accessories	 TR-WE45-A-IN (45)  TR-UC08-A-IN (22)	 TR-UP08-A-IN (25)  TR-JB07-D-IN (32)  TR-UP06-C-IN (18)	 TR-UP06-B-IN (14)  TR-JB07-D-IN (32)  TR-UP06-C-IN (18)	 TR-UP06-B-IN (14) Power included

Others		
Model	Description	
	KB1100	• Network Keyboard with LCD screen display • Four-dimensional joystick control • 1x RJ45, 10/100 Mbps • 1x USB2.0 • Connectable to NVR to control NVR menu and PTZ operations
	ED-525B-WB NEW	• Dual-lens video doorbell • Supports mechanical chime and wireless chime • 3 MP + 2 MP dual cameras • Supports dual-band Wi-Fi (2.4 GHz and 5 GHz) and Wi-Fi 6 • Built-in 8 GB eMMC storage
	ED-R1 NEW	• Wireless door chime for ED-525B-WB dual-lens video doorbells
	IPS302030-S NEW	• IP horn speaker

	ADVANCED DIAMOND NVR	ADVANCED DIAMOND NVR
Models	ANR301HS-04-P-S3 NEW	ANR302A-16-16P-S3 NEW
		
	4 CH NVR  	16 CH NVR  
Video Compression	Smart H.265+/H.265/H.264+/H.264	Smart H.265+/H.265/H.264+/H.264
Max. Recording Resolution	12MP	12MP
Recording Rate	12MP @ 30 fps	12MP @ 30 fps
IP Video Input	4 CH	16 CH
Bandwidth In/Out	80 Mbps / 80 Mbps	160 Mbps / 80 Mbps
Display	HDMI, VGA (Independent)	HDMI, VGA (Independent)
Playback	4	16
Audio In/Out	1/1 RCA	1/1 RCA
Alarm In/Out	2/1 (Optional)	4/2
Ethernet	1× RJ-45 10/100 Mbps	1× RJ-45 10/100/1000 Mbps
PoE Ports	4	16
USB	2× USB 2.0	1× USB 2.0
Storage	1× 20 TB	2× 20 TB
Power	53 V DC	100 ~ 240 V AC
Video Analytics	 	 

ADVANCED DIAMOND




	ADVANCED DIAMOND IP CAMERA	ADVANCED DIAMOND IP CAMERA	ADVANCED DIAMOND IP CAMERA	ADVANCED DIAMOND IP CAMERA
Models	ANC3I349TM-ASNP-28 NEW	ANC2I369T-IRAPV NEW	ANC2I389T-IRAPV NEW	ANC3IV389T-IRS-PRO-28 NEW
				
	 		 	  
Image Sensor	1/1.8" 4MP CMOS	1/2.8" 6MP CMOS	1/2.8" 8MP CMOS	1/1.8" 8MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed Lens	2.8 mm fixed Lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	DWDR	DWDR	120 dB true WDR
Max. IR Distance	98 ft, White LED	98 ft, White LED	98 ft, White LED	-
Max. Resolution & Frame Rate	4MP (2688×1520) @ 20 fps	6MP (3200×1800) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps
Audio I/O	- 	- 	- 	
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Memory Slot	256 GB micro SD slot	-	-	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 PFA130-E (19)	 PFA130-E (19)	 PFA130-E (19)	 PFA130-E (19)

AI-ISP




AI-ISP Camera

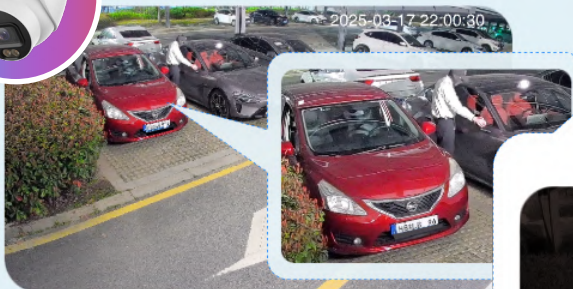

- Accurate and Clear Details
- More Realistic Color Images
- Less Motion Blur

General Camera

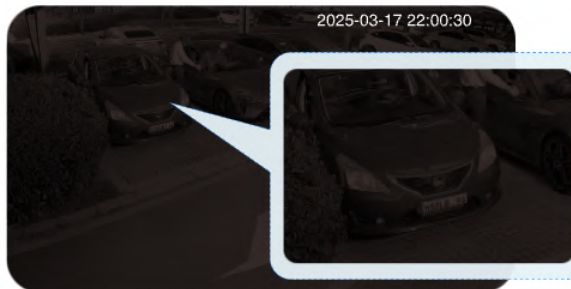

[4K] Brilliant Nights, Clear Details



Combined with high resolution, WizColor ensures that all elements remain sharp and well-defined when enlarged, preserving fine details while enhancing both visual quality and viewer engagement.

High-Performance AI-ISP Chip





- **40% increase** in efficiency in visual model processing
- **30% reduction** in power consumption

Deep Image Processing Algorithm

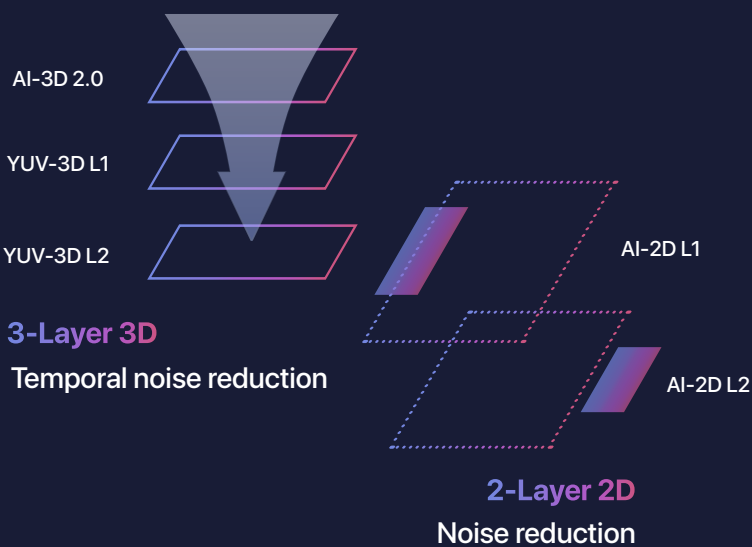

Precise motion detection
Detail restoration increased by **50%**
Motion blur decreased by **80%**

Billion Level Model Training

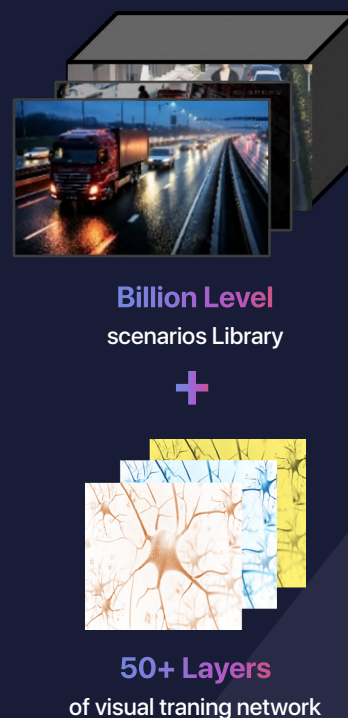

30+ Categories of
extreme scenario
algorithms


	VALUE NVR	VALUE NVR	VALUE NVR	VALUE NVR
Models	NVR301HC-04/P-4KS2/L	NVR301HS-08-8P-EI	NVR302A-08/8P-4KS2/L	NVR302A-16-4KS2/L
	 4 CH NVR 4K	 8 CH NVR AI 4K	 8 CH NVR 4K	 16 CH NVR 4K
Video Compression	Smart H.265+ / Smart H.264+	Smart H.265+ / Smart H.264+	Smart H.265+ / Smart H.264+	Smart H.265+ / Smart H.264+
Max. Recording Resolution	8MP	16MP	8MP	8MP
Recording Rate	8MP @ 30 fps	16MP @ 30 fps	8MP @ 30 fps	8MP @ 30 fps
IP Video Input	4 CH	8 CH	8 CH	16 CH
Bandwidth In/Out	80 Mbps / 60 Mbps	256 Mbps / 256 Mbps	160 Mbps / 64 Mbps	160 Mbps / 64 Mbps
Display	HDMI / VGA	HDMI, VGA (Independent)	HDMI / VGA	HDMI / VGA
Playback	4 CH	8 CH	8 CH	16 CH
Audio In/Out	1/1	1/1 RCA	1/1	1/1
Alarm In/Out	-	-	4/2	4/2
Ethernet	1× RJ-45 10/100 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps
PoE Ports	4	8	8	-
USB	2× USB 2.0	2× USB 2.0	2× USB 2.0	2× USB 2.0
Storage	1× 10 TB	1× 16 TB	2× 10 TB	2× 10 TB
Power	48 V DC	53 V DC	100 ~ 240 V AC	12 V DC
Video Analytics	VCA	VCA Face Recognition	VCA	VCA
	I I			

	VALUE NVR	VALUE NVR	PRO NVR	PRO NVR
Models	NVR302A-16/16P-4KS2/L	NVR304L-32-EI	NVR502A-16-16P-EI	NVR502A-16/16P-I
	 16 CH NVR 4K	 32 CH NVR AI 4K	 16 CH NVR AI 4K	 16 CH NVR AI 4K
Video Compression	Smart H.265+ / Smart H.264+	Smart H.265+ / Smart H.264+	Smart H.265+ / Smart H.264+	Smart H.265+ / Smart H.264+
Max. Recording Resolution	8MP	16MP	32MP	16MP
Recording Rate	8MP @ 30 fps	16MP @ 30 fps	32MP @ 25 fps	8MP @ 30 fps
IP Video Input	16 CH	32 CH	16 CH	16 CH
Bandwidth In/Out	160 Mbps / 64 Mbps	256 Mbps / 256 Mbps	384 Mbps / 384 Mbps	320 Mbps / 320 Mbps
Display	HDMI / VGA	HDMI, VGA (Independent)	HDMI, VGA (Independent)	HDMI, VGA (Independent)
Playback	16 CH	16 CH	16	16
Audio In/Out	1/1	1/1 RCA	1/1 RCA	1/1 RCA
Alarm In/Out	4/2	16/4	4/2	4/2
Ethernet	1× RJ-45 10/100/1000 Mbps	2× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps
PoE Ports	16	-	16	16
USB	2× USB 2.0	1× USB 2.0, 1× USB 3.0	1× USB 2.0, 1× USB 3.0	1× USB 2.0, 1× USB 3.0
Storage	2× 10 TB	4× 16 TB	2× 16 TB	2× 8 TB
Power	100 ~ 240 V AC	100 ~ 240 V AC	100 ~ 240 V AC	100 ~ 240 V AC
Video Analytics	VCA	VCA Face Recognition	VCA Face Recognition	VCA Face Recognition



2.0
Powered by AI

AcuPick is a true video search engine that can quickly locate the information you need. For a better user experience, AcuPick 2.0 offers advanced features encompassing multiple pre-search, multi-type search, intuitive result viewing, and seamless integration with third-party platforms and cameras. This upgrade affords users more speed, more accuracy, more convenience, and more compatibility in search capabilities.

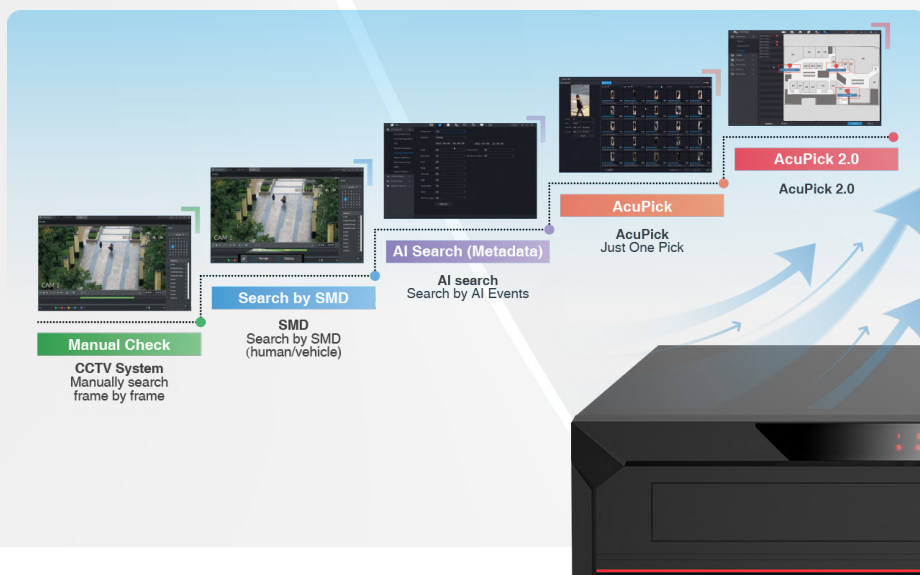

	PRO NVR	PRO NVR	PRO NVR	PROJECT NVR
Models	NVR504L-32-16P-EI	NVR508S-32-EI	NVR508S-64-EI	NVR708S-128-XI
	  32 CH NVR AI 4K	  32 CH NVR AI 4K	  64 CH NVR AI 4K	  128 CH NVR AI 4K
Video Compression	Smart H.265+ / Smart H.264+	Smart H.265+ / Smart H.264+	Smart H.265+ / Smart H.264+	Smart H.265+ / Smart H.264+
Max. Recording Resolution	32MP	32MP	32MP	32MP
Recording Rate	32MP @ 25 fps	32MP @ 25 fps	32MP @ 30 fps	32MP @ 30 fps
IP Video Input	32 CH	32 CH	64 CH	128 CH
Bandwidth In/Out	384 Mbps / 384 Mbps	384 Mbps / 384 Mbps	384 Mbps / 384 Mbps	1024 Mbps / 800 Mbps
Display	HDMI1 / VGA1, HDMI2 / VGA2	HDMI1 / VGA1, HDMI2 / VGA2	HDMI1 / VGA1, HDMI2 / VGA2	HDMI1/VGA1, HDMI2/VGA2, HDMI3, HDMI4
Playback	16	16	16	16
Audio In/Out	1/2 RCA	1/2 RCA	1/2 RCA	1/2 RCA
Alarm In/Out	16/6	16/8	16/8	16/8
Ethernet	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps	2× RJ-45 10/100/1000/2500 Mbps
PoE Ports	16	-	-	-
USB	1× USB 2.0, 1× USB 3.0	2× USB 2.0, 2× USB 3.0	2× USB 2.0, 2× USB 3.0	2× USB 2.0, 2× USB 3.0
Storage	4× 16 TB, 1× eSATA	8× 16 TB, 1× eSATA	8× 16 TB, 1× eSATA	8× 16 TB, 1× eSATA
Power	100 ~ 240 V AC	100 ~ 240 V AC	100 ~ 240 V AC	100 ~ 240 V AC
Video Analytics	VCA Face Recognition	VCA Face Recognition	VCA Face Recognition	VCA Face Recognition

Target Track Query

With AcuPick 2.0, users can review the trajectory of the target they are searching for on the map, enabling them to quickly locate and identify the target in time.

Pre-search by Attributes

Before using AcuPick, it is necessary to locate the target. However, in some scenarios, one may not know the exact time and place where the target appears but only know some attributes of the target. To address this, AcuPick 2.0 now supports pre-search by attributes, which can select attributes according to the known information of the target and search for targets that match the attributes.

Top and bottom type and color, bag, hat, gender and umbrella





Human



Vehicle

Vehicle type, vehicle color, vehicle logo, seatbelt, smoking, and calling

User can upload maps and cameras to its locations



When using AcuPick, a trajectory map of the target can be generated on the map

Newly Supports Animal Search

AcuPick 2.0 supports target searches for humans, vehicles, and animals. Its precise detection and tracking capabilities make it an ideal choice for enhanced security and surveillance, catering to a wide range of applications.

Human Search



Animal Search





Vehicle Search



	VALUE IP CAMERA	VALUE IP CAMERA	VALUE IP CAMERA	VALUE IP CAMERA
Models	HNC3IV149S-IRASPV	HNC3IV141T-IR-ZAS	HNC3IV241E-IRAS/28	HNC3V241F-IRAS-S2/28
	 Full-Color AI	 AI	 AI	
Image Sensor	1/3" 4MP CMOS	1/2.9" 4MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS
Lens	2.8 mm fixed lens	2.7 - 13.5 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft, White LED	197 ft	98 ft	98 ft
Max. Resolution & Frame Rate	4MP (2688×1520) @ 20 fps	4MP (2688×1520) @ 20 fps	4MP (2688×1520) @ 20 fps	4MP (2688×1520) @ 20 fps
Audio I/O	- Built-in Mic	1/1 Built-in Mic	- Built-in Mic	1/1 Built-in Mic
Alarm I/O	-	1/1	-	1/1
Protection	IP67	IP67	IP67, IK10	IP67, IK10
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 PFA130-E (19)  PFA152-E (22)  UJB94-W (13)	 PFA130-E (19)  PFA152-E (22)  UJB120-W (14)	 PFA136 (18)  PFA152-E (22)  PFA151 (32)  PFB203W (21)  PFB220C (38)  UJB120-W (14)	 PFA139 (17)  PFA152-E (22)  PFB204W (21)  PFB220C (38)

	VALUE IP CAMERA	VALUE IP CAMERA	VALUE IP CAMERA	VALUE IP CAMERA
Models	HNC3IV349TM-IRASPV	HNC3IV341T-IR-ZAS	HNC2I369T-IRAPV	HNC3IV189S-IRASPV/28
	 Full-Color AI	 AI	 Full-Color	 Full-Color 4K AI
Image Sensor	1/3" 4MP CMOS	1/2.9" 4MP CMOS	1/2.7" 6MP CMOS	1/2.7" 8MP CMOS
Lens	2.8 mm fixed lens	2.7 - 13.5 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	DWDR	120 dB true WDR
Max. IR Distance	98 ft, White LED	131 ft	98 ft	98 ft, White LED
Max. Resolution & Frame Rate	4MP (2688×1520) @ 20 fps	4MP (2688×1520) @ 30 fps	6MP (3200×1800) @ 20 fps	8MP (3840×2160) @ 20 fps
Audio I/O	- Built-in Mic	- Built-in Mic	- Built-in Mic	- Built-in Mic
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	-	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 PFA137 (18)  PFA152-E (22)	 PFA130-E (19)  PFB203W (21)	 PFA130-E (19)  UJB129-W (15)  PFB220C (38)  UWB129-W (20)	 PFA130-E (19)  PFA152-E (22)

	VALUE IP CAMERA	VALUE IP CAMERA	VALUE IP CAMERA	VALUE IP CAMERA
Models	HNC3IV181T-IR-ZAS	HNC3IV281E-IRAS/28	HNC2I389T-IRAPV	HNC3IV389TM-IRASPV/28
	 4K AI	 4K AI	 Full-Color 4K	 Full-Color 4K AI
Image Sensor	1/2.7" 8MP CMOS	1/2.7" 8MP CMOS	1/2.7" 8MP CMOS	1/2.7" 8MP CMOS
Lens	2.7 - 13.5 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	DWDR	120 dB true WDR
Max. IR Distance	196 ft	98 ft	98 ft	98 ft, White LED
Max. Resolution & Frame Rate	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps
Audio I/O	1/1 Built-in Mic	- Built-in Mic	- Built-in Mic	- Built-in Mic
Alarm I/O	1/1	-	-	-
Protection	IP67	IP67, IK10	IP67	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	-	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 PFA130-E (19)  UJB120-W (14)	 PFA136 (18)  PFA152-E (22)	 PFA130-E (19)  PFB220C (38)	 PFA130-E (19)  UJB129-W (15)  PFB203W (21)  UWB129-W (20)


	VALUE IP CAMERA	VALUE IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	HNCB3IV389TM-IRASPV-28	HNC3IV381T-IR-ZAS	HNC3I149E-ASN1/28	HNC3I149T1-IRASPV/28-S5
	 Full-Color 4K AI	 4K AI	 Full-Color AI	 Full-Color Active Deterrence RB AI
Image Sensor	1/2.7" 8MP CMOS	1/2.7" 8MP CMOS	1/2.7" 4MP CMOS	1/2.7" 4MP CMOS
Lens	2.8 mm fixed lens	2.7 - 13.5 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft, White LED	131 ft	98 ft, White LED	98 ft, White LED
Max. Resolution & Frame Rate	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps
Audio I/O	- Built-in Mic	- Built-in Mic	1/1 Built-in Mic	1/1 Built-in Mic
Alarm I/O	-	-	1/1	1/1
Protection	IP67	IP67	IP67	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 PFA137-B (17) PFB203W-B (21)	 PFA130-E (19) PFA152-E (22) PFB220C (38)	 PFA152-E (22) UJB94-W (13)	 PFA130-E (19) PFA152-E (22)

	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	HNC3I141T-IRASM1/21	HNC3I149T1-IR-ZASPV-S5	HNC3I241R-IRASM1/21	HNC3I349TM-ASN1/28
	 PANO AI	 Full-Color Active Deterrence RB AI	 PANO AI	 Full-Color AI
Image Sensor	1/2.8" 4MP CMOS	1/2.8" 4MP CMOS	1/2.8" 4MP CMOS	1/2.7" 4MP CMOS
Lens	2.1 mm fixed lens	2.7 - 13.5 mm motorized lens	2.1 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	49 ft	164 ft, White LED	49 ft	66 ft, White LED
Max. Resolution & Frame Rate	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic Built-in Speaker	1/1 Built-in Mic	- Built-in Mic
Alarm I/O	1/1	1/1	1/1	-
Protection	IP67	IP67	IP67, IK10	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 PFA130-E (19) PFA152-E (22)	 PFA130-E (19)	 PFA137 (18) PFB203W (21) PFA152-E (22) PFB220C (38)	 PFA130-E (19) PFB203W (21) PFA152-E (22) UJB129-W (15) UWB129-W (20)

	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	HNC3I349H-IRASPV/28-S5	HNC3I349TM-ASNP-28	HNC3I189T1-IRASPV/28-S5	HNC3I189T1-IR-ZASPV-S5
	 		 	 
	   		    	    
Image Sensor	1/2.7" 4MP CMOS	1/1.8" 4MP CMOS	1/2.8" 8MP CMOS	1/2.8" 8MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens	2.7 - 13.5 mm motorized lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft, White LED	98 ft, White LED	98 ft, White LED	164 ft, White LED
Max. Resolution & Frame Rate	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps	8MP (3840×2160) @ 30 fps	8MP (3840×2160) @ 30 fps
Audio I/O	1/1  	- 	1/1  	1/1 
Alarm I/O	1/1	-	1/1	1/1
Protection	IP67	IP67	IP67	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	    		   	 

	PRO IP CAMERA	PROJECT IP CAMERA	PROJECT IP CAMERA	PROJECT IP CAMERA
Models	HNC3I389H-IRASPV/28-S5	HNC5I242R-IRASE-28-S3	HNC5I342TM-IRASE-28-S3	HNC5I382TM-IRASE-28-S3
	 		 	 
	    	 	 	  
Image Sensor	1/2.7" 8MP CMOS	1/1.8" 4MP CMOS	1/1.8" 4MP CMOS	1/1.8" 8MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	140 dB True WDR	140 dB True WDR	120 dB True WDR
Max. IR Distance	98 ft, White LED	164 ft	164 ft	164 ft
Max. Resolution & Frame Rate	8MP (3840×2160) @ 30 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps	8MP (3840×2160) @ 30 fps
Audio I/O	1/1  	1/1 	1/1 	1/1 
Alarm I/O	1/1	1/1	1/1	1/1
Protection	IP67	IP67, IK10	IP67	IP67
Memory Slot	256 GB micro SD slot	512 GB micro SD slot	512 GB micro SD slot	512 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	    		  	  

	PROJECT IP CAMERA	PROJECT IP CAMERA	PROJECT IP CAMERA	PROJECT IP CAMERA
Models	HNC7I4120-IRAS-S2	HNC3I889-M1PV-28-E2	HNC7I782-IRM1/28-S2	HNC7I7201-IRM2-Z-S2
	 Fisheye 4K AI	 Full-Color PANO RB AI	 PANO AI	 AI
Image Sensor	1/1.7" 12MP CMOS	1/2.7" 2× 4MP CMOS	1/1.8" 4× 4MP CMOS	1/2.7" 4× 5MP CMOS
Lens	1.85 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 - 12 mm motorized lens
Wide Dynamic Range	DWDR	120 dB True WDR	DWDR	DWDR
Max. IR Distance	33 ft	82 ft, White LED & IR LED	98 ft w/ IR LED	98 ft w/ IR LED
Max. Resolution & Frame Rate	12MP (4000×3000) @ 25 fps	4096×1860 @ 20 fps	5520×2700 @ 30 fps	2592×1944 @ 30 fps
Audio I/O	1/1 Built-in Mic Built-in Speaker	1/1 Built-in Mic Built-in Speaker	1/1	1/1
Alarm I/O	2/2	1/1	2/2	3/2
Protection	IP67, IK10	IP67	IP67, IK10	IP67, IK10
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / 24 V AC / PoE+	12 V DC / PoE+
Accessories	 PFB300C (32) PFA100 (16)	 PFA137 (18) PFB205W-E (18)	 PFA120-SG (39) PFA150-SG (59)	 PFB303W (25) PFB300C (32)
			I	I

	PROJECT IP CAMERA	PROJECT IP CAMERA	PROJECT IP CAMERA	PROJECT IP CAMERA
Models	HNC3I141-T/3-S2	HNC3I341-T/2-S2	LPR413-IRASPV4-0832	IPC-HDBW5241FN-M12
	 Thermal Smoke Fire AI	 Thermal Smoke Fire AI	 Full-Color Active Deterrence LPR	 FD
Image Sensor	1/2.7" 4MP	1/2.7" 4MP	1/1.8" 4MP CMOS	1/2.8" 2MP CMOS
Lens	3.5 mm fixed lens	2 mm fixed lens	8 - 32 mm motorized lens	2.8 mm fixed lens
Wide Dynamic Range	DWDR	DWDR	140 dB True WDR	120 dB true WDR
Max. IR Distance	98 ft	-	198 ft, White LED	98 ft
Max. Resolution & Frame Rate	4MP(2336×1752)(256×192)@30 fps	4MP(2336×1752)(1280×960)@30 fps	4MP (2688×1520) @ 25 fps	2MP (1920×1080) @ 30 fps
Audio I/O	1/1	1/1	-/1 Built-in Mic Built-in Speaker	- Built-in Mic
Alarm I/O	1/1	1/1	2/2	-
Protection	IP67	IP67	IP67, IK10	IP67, IK10
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	PoE
Accessories		 PFA130-E (19) PFB203W (21) PFA106 (20) PFB220C (38)	 PFA150 (34)	 PFA139 (17) PFB204W (21) PFA152-E (22) RC978 (6.5) MLCDF7-E (165)
				I

	PROJECT IP CAMERA	NETWORK PT	NETWORK PTZ	NETWORK PTZ
Models	IPC-EB5541-M12-SA	HNC5230PT	PDN6CEI445H-GR	PDN4EI425H-GB-APV-TP180
	 Fisheye		 Auto-TrackingPPFDAI	 Full-ColorAuto-TrackingADFDRB
Image Sensor	1/2.7" 5MP CMOS	1/3" 3MP CMOS	1/2.8" 4MP CMOS	2× 1/2.8" 4MP CMOS
Lens	1.4 mm fixed lens	3.6 mm fixed lens	3.95 - 177.75 mm focal lens 45×	2.8 mm PANO5 - 125 mm 25×
Wide Dynamic Range	120 dB true WDR	DWDR	120 dB True WDR	120 dB True WDR
Max. IR Distance	-	-	820 ft	98 ft w/ LED328 ft
Max. Resolution & Frame Rate	5MP (2592×1944) @ 30 fps	3MP (2048×1536) @ 30 fps	4MP (2560×1440) @ 30 fps	4MP (2560×1440) @ 30 fps
Audio I/O	- Built-In Mic	- Built-In MicBuilt-In Speaker	1/1	1/1
Alarm I/O	-	-	7/2	2/1
Protection	IP67, IK10	IP66, IK10	IP67, IK10	IP66
Memory Slot	256 GB micro SD slot	64 GB micro SD slot	512 GB micro SD slot	512 GB micro SD slot
Power	PoE	12 V DC / PoE	24 V DC / PoE+	12 V DC / PoE
Accessories	 PFA139 (17)  PFA152-E (22)  MLCDF7-E (165)  PFB204W (21)  RC978 (6.5)	 PFA123 (10)  PFA152-E (22)  UJB129-W (20)  PFB203W (21)  UJB129-W (15)	 PFA120 (24)  PFA151 (32)  PFB303S (144)  PFA150 (34)  PFA111 (16)  PFB300C (32)	 PFA150 (34)  PFA151 (32)  PFB303S (144)  PFA151 (32)  PFA111 (16)  PFB300C (32)

	NETWORK PTZ	NETWORK PTZ
Models	PDN4EI425H-GR-APV	PDN4EI825H-GR-APV
	 Active Deterrence Auto-Tracking PP FD AI	 Active Deterrence Auto-Tracking 4K PP FD AI
Image Sensor	1/2.8" 4MP CMOS	1/2.8" 8MP CMOS
Lens	5 - 125 mm focal lens 25×	5 - 125 mm focal lens 25×
Wide Dynamic Range	120 dB True WDR	120 dB True WDR
Max. IR Distance	328 ft	328 ft
Max. Resolution & Frame Rate	4MP (2560×1440) @ 30 fps	8MP (3840×2160) @ 30 fps
Audio I/O	1/1	1/1
Alarm I/O	2/1	2/1
Protection	IP66	IP66
Memory Slot	512 GB micro SD slot	512 GB micro SD slot
Power	12 V DC	12 V DC
Accessories	 PFA6400S (139)  PFA151 (32)  PFB303S (144)	 PFA150 (34)  PFA111 (16)  PFB300C (32)

Expand Views, Captured Details

Panoramic Image & Detail In One View

The Panoramic channel presents up to 180° ultra-wide view. It allows security teams to continue monitoring large areas with no interruptions, while PTZ cameras simultaneously zoom, tilt, or pan to monitor specific security events that occur.





VIDEO INTERCOM

Easy to Install, Easy to Use

DIAMOND SERIES

Video Intercom		
	Model	Description



EVAK01X

- 2-wire kit
- Wi-Fi Hybrid Indoor Monitor with 7" TFT capacitive touch screen
- 6-ch alarm input and 1-channel alarm output
- Hybrid Villa Door Station, IP65 and IK07



IPC-WDS-S2

- Indoor Doorbell Chime
- Built-in speaker
- Multiple ringtone options
- Compatible with IPC-DB6I-BLACK-USA WiFi Video Doorbells
- Snooze Alert



IPC-DB6I-BLACK-USA

- 5MP 1/2.7" CMOS image sensor,
- 2.4 GHz and 5 GHz Dual-Band WIFI connection
- H.264/H.265 codec, high compression rate, ultra-low bit rate
- Built-in Microphone and Speaker for Real-time Communication
- 12 ~ 24 V DC / 16 ~ 24 V AC, 0.8 A, 5 V DC±5%, 2 A (USB)
- IP65

Thermal Terminal			
	Model	Description	Accessory



HTK721YT1

- Support unlock through face, ID/IC card, and password
- High speed, face verification accuracy up to 99%
- Facial recognition distance from 1 ft ~ 6.5 ft (0.3 m ~ 2.0 m)
- Facial comparison speed up to 0.5s per person
- Temperature monitoring error is ≤ 0.9°F
- Face mask detection support



HTKA172YT1 (219)




	VALUE DVR	VALUE DVR	VALUE DVR	VALUE DVR
Models	XVR501H-04-I3-V2	XVR501H-08-I3-V2	XVR501H-16-I3	XVR502AN-32-I3-V2
	 4 CH DVR AI	 8 CH DVR AI	 16 CH DVR AI	 32 CH DVR AI
Video Compression	Smart H.265+ / Smart H.264+	Smart H.265+ / Smart H.264+	AI Coding / H.265+ / H.265 / H.264	Smart H.265+ / Smart H.264+
Video Format	HDCVI / AHD / TVI / CVBS / IP	HDCVI / AHD / TVI / CVBS / IP	HDTVI / HDCVI / AHD / 960H / IP	HDCVI / AHD / TVI / CVBS / IP
Max. BNC Recording Rate	5M-N @ 10 fps	5M-N @ 12 fps	5M-N @ 10 fps	5M-N @ 12 fps
Max. BNC Resolution	5MP	5MP	5MP	5MP
BNC Video Input	4 CH	8 CH	16 CH	32 CH
Bandwidth In/Out	32 Mbps / 32 Mbps	64 Mbps / 64 Mbps	128 Mbps	128 Mbps / 128 Mbps
Display	HDMI / VGA	HDMI / VGA	HDMI / VGA	HDMI, VGA (Independent)
Playback	4 CH	1/4/9	16 CH	16 CH
Audio In/Out	1/1 RCA	1/1 RCA	1/1, 2-way audio	1/1 RCA
Alarm In/Out	-	-	-	-
Ethernet Port	1× RJ-45 10/100 Mbps	1× RJ-45 10/100 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps
USB	2× USB 2.0	2× USB 2.0	1× USB 2.0, 1× USB 3.0	1× USB 2.0, 1× USB 3.0
Storage	1× 16 TB	1× 16 TB	1× 16 TB	2× 16 TB
Power	12 V DC	12 V DC	12 V DC / 2 A	12 V DC
Video Analytics	VCA Face Recognition	VCA Face Recognition	VCA Face Recognition	VCA Face Recognition
	I	I		I

	PRO DVR	PRO DVR	PRO DVR
Models	XVR501H-08-4KL-I3-V2	XVR501H-16-4KL-I3-V2	XVR504L-32-4KL-I3
	 8 CH DVR 4K AI	 16 CH DVR 4K AI	 32 CH DVR 4K AI
Video Compression	Smart H.265+ / Smart H.264+	Smart H.265+ / Smart H.264+	AI Coding / H.265+ / H.265 / H.264
Video Format	HDCVI / AHD / TVI / CVBS / IP	HDCVI / AHD / TVI / CVBS / IP	HDTVI / HDCVI / AHD / 960H / IP
Max. BNC Recording Rate	8MP @ 7 fps	8MP @ 7 fps	8MP @ 7 fps
Max. BNC Resolution	8MP	8MP	8MP
BNC Video Input	8 CH	16 CH	32 CH
Bandwidth In/Out	128 Mbps / 128 Mbps	128 Mbps / 128 Mbps	128 Mbps
Display	HDMI, VGA (Independent)	HDMI, VGA (Independent)	HDMI1 / VGA, HDMI2
Playback	1/4/9	1/4/9/16	1/4/9/16
Audio In/Out	1/1 RCA	1/1 RCA	4/1, 2-way audio
Alarm In/Out	-	-	16/6
Ethernet Port	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps
USB	1× USB 2.0, 1× USB 3.0	1× USB 2.0, 1× USB 3.0	1× USB 2.0, 2× USB 3.0
Storage	1×16 TB	1× 16 TB	4× 10 TB
Power	12 V DC	12 V DC	100 ~ 240 V AC
Video Analytics	VCA Face Recognition	VCA Face Recognition	VCA Face Recognition
	I	I	I

	VALUE HD CAMERA	VALUE HD CAMERA	VALUE HD CAMERA	VALUE HD CAMERA
Models	HCC31120U-IRAPV-28	HCC31320U-IRAPV-28	HCC3320M-IR/28-V2	HCCB3320M-IR/28-V2
	 Full-Color	 Full-Color		
Image Sensor	2MP CMOS	2MP CMOS	1/2.9" 2MP CMOS	1/2.9" 2MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	DWDR	DWDR	DWDR	DWDR
Max. IR Distance	98 ft, White LED	98 ft, White LED	98 ft	98 ft
Video Output	CVI, TVI, AHD, 960H	CVI, TVI, AHD, 960H	CVI, TVI, AHD, 960H	CVI, TVI, AHD, 960H
Max. Resolution & Frame Rate	2MP (1920×1080) @ 30 fps	2MP (1920×1080) @ 30 fps	2MP (1920×1080) @ 30 fps	2MP (1920×1080) @ 30 fps
Audio I/O	- Built-in Mic	1/- Built-in Mic	-	-
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Power	12 V DC	12 V DC	12 V DC	12 V DC
Accessories			 PFA13A-E (12)  PFB204W (21)  PFA152-E (22)  PFB220C (38)  UJB94-W (13)	 PFA13A-B (9)  UJB94-G (13)  PFA152-E (22)  PFB220C (38)  PFB204W (21)

	VALUE HD CAMERA	VALUE HD CAMERA	VALUE HD CAMERA	VALUE HD CAMERA
Models	HCC3320TMQ-IR/28	HCC3320T-IR-Z	HCC3250E-IR/28	HCCB3250R-IR-Z
				
Image Sensor	1/2.7" 2MP CMOS	1/2.7" 2MP CMOS	1/2.7" 5MP CMOS	1/2.7" 5MP CMOS
Lens	2.8 mm fixed lens	2.7 - 12 mm fixed lens	2.8 mm fixed lens	2.7 - 12 mm motorized lens
Wide Dynamic Range	DWDR	DWDR	DWDR	DWDR
Max. IR Distance	164 ft	197 ft	98 ft	98 ft
Video Output	CVI, TVI, AHD, 960H	CVI, TVI, AHD, 960H	CVI, TVI, AHD, 960H	CVI, TVI, AHD, 960H
Max. Resolution & Frame Rate	2MP (1920×1080) @ 30 fps	2MP (1920×1080) @ 30 fps	5MP (2592×1944) @ 20 fps	5MP (2592×1944) @ 20 fps
Audio I/O	-	-	-	-
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP67, IK10
Power	12 V DC	12 V DC	12 V DC	12 V DC
Accessories	 PFA137 (18)  PFB203W (21)  PFA152-E (22)  PFB220C (38)  UJB129-W (15)  UWB129-W (20)	 PFA137 (18)  PFB203W (21)  PFA152-E (22)  PFB220C (38)  UJB129-W (15)  UWB129-W (20)	 PFA137 (18)  PFB203W (21)  PFA152-E (22)  PFB220C (38)  UJB120-W (14)	 PFA137 (18)  PFB203W (21)  PFA152-E (22)  PFB200C (25)  UJB129-W (15)  UWB129-W (20)

	VALUE HD CAMERA	VALUE HD CAMERA	VALUE HD CAMERA	PRO HD CAMERA
Models	HCC3I350U-IRAPV-28	HCC3281EA-IRA-28-S2	HCC3381T-IR-ZA-S2	HCC3I181TLM-IRAPV-28
	 Full-Color	 4K	 4K	 Full-Color 4K
Image Sensor	5MP CMOS	1/2.7" 8MP CMOS	1/2.7" 8MP CMOS	8MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.7 - 13.5 mm motorized lens	2.8 mm fixed lens
Wide Dynamic Range	DWDR	120 dB true WDR	120 dB true WDR	120 dB True WDR
Max. IR Distance	98 ft, White LED	98 ft	196 ft	131 ft, White LED
Video Output	CVI, TVI, AHD, 960H	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H
Max. Resolution & Frame Rate	5MP (2880×1620) @ 25 fps	8MP (3840×2160) @ 15 fps	8MP (3840×2160) @ 15 fps	8MP (3840×2160) @ 15 fps
Audio I/O	1/- Built-in Mic	- Built-in Mic	1/- Built-in Mic	- Built-in Mic
Alarm I/O	-	-	-	-
Protection	IP67	IP67, IK10	IP67	IP67
Power	12 V DC	12 V DC	12 V DC	12 V DC
Accessories		 PFA136 (18) PFB203W (21)  PFA106 (20) PFB220C (38)	 PFA130-E (19) PFB203W (21)  PFA152-E (22) PFB220C (38)  UJB129-W (15) UWB129-W (20)	 PFA130-E (19) PFA152-E (22)  UJB94-W (13)

	PRO HD CAMERA	PRO HD CAMERA	PRO HD CAMERA	PRO HD CAMERA
Models	HCC3I381T-IRAPV-28	HCC3I389H-IRAPV-S2-28	HCC7761-IRM1	HCC5451
	 Full-Color 4K	 Full-Color Active Deterrence 4K RB	 PANO 4K	 Fisheye
Image Sensor	8MP CMOS	8MP CMOS	1/2.8" 3× 2MP CMOS	1/2.8" 5MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	3.6 mm fixed lens	1.4 mm fixed lens
Wide Dynamic Range	120 dB True WDR	120 dB True WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	131 ft, White LED	131 ft, White LED	65 ft	33 ft
Video Output	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H
Max. Resolution & Frame Rate	8MP (3840×2160) @ 15 fps	8MP (3840×2160) @ 15 fps	8MP (3840×2160) @ 15 fps	5MP (2592×1944) @ 20 fps
Audio I/O	- Built-in Mic	- Built-in Mic	1/- Built-in Mic	- Built-in Mic
Alarm I/O	-	-	2/1	-
Protection	IP67	IP67	IP67, IK10	-
Power	12 V DC	12 V DC	12 V DC	12 V DC
Accessories	 PFA130-E (19) PFB204W (21)  PFA152-E (22) UJB120-W (14)  UWB120-W (9)	 PFA130-E (19) PFB203W (21)  PFA152-E (22) UJB129-W (15)  UWB129-W (20)	 PFA150 (34) PFA151 (32)	 PFA136 (18) PFB203W (21)  PFA152-E (22) UJB129-W (15)  UWB129-W (20)


	PRO HD CAMERA	HD PTZ
Models	HCC7482-IR	PDC42D216H
	 	
Image Sensor	1/1.8" 8MP CMOS	1/2.8" 2MP CMOS
Lens	2.5 mm fixed lens	5 - 80 mm focal lens 
Wide Dynamic Range	120 dB true WDR	120 dB True WDR
Max. IR Distance	49 ft	328 ft
Video Output	CVI, 960H	TVI, AHD, CVI, 960H
Max. Resolution & Frame Rate	8MP (3840×2160) @ 15 fps	2MP (1920×1080) @ 30 fps
Audio I/O	- 	1/-
Alarm I/O	2/1	2/1
Protection	IP67, IK10	IP66, IK10
Power	12 V DC	12 V DC
Accessories	 PFA150 (34)  PFB302S (48)  UJB155-W (15)	 PFA151 (32)  PFB300C (32)  UWB155-W (20)
		 PFA120 (24)  PFA150 (34)  PFB303S (144)



SMART INTERACTIVE WHITEBOARD

- Smart Whiteboard Technology uses multiple different features such as Wireless Projection, Intelligent Whiteboard, Video conferencing, and file management to become an "All-In-One" solution for various applications.
- Interactive whiteboards, regardless of the application, allow for an effective platform for presentations, demonstrations, meeting hosting, and documentation storage.

 Wireless Projection
  Video Conference Compatibility
  Intelligent Whiteboard
  File Management
  Information Security

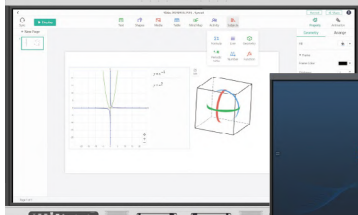


Smart Interactive Whiteboard		
Model	Description	
	EN-SIW-T65X 65" 4K touchscreen with 48MP built-in camera - Wireless screen sharing from multiple devices - Ultra-smooth writing experience with handwriting recognition - Quick file sharing by scanning a QR code - Optional OPS module, dual-system switchable	 EN-SIW-MS0A (308) 65" Mobile Stand
	EN-SIW-T86X 86" 4K touchscreen with 48MP built-in camera - Wireless screen sharing from multiple devices - Ultra-smooth writing experience with handwriting recognition - Quick file sharing by scanning a QR code - Optional OPS module, dual-system switchable	 EN-SIW-MS1C (696) 65"/75"/86" Mobile Stand
	EN-SIW-T65C 65" 4K touchscreen with 8MP built-in camera - Mobile & PC multi-terminal 4K wireless projection - Support smart applications - Various humanized applications - USB interface pluggable wireless module	 EN-SIW-MS0A (308) 65" Mobile Stand
	EN-SIW-OPSI5A 6th generation Intel® Core™ i5 and Celeron® processors - Intel® HD Graphics 530 GPU, supports H.265 and 4K - MSATA system disk quick start, one-key restore 3× USB 3.0 and 3× USB 2.0 interfaces - Support dual antenna 802.11a/b/g/n/ac Wi-Fi - Support 1× HDMI and 1× DP interfaces	

INTELLIGENCE & CONVERGENCE AT THE FOREFRONT



	VALUE LINE NVR	VALUE LINE NVR	VALUE LINE NVR	PRO NVR
Models	SN3104/4PS-K	SN3208/8PS-K	SN3216/16PS-K	SN4416/16P-M
				
	4 CH NVR  	8 CH NVR  	16 CH NVR  	16 CH NVR 
Video Compression	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Max. Recording Resolution	12MP	12MP	12MP	32MP
Recording Rate	1 CH 12MP @ 30 fps	1 CH 12MP @ 30 fps	1 CH 12MP @ 30 fps	8 CH 8MP @ 25 fps
IP Video Input	4 CH	8 CH	16 CH	16 CH
Bandwidth In/Out	40 Mbps / 80 Mbps	80 Mbps / 160 Mbps	160 Mbps / 160 Mbps	256 Mbps / 256 Mbps
Display	HDMI / VGA	HDMI, VGA (Independent)	HDMI, VGA (Independent)	HDMI1 / VGA, HDMI2
Playback	4	8	16	16
Audio In/Out	1/1 RCA	1/1 RCA	1/1 RCA	1/1 RCA
Alarm In/Out	-	4/1	4/1	16/9
Ethernet	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100 Mbps
PoE Ports	4	8	16	16
USB	1× USB 2.0, 1× USB 3.0	2× USB 2.0	2× USB 2.0	2× USB 2.0, 1× USB 3.0
Storage	1× 10 TB	2× 10 TB	2× 10 TB	4× 14 TB, 1× eSATA
Power	48 V DC	48 V DC	100 ~ 240 V AC	100 ~ 240 V AC
Video Analytics	 	 	 	

	PRO NVR	PROJECT NVR	PROJECT NVR	PROJECT NVR
Models	SN4432/16P-M	SN7832R-M	SN7864R-M	SN7A128R-M
				
	32 CH NVR  	32 CH NVR 	64 CH NVR 	128 CH NVR 
Video Compression	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264	H.265+ / H.265 / H.264+ / H.264
Max. Recording Resolution	32MP	32MP	32MP	32MP
Recording Rate	8 CH 8MP @ 25 fps	8 CH 8MP @ 30 fps	8 CH 8MP @ 30 fps	8 CH 8MP @ 30 fps
IP Video Input	32 CH	32 CH	64 CH	128 CH
Bandwidth In/Out	320 Mbps / 400 Mbps	320 Mbps / 400 Mbps	400 Mbps / 400 Mbps	400 Mbps / 400 Mbps
Display	HDMI1 / VGA, HDMI2	HDMI1 / VGA1, HDMI2 / VGA2	HDMI1 / VGA1, HDMI2 / VGA2	HDMI1 / VGA1, HDMI2 / VGA2
Playback	16	16	16	16
Audio In/Out	1/1 RCA	1/2 RCA	1/2 RCA	1/2 RCA
Alarm In/Out	16/9	16/9	16/9	16/9
Ethernet	1× RJ-45 10/100/1000 Mbps	2× RJ-45 10/100/1000 Mbps	2× RJ-45 10/100/1000 Mbps	2× RJ-45 10/100/1000 Mbps
PoE Ports	16	-	-	-
USB	2× USB 2.0, 1× USB 3.0	2× USB 2.0, 2× USB 3.0	2× USB 2.0, 2× USB 3.0	2× USB 2.0, 2× USB 3.0
Storage	4× 14 TB, 1× eSATA	8× 14 TB, 1× eSATA	8× 14 TB, 1× eSATA	8× 14 TB, 1× eSATA
Power	100 ~ 240 V AC	100 ~ 240 V AC	100 ~ 240 V AC	100 ~ 240 V AC
Video Analytics				

	VALUE IP CAMERA	VALUE IP CAMERA	VALUE IP CAMERA	VALUE IP CAMERA
Models	SIP34B5/MZ-C1	SIP34T3M/28-C	SIP34T3M/28-CL	SIP38D3/28-C
			 	 
Image Sensor	1/3" 4MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS	1/2.8" 8MP CMOS
Lens	2.8 -12 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB True WDR	120 dB true WDR	120 dB True WDR	120 dB True WDR
Max. IR Distance	164 ft	98 ft	98 ft, White LED	98 ft
Max. Resolution & Frame Rate	4MP (2560×1440) @ 20 fps	4MP (2688×1520) @ 20 fps	4MP (2560×1440) @ 20 fps	8MP (3840×2160) @ 15 fps
Audio I/O	-	- 	- 	- 
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP67, IK10
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)  ES1280ZJ-S (21)  UJB120-W (14)	 ES1273ZJ-130-TRL (25)  ES1280ZJ-DM8 (16.5)  UJB129-W (15)  UWB129-W (20)	 ES1273ZJ-130-TRL (25)  ES1280ZJ-DM8 (16.5)  ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)	 ES1280ZJ-DM46 (16)  ES1272ZJ-120 (20)  UJB120-W (14)  UWB120-W (9)


	VALUE IP CAMERA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	SIP38T3M-28-CLJ	SIP44B6VB/28-S	SIP44B6V/MZ28120-H	SIP44D4V/MZ28120-H
	 Full-Color 4K	 Active Deterrence AI	 FD AI	 FD AI
Image Sensor	1/2.7" 8MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 - 12 mm motorized lens	2.8 - 12 mm motorized lens
Wide Dynamic Range	120 dB true WDR	120 dB True WDR	120 dB true WDR	120 dB true WDR
Max. IR Distance	98 ft, White LED	196 ft, White LED	197 ft	131 ft
Max. Resolution & Frame Rate	8MP (3840×2160) @ 15 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps
Audio I/O	- Built-in Mic	1/1 Built-in Mic Built-in Speaker	1/1	1/1
Alarm I/O	-	1/1	1/1	1/1
Protection	IP67	IP67	IP67	IP67, IK10
Memory Slot	512 GB micro SD slot	512 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 ES1273ZJ-130-TRL (25) ES1280ZJ-DM8 (16.5)	 ES1275ZJ-SUS (29) ES1276ZJ-SUS (31)  ES1260ZJ (14) UJB120-W (14)	 ES1275ZJ-SUS (29) ES1276ZJ-SUS (31)  UJB120-W (14) ES1280ZJ-S (21)	 ES1280ZJ-DM55 (20) ES1473ZJ-155 (34)  UJB155-W (15) UWB155-W (20)

	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	SIP44T3M/28-H	SIP44T3M/28PAD-DX	SIP44T3AMBUIV/28-S	SIP44T3M/28-DX
	 FD AI	 AI-ISP Active Deterrence AI RB	 Active Deterrence AI	 AI-ISP FD AI
Image Sensor	1/3" 4MP CMOS	1/3" 4MP CMOS	1/3" 4MP CMOS	1/1.8" 4MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	130 dB True WDR	120 dB True WDR	130 dB True WDR
Max. IR Distance	98 ft	98 ft, White LED	98 ft, White LED	131 ft, White LED
Max. Resolution & Frame Rate	4MP (2560×1440) @ 20 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps	4MP (2688×1520) @ 30 fps
Audio I/O	- Built-in Mic	1/1 Built-in Mic Built-in Speaker	1/1 Built-in Mic Built-in Speaker	- Built-in Mic
Alarm I/O	-	1/1	1/1	-
Protection	IP67	IP67	IP67	IP67
Memory Slot	128 GB micro SD slot	512 GB micro SD slot	512 GB micro SD slot	512 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 ES1280ZJ-DM8 (16.5) UJB129-W (15) UWB129-W (20)  ES1275ZJ-SUS (29) ES1276ZJ-SUS (31)  ES1273ZJ-130-TRL (25) ES1271ZJ-130-TRL (45)	 ES1280ZJ-DM21 (12.5) ES1273ZJ-140 (21)	 ES1280ZJ-DM21 (12.5) ES1273ZJ-140 (21)	 ES1275ZJ-SUS (29) ES1273ZJ-140 (21)

	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA	PRO IP CAMERA
Models	SIP48D3V/28-H2	SIP48D4V/MZ28120-H	SIP48T3VM/28-H2	SIP48T3M/28-DX
	 4K PP FD AI	 4K PP FD AI	 4K PP FD AI	 Full-Color 4K FD AI
Image Sensor	1/2.8" 8MP CMOS	1/2.8" 8MP CMOS	1/2.8" 8MP CMOS	1/1.8" 8MP CMOS
Lens	2.8 mm fixed lens	2.8 - 12 mm motorized lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120 dB true WDR	120 dB true WDR	120 dB true WDR	130 dB True WDR
Max. IR Distance	98 ft	131 ft	98 ft	131 ft, White LED
Max. Resolution & Frame Rate	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 20 fpss	8MP (3840×2160) @ 20 fps	8MP (3840×2160) @ 25 fps
Audio I/O	-	1/1	- Built-in Mic	- Built-in Mic
Alarm I/O	-	1/1	-	-
Protection	IP67, IK10	IP67, IK10	IP67	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	512 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE
Accessories	 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)	 ES1275ZJ-SUS (29)  ES1473ZJ-155 (34)	 ES1280ZJ-DM8 (16.5)  UJB129-W (15)  UWB129-W (20)	 ES1275ZJ-SUS (29)  ES1273ZJ-140 (21)
	 ES1280ZJ-DM18 (12.5)  ES1272ZJ-110 (31)	 ES1276ZJ-SUS (31)  ES1280ZJ-DM55 (20)	 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)	
	 ES1271ZJ-110 (33)  ES1250ZJ (9)	 UJB155-W (15)  UWB155-W (20)	 ES1273ZJ-130-TRL (25)  ES1271ZJ-130-TRL (45)	
	I I		I I	

	PRO IP CAMERA	PRO IP CAMERA	PROJECT IP CAMERA	PROJECT IP CAMERA
Models	SIP48T3M/28PAD-DX	SIPSP8MASBR/4-U2	SIP42B4ATH/4	SIP44D4/PTRZ-U
	 AI-ISP Active Deterrence 4K AI RB	 Full-Color PANO 4K PP AI	 Thermal Fire	 Full-Color
Image Sensor	1/1.8" 8MP CMOS	1/1.8" 8MP CMOS (2)	1/2.8" 2MP CMOS	1/1.8" 4MP CMOS
Lens	2.8 mm fixed lens	4.0 mm fixed lens	4.0 mm (3.1 mm) fixed lens	2.8 - 12 mm motorized lens
Wide Dynamic Range	130 dB True WDR	130 dB true WDR	DWDR	130 dB True WDR
Max. IR Distance	98 ft, White LED	131 ft, White LED	131 ft	131 ft, White LED
Max. Resolution & Frame Rate	8MP (3840×2160) @ 25 fps	8MP (5120×1440) @ 15 fps	4MP(2688×1520)(160×120)@25fps	4MP (2688×1520) @ 30 fps
Audio I/O	1/1 Built-in Mic	1/1 Built-in Mic Built-in Speaker	1/1	1/1 Built-in Mic Built-in Speaker
Alarm I/O	1/1	1/1	2/2	1/1
Protection	IP67	IP67	IP66	IP66, IK10
Memory Slot	512 GB micro SD slot	256 GB micro SD slot	128 GB micro SD slot	512 GB micro SD slot
Power	12 V DC / PoE	12 V DC	12 V DC / PoE	12 V DC / PoE
Accessories	 ES1275ZJ-SUS (29)  ES1273ZJ-140 (21)	 ES1275ZJ-SUS (29)  ES1473ZJ-155 (34)	 UJB120-W (14)	
		 ES1280ZJ-DM55 (20)		
				I

	PROJECT IP CAMERA	PROJECT IP CAMERA
Models	SIPSB4AGZ/4-U3	SIPSB8AGZ-28-U2
	 Full-Color Solar 4G	 Full-Color Solar 4G 4K PP FD AI
Image Sensor	1/3" 4MP CMOS	1/1.2" 8MP CMOS
Lens	4.0 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	DWDR	130 dB True WDR
Max. IR Distance	98 ft, White LED	98 ft, White LED
Max. Resolution & Frame Rate	4MP (2560×1440) @ 30 fps	8MP (3840×2160) @ 15 fps
Audio I/O	- Built-in Mic Built-in Speaker	1/1
Alarm I/O	-	1/1
Protection	IP67	IP67
Memory Slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC	12 V DC / 80 W Solar Panel
Accessories		

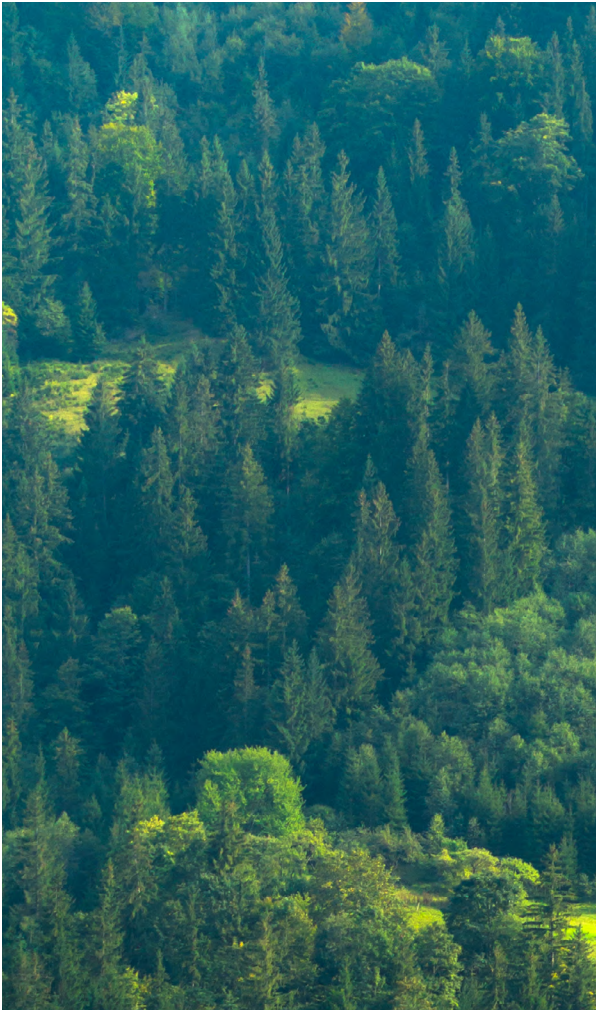

	PROJECT IP CAMERA	PROJECT IP CAMERA	PROJECT IP CAMERA	PROJECT IP CAMERA
Models	SIPSP5(4)/MZ-2	SIPSF6MS/13-EB2	SIPSF6MS/13-E2	ISIP44BCAV-MZ-25X
		 Fisheye PANO 4K	 Fisheye PANO	 FD AI
Image Sensor	1/2.4" / 1/2.5" 5MP CMOS	1/1.8" 12MP CMOS	1/1.8" 6MP CMOS	1/2.5" 4MP CMOS
Lens	2.8 - 8 mm focal / 2mm fixed lens	1.29 mm fixed lens	1.16 mm fixed lens	4.7 - 118 mm focal lens 25x
Wide Dynamic Range	120 dB true WDR	DWDR	DWDR	140 dB True WDR
Max. IR Distance	98 ft	49 ft	49 ft	656 ft
Max. Resolution & Frame Rate	5MP (2560×1920) @ 30 fps	6MP (3504×3504) @ 30 fps	6MP (2560×2560) @ 30 fps	4MP (2688×1520) @ 30 fps
Audio I/O	1/1	1/1 Built-in Mic Built-in Speaker	1/1 Built-in Mic Built-in Speaker	1/1
Alarm I/O	2/2	2/2	2/2	2/2
Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Memory Slot	1 TB micro SD slot	256 GB micro SD slot	256 GB micro SD slot	256 GB micro SD slot
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC
Accessories		 ES1280ZJ-DM21 (12.5)  ES1273ZJ-140 (21)	 ES1280ZJ-DM21 (12.5)  ES1273ZJ-140 (21)	 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)

SOLAR-POWERED SECURITY GETS FLEXIBLE



Stay strong, stay reliable



Solar-powered security gets flexible



Designed for a variety of scenarios



	PROJECT IP CAMERA	NETWORK PTZ	NETWORK PTZ	NETWORK PTZ
Models	SIP48D4/PTRZ-U	SPT4C225IR-E(S6)	SPT4C425IR-E(T5)	SPT5C425IR-E(T5)
	 Full-Color 4K	 FD	 FD Auto-Tracking	
Image Sensor	1/1.8" 8MP CMOS	1/2.8" 2MP CMOS	1/2.8" 4MP CMOS	1/2.8" 4MP CMOS
Lens	2.8 - 12 mm motorized lens	4.8 - 120 mm focal lens 25×	4.8 - 120 mm focal lens 25×	4.8 - 120 mm 25×
Wide Dynamic Range	130 dB True WDR	120 dB true WDR	120 dB True WDR	120 dB True WDR
Max. IR Distance	131 ft, White LED	164 ft	98 ft	492 ft
Max. Resolution & Frame Rate	8MP (3200×1800) @ 30 fps	2MP (1920×1080) @ 30 fps	4MP (2560×1440) @ 30 fps	4MP (2560×1440) @ 30 fps
Audio I/O	1/1 Built-in Mic Built-in Speaker	1/1	1/1	1/1
Alarm I/O	1/1	2/2	2/2	2/1
Protection	IP66, IK10	IP66	IP66	IP66
Memory Slot	512 GB micro SD slot	256 GB micro SD slot	256 GB Micro SD	256 GB Micro SD
Power	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE	12 V DC / PoE+
Accessories		 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)	 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)	 ES1602ZJ (23)  ES1275ZJ (25)
		 ES1605ZJ (28)	 ES1605ZJ (28)	 ES1672ZJ (17)  ES1661ZJ (25)
				 ES1660ZJ (63)  ES1662ZJ (28)

	VALUE DVR
Models	iSD2104/6I-KC
	 4 CH DVR AI
Video Compression	H.265+ / H.265 / H.264
Video Format	HDTVI / HDCVI / AHD / IP
Max. BNC Recording Rate	5MP Lite @ 15 fps
Max. BNC Resolution	4MP
BNC Video Input	4 CH
Bandwidth In/Out	-
Display	HDMI / VGA
Playback	4
Audio In/Out	1/2 RCA
Alarm In/Out	-
Ethernet Port	1× RJ-45 10/100 Mbps
USB	2× USB 2.0
Storage	1× 10 TB
Power	12 V DC
Video Analytics	VCA

 Perimeter Protection

 Motion Detection 2.0


 Facial Recognition

Enhanced Intelligence

Enhanced intelligent channels:
Up to 8 channels of perimeter protection (1x improvement)

Boosted performance:
By optimized algorithm for perimeter protection

3 intelligent functions in 1 device:
Different channels can be configured with different intelligent functions

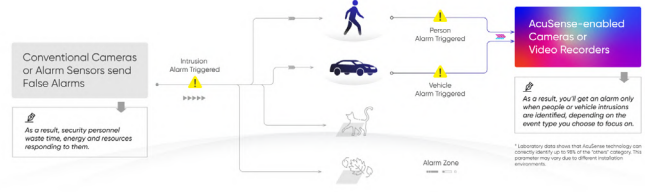

How does AcuSense work?

AcuSense technology uses advanced machine vision AI algorithms built into Hikvision security cameras and video recorders to boost home and business security. Check the diagram below for details.

	VALUE DVR	PRO DVR	PRO DVR	PRO DVR
Models	iSD2432/48I-KC	ISD2104/6I-X1	ISD2108/12I-X1	ISD2216/24I-X2
	 32 CH DVR AI	 4 CH DVR AI	 8 CH DVR AI	 16 CH DVR AI
Video Compression	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264
Video Format	HDTVI / HDCVI / AHD / 960H / IP	HDTVI / HDCVI / AHD / IP	HDTVI / HDCVI / AHD / IP	HDTVI / HDCVI / AHD / IP
Max. BNC Recording Rate	4MP Lite @ 15 fps	8MP @ 8 fps	8MP @ 8 fps	8MP @ 8 fps
Max. BNC Resolution	4MP	5MP Lite	5MP Lite	5MP Lite
BNC Video Input	32 CH	4 CH	8 CH	16 CH
Bandwidth In/Out	200 Mbps / 160 Mbps	-	-	-
Display	HDMI1 / VGA, HDMI2	HDMI / VGA	HDMI / VGA	HDMI / VGA
Playback	16 CH	4	8	16
Audio In/Out	4/1 RCA	1/1 RCA	1/1 RCA	1/1 RCA
Alarm In/Out	16/4	-	-	-
Ethernet Port	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100 Mbps	1× RJ-45 10/100/1000 Mbps	1× RJ-45 10/100/1000 Mbps
USB	2× USB 2.0, 1× USB 3.0	2× USB 2.0	1× USB 2.0, 1× USB 3.0	1× USB 2.0, 1× USB 3.0
Storage	4× 12 TB	1× 10 TB	1× 10 TB	2× 10 TB
Power	100 ~ 240 V AC	12 V DC	12 V DC	12 V DC
Video Analytics	VCA	VCA	VCA	VCA

	PRO DVR	PRO DVR	PRO DVR	PRO DVR
Models	ISD5104/8I-X1	ISD5108/16I-X1	ISD5216/32I-X2	iSD5432/48I-K
				
	4 CH DVR 	8 CH DVR 	16 CH DVR 	32 CH DVR 
Video Compression	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264
Video Format	HDTV / HDCVI / AHD / IP	HDTV / HDCVI / AHD / IP	HDTV / HDCVI / AHD / IP	HDTV / HDCVI / AHD / IP
Max. BNC Recording Rate	8MP @ 8 fps	8MP @ 8 fps	8MP @ 8 fps	8MP @ 8 fps
Max. BNC Resolution	8MP	8MP	8MP	8MP
BNC Video Input	4 CH	8 CH	16 CH	32 CH
Bandwidth In/Out	96 Mbps (Total)	256 Mbps (Total)	256 Mbps (Total)	320 Mbps / 256 Mbps
Display	HDMI / VGA	HDMI / VGA	HDMI / VGA	HDMI1 / VGA, HDMI2
Playback	4	8	16	16
Audio In/Out	1/1 RCA	1/1 RCA	1/1 RCA	4/1 RCA
Alarm In/Out	-	-	-	16/4
Ethernet Port	1× RJ-45 10/100 Mbps	1× RJ-45 10/100 Mbps	1× RJ-45 10/100 Mbps	1× RJ-45 10/100/1000 Mbps
USB	2× USB 2.0	1× USB 2.0, 2× USB 3.0	1× USB 2.0, 2× USB 3.0	2× USB 2.0, 1× USB 3.0
Storage	1× 10 TB	1× 12 TB	2× 12 TB	4× 12 TB
Power	12 V DC	12 V DC	12 V DC	100 ~ 240 V AC
Video Analytics				
	I			

	VALUE HD CAMERA	VALUE HD CAMERA	VALUE HD CAMERA	VALUE HD CAMERA
Models	SCC32T2/28-C	SCC32T3M/28-C	SCC32T4M/28-AD	SCC35B3/28-HC
				
				
Image Sensor	2MP CMOS	2MP CMOS	2MP CMOS	5MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	DWDR	DWDR	DWDR	DWDR
Max. IR Distance	66 ft	65 ft	131 ft	98 ft
Video Output	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS
Max. Resolution & Frame Rate	2MP (1920×1080) @ 30 fps	2MP (1920×1080) @ 30 fps	2MP (1920×1080) @ 30 fps	5MP (2560×1944) @ 20 fps
Audio I/O	-	-	-  	-
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Power	12 V DC	12 V DC	12 V DC	12 V DC
Accessories	 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)	 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)	 ES1273ZJ-130-TRL (25)  ES1280ZJ-DM8 (16.5)	 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)
	 ES1280ZJ-XS (14)  ES1272ZJ-110-TRS (22)	 ES1280ZJ-XS (14)  ES1272ZJ-110-TRS (22)		 ES1280ZJ-XS (14)  UJB94-W (13)
	 UJB94-W (13)			


	VALUE HD CAMERA	VALUE HD CAMERA	VALUE HD CAMERA	VALUE HD CAMERA
Models	SCC35D2/28-HC	SCC35T4/G28-HC	SCC35T4/MZ27135-HC	SCC35T4/GMZ-H
				
Image Sensor	5MP CMOS	5MP CMOS image sensor	5MP CMOS	1/2.5" 5MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.7 - 13.5 mm motorized lens	2.7 - 13.5 mm motorized lens
Wide Dynamic Range	DWDR	DWDR	DWDR	DWDR
Max. IR Distance	66 ft	131 ft	131 ft	131 ft
Video Output	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS	TVI / AHD / CVI / CVBS
Max. Resolution & Frame Rate	5MP (2560×1944) @ 20 fps	5MP (2560×1944) @ 20 fps	5MP (2560×1944) @ 20 fps	5MP (2560×1944) @ 20 fps
Audio I/O	-	-	-	-
Alarm I/O	-	-	-	-
Protection	IP67, IK10	IP67	IP67	IP67
Power	12 V DC	12 V DC	12 V DC	12 V DC
Accessories	  ES1275ZJ-SUS (29) ES1271ZJ-110 (33)   ES1280ZJ-DM18 (12.5) ES1272ZJ-110-TRS (22)   ES1273ZJ-130-TRL-G (25) ES1280ZJ-M-G (21)   UJB129-G (12.5) UWB129-G (17)	  ES1275ZJ-SUS (29) ES1276ZJ-SUS (31)   ES1280ZJ-M (21) ES1273ZJ-130-TRL (25)   ES1273ZJ-130-TRL-G (25) ES1280ZJ-M-G (21)   UJB129-G (14) UWB129-G (18)	  ES1275ZJ-SUS (29) ES1276ZJ-SUS (31)   ES1280ZJ-M (21) ES1273ZJ-130-TRL (25)   ES1273ZJ-130-TRL-G (25) ES1280ZJ-M-G (21)   UJB129-G (14) UWB129-G (18)	  ES1275ZJ-SUS (29) ES1276ZJ-SUS (31)  ES1280ZJ-M (21) ES1273ZJ-130-TRL (25)  ES1273ZJ-130-TRL-G (25) ES1280ZJ-M-G (21)   UJB129-G (14) UWB129-G (18)

	VALUE HD CAMERA	PRO HD CAMERA	PRO HD CAMERA	PRO HD CAMERA
Models	SCC38T2-28-UD	SCC52B7/MZ-M	SCC52T5/36-M	SCC75B2/28-U
	 Full-Color 4K			 Full-Color
Image Sensor	8MP CMOS	2MP CMOS	2MP CMOS	5MP progressive scan CMOS
Lens	2.8 mm fixed lens	2.7 - 13.5 mm motorized lens	3.6 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	DWDR	120 dB true WDR	120 dB true WDR	130 dB true WDR
Max. IR Distance	131 ft, White LED	230 ft	164 ft	66 ft, White LED
Video Output	TVI / AHD / CVI / CVBS	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H
Max. Resolution & Frame Rate	8MP (3840×2160) @ 15 fps	2MP (1920×1080) @ 30 fps	2MP (1920×1080) @ 30 fps	5MP (2560×1944) @ 20 fps
Audio I/O	-	-	-	-
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Power	12 V DC	12 V DC / 24 V AC	12 V DC / 24 V AC	12 V DC
Accessories	  ES1280ZJ-XS (14) ES1272ZJ-110-TRS (22)	  ES1275ZJ-SUS (29) ES1276ZJ-SUS (31)   ES1280ZJ-S (21) UJB94-W (13)	  ES1275ZJ-SUS (29) ES1276ZJ-SUS (31)   ES1280ZJ-S (21) ES1272ZJ-110-TRS (22) 	  ES1275ZJ-SUS (29) ES1276ZJ-SUS (31) 

	PRO HD CAMERA	PRO HD CAMERA	PRO HD CAMERA	PRO HD CAMERA
Models	SCC75B4/28-U	SCC75T2/28-U	SCC78B2/28-U	SCC78B4/28-U
	 Full-Color	 Full-Color	 Full-Color 4K	 Full-Color 4K
Image Sensor	5MP progressive scan CMOS	5MP CMOS	8MP CMOS	8MP CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	130 dB true WDR	130 dB true WDR	130 dB true WDR	130 dB true WDR
Max. IR Distance	131 ft, White LED	66 ft, White LED	66 ft, White LED	131 ft, White LED
Video Output	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H
Max. Resolution & Frame Rate	5MP (2560×1944) @ 20 fps	5MP (2560×1944) @ 20 fps	8MP (3840×2160) @ 15 fps	8MP (3840×2160) @ 15 fps
Audio I/O	-	-	-	-
Alarm I/O	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Power	12 V DC	12 V DC	12 V DC	12 V DC
Accessories	 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)  ES1280ZJ-XS (14)  UJB94-W (13)	 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)  ES1280ZJ-M (21)  ES1273ZJ-130-TRL (25)  UJB129-W (15)  UWB129-W (20)	 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)  ES1280ZJ-XS (14)  UJB94-W (13)	 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)  ES1280ZJ-XS (14)  UJB94-W (13)

	PRO HD CAMERA	HD PTZ
Models	SCC48T6/28-K	SAZ5C232IR-A
	 4K	
Image Sensor	8MP CMOS	1/2.8" 2MP progressive scan CMOS
Lens	2.8 mm fixed lens	120 dB true WDR
Wide Dynamic Range	DWDR	4.8 - 153 mm lens 32x
Max. IR Distance	197 ft	492 ft
Video Output	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H
Max. Resolution & Frame Rate	8MP (3840×2160) @ 15 fps	2MP (1920×1080) @ 30 fps
Audio I/O	-	-
Alarm I/O	-	2/1
Protection	IP67	IP66, TVS Lighting
Power	12 V DC	24 V AC
Accessories	 ES1275ZJ-SUS (29)  ES1276ZJ-SUS (31)  ES1280ZJ-M (21)  UJB129-W (15)  ES1273ZJ-130-TRL (25)  UWB129-W (20)	 ES1661ZJ (25)  ES1275ZJ (25)  ES1662ZJ (28)  ES1672ZJ (17)  ES1660ZJ (63)  ES1602ZJ (23)



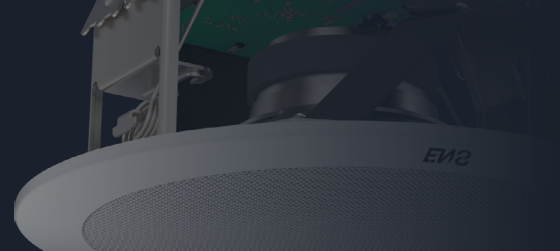

EPA			
	Model	Description	Accessory
	EPA-PM9100 NEW	• Network Paging Microphone • 12 V DC / PoE • Multicast , ×20 (Editable) • Opus, PCMU (G.711u), PCMA(G.711a), G.722 • ×1 Line Input (3.5 mm port) • Input Sensitivity-10 dB • 1024 MB Audio Storage • Audio file format: WAV, MP3	
	EPA-PG2000 NEW	• Network Paging Gateway • PoE • Multicast , ×20 (Editable) • Opus, PCMU (G.711u), PCMA(G.711a), G.722 • Line Input ×1 Line/Mic Input (Balanced, switchable) • Input Sensitivity -10 dB (Line), -20 dB (Mic) • Bluetooth Input and built-in speaker • Audio file format: WAV, MP3	
	EPA-AI3000 NEW	• Network Audio Interface • 24 V DC / PoE • Multicast , ×20 (Editable) • Opus, PCMU (G.711u), PCMA(G.711a), G.722 • ×1 Line/Mic Input (Balanced, switchable) • Input Sensitivity -10 dB (Line), -20 dB (Mic) • Bluetooth Input and built-in speaker • Audio file format: WAV, MP3	
	EPA-NS6301-15 NEW	• Network Horn Speaker • 24 V DC / PoE, 15 W • 121 dB • Opus, PCMU (G.711u), PCMA(G.711a), G.722 • Built-in Mic, electret condenser mic • Max 20 Audio files, 80 MB audio storage • Audio file format: WAV, MP3	
	EPA-NS6300-30 NEW	• Network PoE Horn Speaker (30W) • 30 W (24 V DC), 15 W (12 V DC), 15 W • 121 dB • Opus, PCMU (G.711u), PCMA(G.711a), G.722 • Built-in Mic, electret condenser mic • Max 20 Audio files, 80 MB audio storage • Audio file format: WAV, MP3	
	EPA-NS6000-20 NEW	• Network Wall Speaker • 24 V DC PoE • 90 dB • Opus, PCMU (G.711u), PCMA(G.711a), G.722 • Built-in Mic, electret condenser mic • Bluetooth Input, 2.4 GHz • Max 20 Audio files, 80 MB audio storage • Audio file format: WAV, MP3	
	EPA-NS6200-12 NEW	• Network Ceiling Speaker • 12 V DC PoE • Multicast , ×20 (Editable) • Input Sensitivity -10 dB (Line), -20 dB (Mic) • Opus, PCMU (G.711u), PCMA(G.711a), G.722 • ×1 Line/Mic Input (Balanced, switchable) • Bluetooth Input, 2.4 GHz • Max 20 Audio files, 80 MB audio storage • Audio file format: WAV, MP3	
	EPA-AS6200-3 NEW	• Analog Ceiling Speaker • Frequency Response 100 ~ 16 kHz • 3 W Rated Power • Rated Impedance 8Ω • Operating Temperature -10 °C ~ +50 °C • 2-year warranty	

Lysora Cloud Links Your Success with

 Optimization
  Reliability
  AI



AI BOM

Get a tailored network plan with ideal gateways, switches, and APs.



AI Designer

Visualize AP and bridge coverage instantly by uploading a floor plan or using Google Maps.




AI Diagnostics


Diagnose wired, wireless, and gateway issues instantly with AI-powered insights.

Lysora			
	Model	Description	Price
	L6 NEW	- Lysora Access Point - Wi-Fi 6 AX3000 indoor ceiling mount access point - Dual-stream and dual-band 1× GE port 802.3at PoE In or DC power supply	
	L6LITE NEW	- Lysora Access Point - Wi-Fi 6 AX1800 dual-band ceiling mount w/ built-in antennas 1× 1GE LAN port;dual-band 2.4 GHz/5 GHz - AP mode and routing mode - Unified networking and management based on Lysora Cloud App - PoE In and local power supply	
	L7 NEW	- Lysora Access Point - Wi-Fi 7 BE5000 dual-band ceiling mount access point - Dual-band 2.4 GHz/5 GHz, high throughput with 5 spatial streams 1× 100/1000/2500BASE-T port and 1× 100/1000BASE-T port - AP and routing mode - Unified networking and management based on Lysora Cloud App - Max power consumption < 30 W 802.3at PoE In and 12 V DC power supply	


Lysora		
	Model	Description
	L7LITE NEW	• Lysora Access Point • Wi-Fi 7 BE3600 dual-band ceiling mount access point • Dual-band 2.4 GHz/5 GHz, high throughput with 4 spatial streams • 1× 100/1000/2500BASE-T port • AP and routing mode • Unified networking and management based on Lysora Cloud App • Max power consumption <14 W; 802.3at PoE In & 12 V DC power supply
	LR300G-P NEW	• Lysora Router, Desktop 10-port full gigabit router • Providing one WAN port • 6× LAN ports, and 3× LAN/WAN ports • Supporting eight PoE/PoE+ interfaces & max. 110 W PoE power • Recommended concurrency of 300 • Max. 1.5 Gbps throughput • Cloud remote management supported
	LCS-4GS-P NEW	• Lysora POE Switch • 6-Port Gigabit Smart POE Switch • 4 PoE/POE+ Ports with 1 Gigabit RJ45/1 combo SFP uplink ports • 54 W PoE power budget • Desktop Steel Case
	LCS-8GS-P NEW	• Lysora POE Switch • 10-Port Gigabit Smart POE Switch • 8 PoE/POE+ Gigabit RJ45 Ports w/ 1 Gigabit RJ45/1 combo SFP uplink ports • 120 W PoE power budget • Desktop Steel Case
	LCS-16GS-P NEW	• Lysora POE Switch • 20-Port Gigabit Smart POE Switch • 16 PoE/POE+ Ports with 2 Gigabit RJ45/2 SFP uplink ports • 250 W PoE power budget • Desktop Steel Case
	LCS-24GS-P NEW	• Lysora POE Switch • 28-Port Gigabit Smart POE Switch • 24 PoE/POE+ Gigabit RJ45 Ports w/ 2 Gigabit RJ45/2 SFP uplink ports • 370 W PoE power budget • Desktop Steel Case
	LS2-24GT4SFP-P NEW	• Lysora POE Switch • 24-Port Gigabit L2 Managed POE Switch • 24 Gigabit RJ45 POE/POE+ Ports • 4 SFP Slots • 370W PoE power budget • 19-inch Rack-mountable Stell Case
	CPE3-P NEW	• Lysora Wireless Bridge • The 5 GHz wireless bridge CPE delivers a max. wireless rate of 867 Mbps and is equipped with a 13 dBi high-gain directional antenna • It supports a long-distance data transmission of up to 3 km (1.86 miles) with three 100 Mbps ports and IP55 weatherproof rating • Supports TDMA with 1 to 5 PTMP CPEs • Supported on eWeb and Lysora Cloud • 24 V DC power adapter and one PoE injector
	CPE5 NEW	• Lysora Wireless Bridge • The 5 GHz wireless bridge CPE delivers a max wireless rate of 867 Mbps and is equipped w/ a 16 dBi high-gain directional antenna • Supports a long-distance data transmission of up to 5 km (3.11 miles) with three GE ports and IP55 weatherproof rating • Supports TDMA with 1 to 5 PTMP CPEs, is managed on Web and Lysora Cloud • Includes two 24 V DC power adapters and two PoE injectors



Akuvox Video Intercom & Access Control			
Model	Description	Accessory	
	S535 <i>NEW</i> - Aluminum panel with 5" touchscreen - Linux operation system - Wide-angle camera: 116° (H), 62° (V) - Two-way audio communication over IP networks - Multi-way access feature including - Support expandable module: LTE or Fingerprint or Induction Loop - Complies with SIP & ONVIF		
	S539 10" Touch Screen SIP Android Door Phone with Facial Recognition - Android 12 - Three cameras, main camera: 5MP - Bluetooth, PoE, Weigand	 S539-ikit-on-wall (119)	 S539-on-wall-rc (119)
		 S539-ikit-in-wall (119)	 S539-in-wall-rc (119)
	S562-WHT 7" (1024×600) Touch SIP Indoor Monitor - Linux powered - H.264, RS485 Support 1× Relay Out, 1× Bell In, 8× I/O - Built-in Mic and Speaker 2× FE (1× PoE), 12 V DC / 1 A	 S562-TBST (55)	
	S562W-V2-GRY 7" Capacitive LCD Touch Screen - Linux OS 1× RS485 Port 1× Relay Out, 1× Bell In, 8× I/O - Built-in Mic and Speaker 2× RJ45, 12 V DC / POE	 S562-TBST (55)	
	 S563W-V2-WHT 7" (1024×600) Touch SIP Indoor Monitor, - Android 12, 5 Ghz Wi-Fi 6 - BLE 5, H.264, RS485 Support 1× Relay Out, 1× Bell In, 8× I/O - Built-in Mic and Speaker 2× FE (1× PoE), 12 V DC / 1 A	 S563-TBST (55)	
	 S565W-WHT 10" (1280×800) Touch SIP Indoor Monitor - Linux, 5 Ghz Wi-Fi 6 - BLE5, H.264, RS485 2× Relay Out, 1× Bell In, 8× I/O - Built-in Mic and speaker, MicroSD 2× FE (PoE), 12 V DC / 1 A	 S565-TBST (55)	
	 S567A 10" (1280×800) Touch SIP Indoor Monitor with 1MP camera - Android 9, 2.4 Ghz Wi-Fi 4, BLE 4.2 - H.264, RS485 Support 2× Relay Out, 1× Bell In, 8× I/O - Built-in Mic and speaker, MicroSD 1× FE (1× PoE), 12 V DC / 1 A	 S567-TBST (55)	
	 E12W-SIL - SIP Video Door Bell with Relay & Wi-Fi 2MP Camera - Angle: 123°(H) / 69°(V) and LED White Light - PoE (IEEE802.3af, Power-over-Ethernet) - Water-proof & Dust-proof: IP65 - Two-way audio communication over IP networks with Echo Cancel	 E12X-anglebrkt (119)	 E12X-on-wall-rc (119)

Akuvox Video Intercom & Access Control			
	Model	Description	Accessory
	E16C	- SIP Door Phone with Facial Recognition 5" Touch Screen - Dual cameras with anti-spoofing algorithm - Stand-alone operation 20,000 face capacity & 20,000 card capacity - PoE	 A05X-E16X-ON-WALL-RC (119)
			 E16-IKIT-IN-WALL (119)
	E18C	- SIP Doorphone with Facial Recognition 7" Touch Screen - Dual cameras with anti-spoofing algorithm - Stand-alone operation 20,000 face capacity & 20,000 card capacity - RF, FR, IC, ID, NFC, PoE, Weigand, RS485 - IP65	 E18X-ON-WALL-RC (119)
	R20A	- Vandal resistant body, with a flush button - Wide-angle camera: 120° (H), 64° (V) - PoE (IEEE802.3af, Power-over-Ethernet) 2-way audio communication over IP networks - Complies with ONVIF standard for easy integration	 R20A-ROTBK (119)
			 R20A-IKIT-IN-WALL (119)
	R20A-2	2-wire SIP Intercom with one Button - Vandal resistant body, with a flush button; - Two-pin wire for power supply and network access - Wide-angle camera: 110° (H), 58° (V); - IC/ID Card Reader embedded; - Two-way audio communication over IP networks - H.264 video compression; - IP65	 R20A-IN-WALL-RC (119)
			 R20A-ON-WALL-RC (119)
	R20BX3	SIP Intercom with Three (3) Buttons (Video & Card reader)	 R20A-ROTBK (119)
			 R20A-IKIT-IN-WALL (119)
	R20BX5	SIP Intercom with Five (5) Buttons (Video & Card reader)	 R20A-IN-WALL-RC (119)
			 R20A-ON-WALL-RC (119)
	R20K-SIL	- Slim SIP Intercom with Keypad and RF card reader - IP65, PoE	 R20KB-ROTBK (119)
			 R20A-IKIT-IN-WALL (119)
	R25A	- Compact SIP Video Doorphone w/ Keypad and RF Card Reader, 4MP Wide-angle camera - IP65, Onvif, POE	 R20KB-IN-WALL-RC (119)
			 R20KB-ROTBK (119)
	R28A-V2 NEW	- SIP Door phone with Numeric Keypad and 4.3" LCD - Vandal resistant body, with flush buttons; - Wide-angle camera: 116° (H), 60° (V); - PoE (IEEE802.3af, Power-over-Ethernet); 2-way audio communication over IP networks	 R20KB-ON-WALL-RC (119)
			 R20KB-ROTBK (119)
	R27X-R28X-IKIT-IN-WALL (119)	- SIP Door phone with Numeric Keypad and 4.3" LCD - Vandal resistant body, with flush buttons; - Wide-angle camera: 116° (H), 60° (V); - PoE (IEEE802.3af, Power-over-Ethernet); 2-way audio communication over IP networks	 R20A-ROTBK (119)
			 R20A-IKIT-IN-WALL (119)
	R27X-R28X-ON-WALL (119)	- SIP Door phone with Numeric Keypad and 4.3" LCD - Vandal resistant body, with flush buttons; - Wide-angle camera: 116° (H), 60° (V); - PoE (IEEE802.3af, Power-over-Ethernet); 2-way audio communication over IP networks	 R20A-IN-WALL-RC (119)
			 R20A-ON-WALL-RC (119)



Akuvox Video Intercom & Access Control

Model	Description	Accessory
 ● R29C-SIL ● R29C-BLK	• SIP Android Door Phone with Facial Recognition • H.264 video and G.722 audio codec • Display: 7" IPS LCD capacitive touch screen 1280×800 • Bluetooth, and Wireless feature • Water-proof & Dust-proof: IP65; Collision-proof: IK06 • PoE (IEEE802.3af, Power-over-Ethernet) • Support Wiegand, 13.56 MHz & 125 kHz Card reader	 R29X-IN-WALL-RC-SIL (119) R29X-ON-WALL-RC-SIL-BLK (119)  R29X-1KIT-IN-WALL (119) R29X-1KIT-ON-WALL (119)
 X910S NEW	• SIP Doorphone w/ Call Button • RFID, NFC, & BLE 5, Tamish, Linux • 5MP WDR Main Cam, 2MP Package Cam • ONVIF, H.264, Wiegand, OSDP, 2/2 x Relay-In/Out • MicroSD, Mic/Speaker • IP66, IK10 • 1 x FE (PoE+), 12VDC/0.6A Out	
 X912K NEW	• SIP Doorphone w/ Keypad, Face Recognition • RFID, NFC, QR, & BLE 5, Tamish, Linu • 4" (480x480) Touch LCD, 2MP 2.95mm WDR Main Cam • ONVIF, H.264, Wiegand, OSDP-in, 3/2 Relay I/O • Built-in Mic/Speaker • IP65, IK08 • 1x FE (PoE+), 12 V DC/2.5 A In, 12 V DC/0.7 A Out	 X912-1KIT-IN-WALL (119) X912X-IN-WALL-RC (119)
 X915S-V2	• SIP Android 12 Door Phone with Facial Recognition • 8" LCD touch screen 1920×1080 • 5MP 2.9 mm Starlight Main Cam • ONVIF, H.264, Wiegand, OSDP, 3/3 x Relay-I/O • 1x FE (PoE+) • Microphone and Speaker • IP65 & IK10	 X915X-1KIT-IN-WALL (119) X915X-ON-WALL-RC (119)  X915X-1KIT-IN-WALL (119) X915X-IN-WALL-RC (119)
 X916S	• SIP Android Door Phone for high-end buildings • H.264 video and G.722 audio codec • Display: 13" fully-color IPS LCD • Camera: Three cameras for anti-counterfeit and QR code scan • Water-proof & Dust-proof: IP65; Collision-proof: IK06 • PoE (IEEE802.3af, Power-over-Ethernet) • Support Wiegand, 13.56MHZ&125KHZ Card reader	 X916-1KIT-IN-WALL (119) X916-1KIT-ON-WALL (119)  X916-ON-WALL-BOX-RC (119)
 X937A NEW	• 15.6" (1920 x 1080) Touch SIP Indoor Monitor • Android 14 w/ GMS & Voice Assistant • Wi-Fi 6, BLE 5.3, 5MP Camera, H.264 • 1 x HDMI-in, RS485, 2 x Relay Out, 1 x Bell In, 8 x I/O • Built-in Mic/Speaker • 2 x FE (1 x PoE+), 12 V DC/1 A	
 C313W-2-SIL	• 2-wire 7" (800×480) Touch SIP Indoor Monitor, Linux powered • 2.4 Ghz Wi-Fi 4, H.264, RS485 Support • 1x Relay Out, 1x Bell In, 8x I/O • Built-in mic and speaker • 1x FE, 2x 2-Wire (accepts NS-1 power), 48 V DC / 0.2 A	 C313-C315-TBST-WHT (55)
 EC33 NEW	• IP-Based Elevator Access Controller • 20K card capacity • 32 Relay Output Expandable to 64 Output via RS485 • Wiegand 26/34, RS485, 1 x FE 802.3af • 100-240 V AC, 10 W	
 SR01	• Compact Security Single Door I/O Module	

Akuvox Video Intercom & Access Control			
Model	Description		
	A02S	- A02-RFID+Keypad Access Control Terminal - Touch keypad front panel & Aluminum alloy frame 20,000 card capacity & 100,000 event logs - Support tamper alarm - Water-proof & Dust-proof: IP65 802.3af Power-over-Ethernet and 12 V DC connector (if not using PoE)	 A01X-A02X-A03X-ikit (40)
	A03S	- IP-based access control terminal w/ RFID, NFC, & BLE 5.0 1-door controller, 1x Wiegand, 2/1x Relay-In/Out - Built-in speaker - IP65 & IK07, FE - PoE or 12 V DC input, 1 A / 0.6 A I/O	 A01X-A02X-A03X-ikit (40)
	A05C	5" screen Access Control terminal 2MP camera - Support RFID, Face recognition, NFC, Bluetooth - QR code to access - IP65 - PoE	 A05X-E16X-ON-WALL-RC (119)  E16-ikit-IN-WALL (119)
	A08S	- Akuvox slim access control terminal /w keypad - RFID, NFC, & QR Code - Linux powered, 1-door controller, 1 x Wiegand, 1 x RS485, 2/1 x Relay-In/Out, - Built-in Speaker, - IP65 & IK09, - PoE or 12VDC input, 1.5A / 0.6A in/out	
	A094S	- Smart access controller control device with Ethernet interface - Supports TCP/IP communication and web interface for management - Supports up to 50,000 cards and 100,000 card presenting records - Up to 4 doors control 4 Wiegand 4 RS485, 13 Inputs, 8 relay	
	A095S NEW	4-Door Smart Access Controller - DIN Rail Mounted, Black, Linux 4-door controller, 500K card capacity 8x Wiegand/OSDP, 12/8 x Relay-In/Out - Wi-Fi 6, LTE Opt., 1 x FE (PoE+) 12 V DC/5 A In, 8 x 12VDC/0.5A max power Out	

Akuvox Accessory			
Model	Description	Price	
 NC-2	2-wire IP Network Switch, Support POE output, Long transmission distance via 2-wire cable, Powered by 48 V DC or NS-2	\$ 316	
 NX-2	Akuvox Ethernet to 2-Wire Adaptor Kit, Converts 2-Wire to 100 Mbps ethernet connection, PoE Powered	\$ 445	
 NS-2	2-wire IP Network Switch, 6 Terminals, 48 V DC	\$ 460	
 HDR-60-SPEC	Ultra slim design with 52.5 mm (3SU) width; Universal input 85 ~ 264 V AC (227 V AC operational); No load power consumption < 0.3 W	\$ 84	

Akuvox Accessory		
Model	Description	
 Bkey	BLE Physical Access Card; Support Contactless Access; Encrypt data transmission to enhance communication security	
 ACR-CID01	Desktop Card (BLE/IC/ID) Reader, USB 5 V / 0.5 A	
 ACR-CRM11	Akuvox Slim RFID Access Control Reader w/ Keypad, Aluminum body, Wiegand, IP65, 12 V DC	
 ACR-CRP11	Akuvox Slim RFID Access Control Reader w/ Keypad, Plastic body, Wiegand, IP65, 12 V DC	

Akuvox Accessory			
Model	Description	Price	
	AKR-CID12 Akuvox UHF Desktop Card Reader for Vehicle Tags, ISO/IEC18000-6C EPC Class1 Gen2, Buzzer, USB	\$667	
	AKR-CRP12 Akuvox UHF Access Control Reader for Vehicle Tags, ISO/IEC18000-6C EPC Class1 Gen2, Color Coded Indicator Light, Wiegand, USB, RS485, Buzzer, 9-15 V DC 3 A	\$1,180	
	UHF-TAG11 Akuvox UHF Vehicle Sticker Tag, White, ISO/IEC18000-6C EPC Class1 Gen2, 860-960 Mhz, PET, 9 m range, 110 mm x 45 mm	\$4	
	AHW-DRIRSSTD-L Stainless Steel Infrared Sensor Exit Button, Status LED, 12 V DC, Max. 1 A @ 30 V DC, Recessed Mount, US Gang Box	\$33.50	
	AHW-MLBKX-GU General U bracket for AHW-ML5 & AHW-ML10 series of Magnetic locks, Compatible with 500/1000 lbs., Aluminum	\$39.50	
	AHW-MLBK5D-L L Bracket for Outward Opening Double Door, Compatible with 500 lbs. AHW-ML5D series Magnetic Lock, Aluminum	\$28.50	
	AHW-MLBK5-L L Bracket for Outward Opening Door, Compatible with 500 lbs. AHW-ML5 series Magnetic Lock, Aluminum	\$14.50	
	AHW-MLBK5-ZL ZL Bracket for Inward Opening Door, Compatible with 500 lbs. AHW-ML5 series Magnetic Lock, Aluminum	\$30	
	AHW-MLBK10D-L L Bracket for Outward Opening Double Door, Compatible with 1000 lbs. AHW-ML10D series Magnetic Lock, Aluminum	\$39	
	AHW-MLBK10-L L Bracket for Outward Opening Door, Compatible with 1000 lbs. AHW-ML10 series Magnetic Lock, Aluminum	\$19.50	
	AHW-MLBK10-ZL ZL Bracket for Inward Opening Door, Compatible with 1000 lbs. AHW-ML10 series Magnetic Lock, Aluminum	\$52	
	AHW-DRPBLLNO-ITG Door Release Button (Plastic) w/ LED, NO/COM, Max. 3 A @ 36 VDC, Recessed Mount, International Square Gang Box	\$4.90	
	AHW-DRPBSSL-U1G Stainless Steel Door Release Button, LED, NO/NC/COM, Max. 3 A @ 36 V DC, Recessed Mount, US Gang Box	\$25	
	AHW-DRRBAL-U1G Aluminum Large Red Door Release Button, Stainless Steel Panel, NO/NC/COM, Max. 1 A @ 30 V DC, Recessed Mount, US Gang Box	\$23	

Akuvox Accessory		Model	Description
	AHW-DRGMBSS-U1G Green Mushroom Door Release Button, Stainless Steel Panel, NO/NC/COM, Max. 1 A @ 30 V DC, Recessed Mount, US Gang Box		
	AHW-DRABL-SFLG Push Button for Accessibility Entry, Dual Mode Status LED, NO/NC/COM, 12 ~ 24 V AC / DC, Max. 2 A @ 30 V DC, Square Surface Mount		
	AHW-DRTBTGL-SFU1G White Touch Exit Button, Mirrored Surface Tempered Glass, Status LED, NO/NC/COM, 12 ~ 24 V, Max. 1 A @ 30 V DC, Recessed Mount, US Gang Box		
	AHW-DCLSR125 Closer for 40 - 65 kg (88 - 143 lbs.) Door, 950 mm (37.4") Max Door Width, 1.5 kg (3.3 lbs)		
	AHW-DCLSR175 Closer for 40 - 65 kg (88 - 143 lbs.) Door, 950 mm (37.4") Max Door Width, 1.5 kg (3.3 lbs)		
	AHW-DCLSR200 Closer for 80 - 100 kg (176 - 220 lbs.) Door, 1200 mm (47.2") Max Door Width, 2.1 kg (4.6 lbs.)		
	AHW-ML5-LDSUL 500 lbs. UL Listed Single Door Magnetic Lock, Status LED, 12 V DC / 500 mA (±10%) or 24 V DC / 250 mA (±10%), ≤ +20°C (68°F) Surface Temp., Aluminum Shell		
	AHW-ML5D-LDSUL 500 lbs. x2 UL Listed Double Door Magnetic Lock, Status LED, 12 V DC / 500 mA (±10%) x2 or 24 V DC / 250 mA (±10%) x2, ≤ +20°C (68°F) Surface Temp., Aluminum Shell		
	AHW-ML10-TLDSUL 1000 lbs. UL Listed Single Door Magnetic Lock, Status LED, 12 V DC / 500mA (±10%) or 24 V DC / 250mA (±10%), ≤ +20°C (68°F) Surface Temp., Aluminum Shell		
	AHW-ML10D-TLDSUL 1000 lbs. x2 UL Listed Double Door Magnetic Lock, Status LED, 12 V DC / 500 mA (±10%) x2 or 24 V DC / 250 mA (±10%) x2, ≤ +20°C (68°F) Surface Temp., Aluminum Shell		
	AHW-DS10-SUL UL Listed American Standard Heavy Duty Electric Strike, 1000 lbs. Holding Force, 12 V DC / 320 mA (±10%) or 24 V DC / 160mA (±10%), ≤ +20°C (68°F) Surface Temp., Stainless Steel		
	AHW-MLBK5D-ZL ZL Bracket for Inward Opening Double Door, Compatible with 500 lbs. AHW-ML5D series Magnetic Lock, Aluminum		
	AHW-MLBK10D-ZL ZL Bracket for Inward Opening Double Door, Compatible with 1000 lbs. AHW-ML10D series Magnetic Lock, Aluminum		
	AHW-DRPBSSLNO-U1GWP Stainless Steel Waterproof Door Release Button, LED, NO/COM, 5 ~ 24 V DC, IP67, recessed mount, US Gang Box		



CLOUD MANAGED, FROM ENTERPRISE TO HOME

Full product family cloud-managed access, provide access to any user.

Streamlined Management 01


02 Hassle Free Installation

Tailored Configuration 03

04 Effective System Maintenance



▲ Provision in 3 mins via Self-Organizing Network

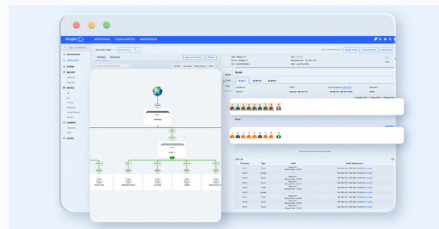


▲ VLAN visualized on Ruijie Cloud, lower technical barriers from configuration to management.



CENTRALIZED MANAGEMENT, EXPAND POSSIBILITIES

Satisfy the networking needs of your business through Ruijie Cloud.

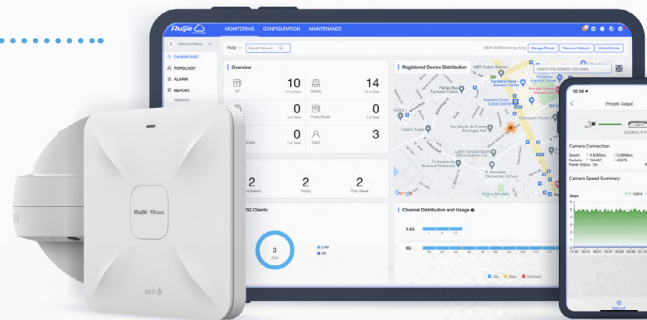

EASY MAINTENANCE, NO MATTER WHERE YOU ARE

Cloud toolkits help you solve problems efficiently and remotely, skip going onsite.


Real Topology

Intuitive monitoring of network status, devices statistics



Project Sharing

Ask for technical support remotely, without onsite technicians

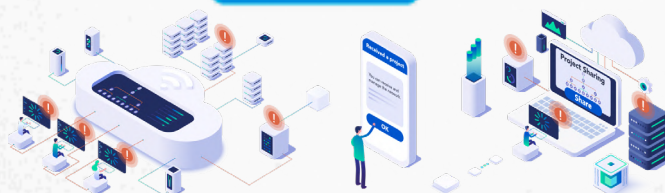

Alarm Notification

Response the network failure, fast positioning



Wi-Fi Optimization

Improve your Wi-Fi network at fingertips




Access Point			
	Model	Description	Accessory
	RG-RAP1260	• Wall Plate Access Point • AX3000 Dual Band WiFi 6 w/ 5× Int. Omni-Ant. (2.4GHz: 3 dBi, 5GHz: 5 dBi) • 1× GbE PoE+ Port, 4× GbE Ports • 512 max clients (110 recommended) • WebUI/Cloud/App management • PoE+ 802.3at @ 12 W (Power not included), IP41 • 3-year warranty	 ×10 RG-RAP1260-BC10 (47.5)  ×10 RG-RAP1260-GC10 (47.5)  ×10 RG-RAP1260-SC10 (47.5)  ×10 RG-POE-AF15 (17)
	RG-RAP2260	• Ceiling Mounted Access Point • AX3000 Dual Band WiFi 6 w/ 5× Int. Omni-Ant. (2.4 GHz: 3 dBi, 5 GHz: 3 dBi) • 1× 2.5 GbE PoE+ Port, 1× GbE Port • 512 max clients (110 recommended) • WebUI/Cloud/App management • PoE+ 802.3at @ 18 W or DC 12 V / 2 A (Power not included) • 3-year warranty	 ×10 RG-POE-AT30 (30)
	RG-RAP2266	• Ceiling Mounted Access Point • AX3000 Dual Band WiFi 6 w/ 5× Int. Omni-Ant. (2.4 GHz: 3 dBi, 5 GHz: 3 dBi) • 1× GbE PoE+ Port • 512 max clients (110 recommended) • WebUI/Cloud/App management • PoE+ 802.3at @ 18 W or DC 12 V / 2 A (Power not included) • 3-year warranty	 ×10 RG-POE-AT30 (30)
	RG-RAP6260H-D	• High-Density Directional Outdoor Access Point • AX6000 Dual Band WiFi 6 w/ 8× Int. Beam Ant. (60°H × 30°V) • 1× 2.5GbE PoE++ Port, 1× SFP Port • 512 max clients (130 recommended) • WebUI/Cloud/App management • PoE++ 802.3bt @ 40 W or DC 48 V / 1A (Power separate), IP68 • 3-year warranty	 ×10 RG-POE-50-60W-MG (54.5)
	RG-RAP6262	• High-Perf. Outdoor Access Point • AX3000 Dual Band WiFi 6 w/ 5× Int. Omni-Ant. (2.4 GHz: 3 dBi, 5 GHz: 4 dBi) • 1× GbE PoE+ Port, 1× SFP Port • 512 max clients (110 recommended) • WebUI/Cloud/App management • PoE+ 802.3at @ 24 W or DC 12 V / 2 A (Power separate), IP68 • 3-year warranty	 ×10 RG-POE-AT30 (30)
	RG-RAP62-OD	• Indoor/Outdoor Versatile Access Point • AX3000 Dual Band WiFi 6 w/ 5× Int. Omni-Ant. (2.4 GHz: 4 dBi, 5 GHz: 6.5 dBi) • 1× GbE PoE+ Port • 512 max clients (110 recommended) • WebUI/Cloud/App management • PoE+ 802.3at @ 16 W, IP65 • 3-year warranty	
	RG-RAP73HD	• High Density Ceiling Mounted Access Point • BE19000 Tri-Band WiFi 7 w/ 14× Int. Omni-Ant. (2.4 GHz: 4 dBi, 5 GHz: 6 dBi, 6 GHz: 6 dBi) • 1× 10GbE PoE++, 1× GbE, 1× SFP+ • 1500 max clients (200 recommended) • PoE++ 802.3be @ 60 W or DC 48 V / 1.25 A (Power separate) • 3-year warranty	 ×10 RG-POE-50-60W-MG (54.5)
	RG-RAP73PRO	• Ceiling Mounted Access Point • BE14000 Tri-Band WiFi 7 with 8× Int. Omni-Ant. (2.4 GHz: 3.6 dBi, 5 GHz: 5.9 dBi, 6 GHz: 5.2 dBi) • 1× 2.5GbE PoE+ Port, 1× SFP+ Slot • 600 max clients (200 recommended) • WebUI/Cloud/App management • PoE+ 802.3bt @ 30 W or DC 54 V / 0.55 A, IP41 • 3-year warranty	
	RG-RAP72-Wall	• Wall Plate Access Point • BE3600 Dual Band Wi-Fi 7 with 5× Int. (2.4 GHz / 5 GHz: 3 dBi / 3 dBi) • 1× 2.5GbE (PoE+ 802.3at @ 30 W) • 4× GbE (1× PSE) • 512/110 max / rec clients • WebUI / Cloud / App management • IP41	

Smart Mesh Router			
	Model	Description	Accessory
	RG-E4	- AX3000 Dual Band Smart WiFi 6 with 5× Ext. Omni-Ant. - MU-MIMO 2 × 2 Streams, 3000 ft² max coverage 192 max clients (60 recommended) - WebUI/Cloud/App management - DC 12 V / 1.5 A, 18 W 3-year warranty	
	RG-E5	- AX3200 Dual Band WiFi 6 with 8× Ext. Omni-Ant. 3000 ft² max coverage 192 max clients (60 recommended) - WebUI/Cloud/App management - DC 12 V / 2.5 A, 36 W 3-year warranty	
	RG-E6	- AX6000 Dual Band Smart WiFi 6 with 8× Ext. Omni-Ant. - MU-MIMO 4 × 4 Streams, 3000 ft² max coverage 512 max clients (60 recommended) 2.5 GbE WAN - WebUI/Cloud/App management - DC 12 V / 3 A, 36 W 3-year warranty	
	RG-R6 (1-Pack)	- AX3200 Dual Band WiFi 6 with 4× Int. Omni-Ant. 3000 ft² max coverage 192 max clients (60 recommended) - WebUI/Cloud/App management - DC 12 V / 2.5 A, 30 W 3-year warranty	
	RG-R6-2 (2-Pack)	- AX3200 Dual Band WiFi 6 with 4× Int. Omni-Ant. 3000 ft² max coverage 192 max clients (60 recommended) - WebUI/Cloud/App management - DC 12 V / 2.5 A, 30 W 3-year warranty	




Wi-Fi Standard	Speed
Dual-Band AX3000	2.4 Ghz: 574 Mbps, 5 Ghz: 2402 Mbps
Dual-Band AX6000	2.4 Ghz: 574 Mbps, 5 Ghz: 4804 Mbps
Dual-Band BE3600	2.4 Ghz: 688 Mbps, 5 Ghz: 2882 Mbps
Dual-Band BE5040	2.4 Ghz: 688 Mbps, 5 Ghz: 4323 Mbps
Tri-Band BE14000	2.4 Ghz: 688 Mbps, 5 Ghz: 4323 Mbps, 6 Ghz: 8646 Mbps
Tri-Band BE19000	2.4 Ghz: 1376 Mbps, 5 Ghz: 5764 Mbps, 6 Ghz: 11528 Mbps

Wireless Bridge			
	Model	Description	Accessory
	RG-EST100-E	- Wireless Bridge (2-pack), 500 m range, 70°H, 70°V 2.4 GHz Dual-stream 300 Mbps WiFi 5 with 2× 8 dBi beam-ant. 1× Passive PoE FE port, 1× FE Port - IP55, 6KV lightning protection - WebUI/Cloud/App management 24 V Passive PoE @ 5 W, 12 V / 0.5 A DC 3-year warranty	
	RG-EST310-V2	- Wireless Bridge (2-pack), 1 km range, 60°H, 30°V 5 GHz Dual-stream 867 Mbps WiFi 5 with 2× 10 dBi beam-ant. 1× Passive PoE FE port - IP54, 4KV lightning protection - WebUI/Cloud/App management 24 V Passive PoE @ 7 W, 12 V / 1 A DC 3-year warranty	

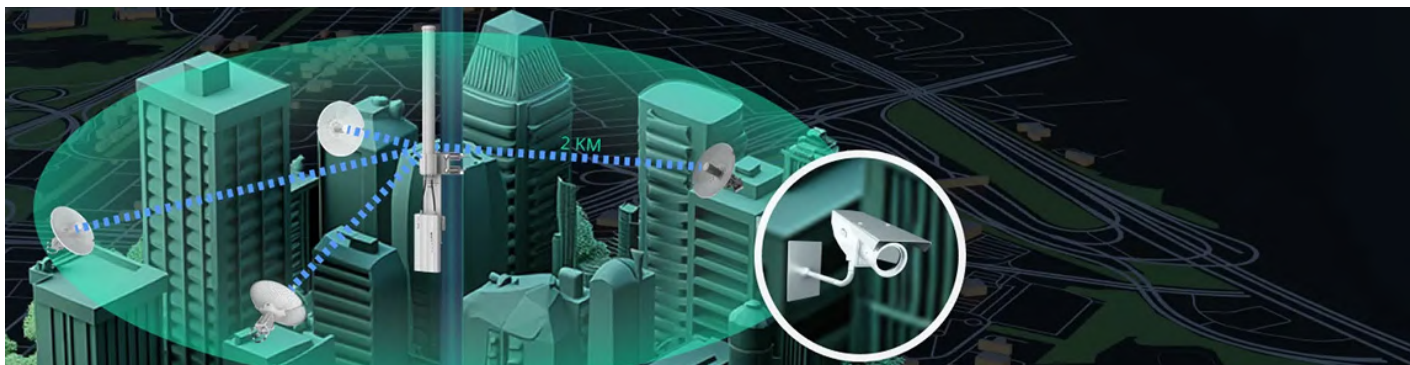

RG-EST350-V2

- Wireless Bridge (2-pack), 5 km range, 31°H, 14°V
- 5 GHz Dual-stream 867 Mbps WiFi 5 with 2× 15 dBi beam-ant.
- 1× Passive PoE GbE port, 1× GbE Port
- IP54, 4KV lightning protection
- WebUI/Cloud/App management
- 24 V Passive PoE @ 9 W, 12 V / 1 A DC
- 3-year warranty



RG-AirMetro460G

- Reyee AirMetro CPE, 15 km range
- 5 GHz Dual Stream 867 Mbps
- Wi-Fi 5 w/ 15 dBi beam-ant
- 9°H, 9°V
- 1× GbE (24 V Pass. PoE @ 12 W)
- IP65



RG-AirMetro550G-B

- Reyee AirMetro Wireless Bridge Station
- 2× SMA @ 5 GHz
- Wi-Fi 5 (867 Mbps, 2×2 MIMO)
- Int. 2.4 GHz Wi-Fi 4 3 dBi Ant. (150 Mbps, 1×1)
- 1:32 PTMP via TDMA
- 2× GbE (1×24 V Pass. PoE @ 12 W)
- IP55



RG-ANT13-360

- Reyee AirMetro 360° Omnidirectional Antenna for RG-AirMetro550G-B
- 2 km Range
- 13 dBi 5 GHz Cylindrical Antenna
- 360°H, 7°V
- 2× SMA
- IP55



RG-ANT20S-90

- Reyee AirMetro 90° Sector Antenna for RG-AirMetro550G-B
- 10 km Range
- 20 dBi 5 GHz Panel Antenna
- 90°H, 7°V
- 2× SMA
- IP55

Networking Switch

	Model	Description	Accessory
	RG-ES206GS-P	• 6-Port GbE Smart PoE+ Switch • 4× GbE PoE+ Ports, 1× 1G Combo Uplink Port, 1× GbE Uplink Ports • 54 W 802.3at PoE+ budget • Fanless, Desktop Steel Case • WebUI/Cloud/App management • 3-year warranty	
	RG-ES209GC-P	• Smart Layer 2 • 8× GbE (8× PoE+) • 1× GbE Uplink • 120 W 802.3at PoE+ Budget • Fanless, Desktop • 3-year warranty	

Networking Switch			
	Model	Description	Accessory
	RG-ES210GS-P	• 10-Port GbE Smart PoE+ Switch • 8× GbE PoE+ Ports, 1× 1G Combo Uplink Port, 1× GbE Uplink Port • 120 W 802.3at PoE+ budget • Fanless, Desktop Steel Case • WebUI/Cloud/App management • 3-year warranty	
	RG-ES220GS-P	• 20-Port GbE Smart PoE+ Switch • 16× GbE PoE+ Ports, 2× SFP Uplink Slots, 2× GbE Uplink Ports • 240 W 802.3at PoE+ budget • Single-fan, 13-inch 1U Rack-mountable Steel Case • WebUI/Cloud/App management • 3-year warranty	
	RG-ES228GS-P	• 28-Port GbE Smart PoE+ Switch • 24× GbE PoE+ Ports, 2× SFP Uplink Slots, 2× GbE Uplink Ports • 370 W 802.3at PoE+ budget • Single-fan, 1U Rack-mountable Steel Case • WebUI/Cloud/App management • 3-year warranty	
	RG-NBS3100-8GT2SFP	• 8-Port GbE L2 Managed Switch • 8× GbE Ports, 2× SFP Slots • Fanless, Rack-mountable Desktop Steel Case • WebUI/Cloud/App management • 5-year warranty	
	RG-NBS3100-8GT2SFP-P-V2	• 8-Port GbE L2 Managed PoE+ Switch • 8× GbE PoE+ Ports, 2× SFP Slots • 125 W 802.3at PoE+ budget • Fanless, Rack-mountable Desktop Steel Case • WebUI/Cloud/App management • 5-year warranty	
	RG-NBS3100-24GT4SFP	• Managed L2 Switch • 24× GbE • 4× SFP Uplink • Non-PoE • Fanless, Rackmount • 5-year warranty	
	RG-NBS3200-24GT4XS	• 24-Port L2+ Managed 10G Switch • 24× GbE Ports, 4× SFP+ Slots • Single-fan, 1U Rack-mountable Steel Case • WebUI/Cloud/App management • 5-year warranty	
	RG-NBS3200-24GT4XS-P	• 24-Port GbE L2+ Managed PoE+ 10G Switch • 24× GbE PoE+ Ports, 4× SFP+ Slots • 370 W 802.3at PoE+ power budget • Dual-fan, 1U Rack-mountable Steel Case • WebUI/Cloud/App management • 5-year warranty	
	RG-NBS3200-24SFP/8GT4XS	• 24-Port SFP L2+ Managed 10G Switch • 24× SFP Slots, 8× GbE Combo Ports, 4× SFP+ Slots • Single-fan, 1U Rack-mountable Steel Case • WebUI/Cloud/App management • 5-year warranty	

Networking Switch

	Model	Description	Accessory
	RG-NBS3200-48GT4XS	• 48-Port L2+ Managed 10G Switch • 48× Gigabit RJ45 Ports, 4× SFP+ Slots • Single-fan, 1U Rack-mountable Steel Case, Static Routing • WebUI/Cloud/App management • 5-year warranty	
	RG-NBS3200-48GT4XS-P	• 48-Port L2+ Managed PoE+ 10G Switch • 48× GbE PoE+ Ports, 4× SFP+ Slots • 370 W PoE Power budget • Single-fan, 1U Rack-mountable Steel Case • WebUI/Cloud/App management • 5-year warranty	
	RG-NBS3300-16MG4XS-HP	• 16-Port 10GbE L2+ Managed PoE+ Switch • 16× 2.5GbE (4× PoE++, 12× PoE+) Ports, 4× SFP Slots+ • 370 W 802.3bt PoE++ budget, • Dual-fan, 1U Rack-mountable Steel Case • WebUI/Cloud/App management • 5-year warranty	
	RG-NBS3300-8MG2XS-P	• 8-Port 10GbE L2+ Managed PoE+ Switch • 8× 2.5GbE PoE+ Ports, 2× SFP+ Slots • 240 W 802.3at PoE+ budget • Dual-fan, Rack-mountable Desktop Steel Case • WebUI/Cloud/App management • 5-year warranty	
	RG-NBS5200-24GT4XS	• 24-Port L3 Managed 10G Switch • 24× GbE Ports, 4× SFP+ Slots • Single-fan, 1U Rack-mountable Steel Case • WebUI/Cloud/App management • 5-year warranty	
	RG-NBS5200-24GT4XS-P	• 24-Port GbE L3 Managed PoE+ 10G Switch • 24× GbE PoE+ Ports, 4× SFP+ Slots • 370 W 802.3at PoE+ power budget • Dual-fan, 1U Rack-mountable Steel Case • WebUI/Cloud/App management • 5-year warranty	
	RG-NBS5200-24SFP/8GT4XS	• 24-Port SFP L3 Managed 10G Switch • 24× SFP Slots, 8× GbE Combo Ports, 4× SFP+ Slots • Single-fan, 1U Rack-mountable Steel Case • WebUI/Cloud/App management • 5-year warranty	
	RG-NBS5200-48GT4XS	• 48-Port L3 Managed 10G Switch • 48× Gigabit RJ45 Ports, 4× SFP+ Slots • Single-fan, 1U Rack-mountable Steel Case, Static Routing • WebUI/Cloud/App management • 5-year warranty	
	RG-NBS5200-48GT4XS-UP	• 48-Port L3 Managed PoE+ 10G Switch • 8× PoE++ GbE Ports, 40× GbE PoE+ Ports, 4× SFP+ ports • Fixed single AC power supply, 740 W 802.3bt PoE++ budget • 3 Fan, 1U Rack-mountable Steel Case, Static Routing • WebUI/Cloud/App management • 5-year warranty	

Networking Switch			
	Model	Description	Accessory
	RG-NBS5300-8MG2XS-UP	• 8-Port MG L3 Managed PoE++ Switch • 8× 2.5 GbE PoE++ Ports, 2× SFP+ Slots • 370 W 802.3bt PoE++ budget • Dual-fan, Rack-mountable Desktop Steel Case • WebUI/Cloud/App management • 5-year warranty	
	RG-NBS5500-12XS	• 12-Port SFP L3 Managed 10G Switch • 12× SFP+ Slots, 1× GbE MGMT Port • Dual-fan, Rack-mountable Desktop Steel Case • WebUI/Cloud/App management • 5-year warranty	
	RG-NIS2100-4GT2SFP-HP	• 4-Port Industrial Smart Managed PoE+ Switch • 1× GbE PoE++ Port, 3× GbE PoE+ Ports, 2× SFP Uplink Ports • 108~180 W 802.3bt PoE+ budget • IP40 • Fanless, DIN Rail Mounted • WebUI/Cloud/App management • 5-year warranty	
	RG-NIS2100-8GT2SFP-HP	• 8-Port Industrial Smart Managed PoE+ Switch • 1× GbE PoE++ Port, 7× GbE PoE+ Ports, 2× SFP Uplink Ports • 228~300 W 802.3bt PoE+ budget • IP40 • Fanless, DIN Rail Mounted • WebUI/Cloud/App management • 5-year warranty	
	RG-NIS3100-4GT2SFP-HP	• 4-Port Industrial L2 Managed PoE+ Switch • 4× GbE PoE+ Ports, 2× SFP Uplink Ports • 120 W 802.3at PoE+ budget • IP40 • Fanless, DIN Rail Mounted • WebUI/Cloud/App management • 5-year warranty	
	RG-NIS3100-8GT2SFP-HP	• 8-Port Industrial L2 Managed PoE+ Switch • 8× GbE PoE+ Ports, 2× SFP Uplink Ports • 240 W 802.3at PoE+ budget • IP40 • Fanless, DIN Rail Mounted • WebUI/Cloud/App management • 5-year warranty	
	RG-NIS3100-8GT4SFP-HP	• 8-Port Industrial L2 Managed PoE+ Switch • 8× GbE PoE+ Ports, 4× SFP Uplink Ports • 240 W 802.3at PoE+ budget • IP40 • Fanless, DIN Rail Mounted • WebUI/Cloud/App management • 5-year warranty	



Stable Connectivity, Easy Management, Ready for Your Business

Designed for businesses of all sizes, Reyee switches offer a range of professional, reliable, and affordable switch models, from Layer 3 to unmanaged, suitable for scenarios including SOHO, CCTV, offices, hotels, factories, and streets. Reyee-managed switches can connect and manage different devices such as access points, IPCs, and printers. Empowered by Ruijie Cloud, you can simplify device management and maintenance, saving time and effort while boosting efficiency.

Business Router & Others			
	Model	Description	Accessory
	RG-EG105GW-X	• AX3000 Dual Band WiFi 6 with 5× Ext. Omni-Ant. • 1.2 Gbps Throughput • 1× GbE WAN Port, 1× GbE LAN Port, 3× GbE LAN/WAN ports • 110 max clients (80 recommended) • WebUI/Cloud/App management • 20 W • 3-year warranty	
	RG-EG1510XS	• 10-Port Wired Business Router, 4 Gbps Throughput • 1× 2.5 GbE WAN Port, 2× SFP+ WAN/LAN Slots, 3× 2.5 GbE WAN/LAN Port, 3× GbE WAN/LAN Port, 1× GbE LAN Port • 1500 client capacity • Fanless, Rack-mountable 1U Steel case • WebUI/Cloud/App management • 3-year warranty	
	RG-EG209GS	• 9-Port Wired Business Router, 600 Mbps Throughput • 1× SFP WAN/LAN Slot, 1× GbE WAN Port, 2× GbE WAN/LAN Ports, 5× GbE LAN ports • 200 client capacity • Fanless, Desktop Steel Case • WebUI/Cloud/App management • DC 12 V / 1.5 A, 18 W, IP20 • 3-year warranty	
	RG-EG310GH-P-E	• 10-Port Wired PoE+ Business Router, 1.5 Gbps Throughput • 1× GbE WAN Port, 1× GbE WAN/LAN Port, 2× GbE WAN/LAN PoE+ Ports, 6× GbE PoE+ LAN ports • 300 client capacity • WebUI/Cloud/App management • 110 W PoE+ 802.3at Budget, DC 54 V / 2.4 A, 130 W, IP20 • 3-year warranty	

Rcycc Cloud-Managed Routers

Intelligent business routers, tailored for diverse scenarios, enhance connectivity and ensure seamless Internet access.



Why Reyyee Routers?

All-in-One Router, Affordable and Enjoyable for Everyone

Featuring flexible concurrency, high throughput, and reliable performance, these routers offer enhanced capabilities like load balancing, smart QoS, Easy VPN, captive portal, NAT traversal, syslog storage extension, unified authentication, mesh technology, SD-WAN for multi-branch setups, third-party integration, and lifetime free cloud management. These features meet the needs of CCTV, enterprise, SOHO, retail, restaurants, coffee shops, and hotels.





We cover security and comfort, fire safety, water-leak prevention and video surveillance.
All automated and integrated.

Ajax Hub 2 Plus with SIM

	Model	Description
 Hub 2 Plus Jeweller	● 72010.40.BL3	- Ethernet, Wi-Fi, two SIM cards (2G/3G/4G) - Max. 6500 ft. (5570 ft. photo) range - Swappable PSU board 3Ah built-in battery backup - IP20, UL Rated, 0°C to +49°C, 90% RH - Max. 5 range extenders - Max. 200 devices in 25 security groups - Max. 64 scenarios
	○ 72011.40.WH3	
		- Free over-the-air software updates - Supports detectors with photo verification - Anti-sabotage (tamper, spoof, jam, etc.) - Max. 100 cameras or DVRs - Max. 200 users - Built in backup-battery, 15 hrs. max runtime - App enabled control and setup via QR code

Wireless Siren

	Model	Description
 HomeSiren Jeweller	● 42808.11.BL3	- Wireless siren with LED connector - Adjustable volume: 80 dB to 98 dB - External LED connector - Remote control and setup via apps - Adjustable alarm duration: 3 to 180 s
	○ 42809.11.WH3	
		- Door opening notification - Effortless installation and replacement - Connecting via QR code
 StreetSiren Jeweller	● 42844.07.BL3	- Wireless siren with LED frame - Adjustable volume: 80 dB to 98 dB - IP54 protection class - Remote control and setup via apps - Adjustable alarm duration: 3 to 180 s
	○ 42845.07.WH3	
		- Door opening notification - Effortless installation and replacement - Connecting via QR code
 StreetSiren DoubleDeck w/ Brandplate	● 42846.61.BL3	- StreetSiren DoubleDeck with Brandplate - Adjustable volume: 80 dB to 98 dB - IP54 protection class - Remote control and setup via apps - Adjustable alarm duration: 3 to 180 s
	○ 42847.61.WH3	
		- Door opening notification - Effortless installation and replacement - Connecting via QR code
 Brandplate	● 42791.63.BL	- Branding StreetSiren Double Deck faceplate - Quick installation - Reliable fastening during stormy winds - Permanent advertising
	○ 42792.63.WH	

Water and Fire Safety

	Model	Description
 LeakProtect Jeweller	● 42817.08.BL3 ○ 42818.08.WH3	• Wireless addressable flood detector • 4 pairs of contacts for detecting flood • Tool-free installation and replacement • Fast connection via QR code • Communication with hub up to 1300 m
		• Detects water leaks 24/7/365 • Up to 5 years of operation on batteries • Adjustable polling interval • Remote control and configuring via app
 WaterStop Jeweller	● 65150.155.BL3 ○ 65149.155.WH3	• Remotely controlled water shutoff valve • Automation triggered by leak alarm • Stuck prevention adjustable up to 1 week • RuB valve DN15, DN20, or DN25 provided • Up to 3 years of operation on batteries • Remote control and configuring via app
		• Water shut-off controlled by button and lever • Device-hub/extender radio range w/o obstacles • Mounting lockers • Optional 9-12 V DC, 2A power supply • Pairing with the system via QR code
 LifeQuality Jeweller	● 57536.135.BL3 ○ 57537.135.WH3	• Smart air quality detector • Detailed statistics of indicators in apps • Notification of indicators exceeding the limits • Up to 2.5 years of operation from batteries • Remote control and setup via apps
		• Automation scenarios • LED indication of the CO2 level • SmartBracket mounting panel • Adding to the system via QR code
 FireProtect 2 (Heat/Smoke/CO) Jeweller	● 68698.137.BL3 ○ 68697.137.WH3	• Wireless combined heat and smoke sensors • Replaceable batteries • Built-in Siren • IP20
 FireProtect 2 (Heat/Smoke) Jeweller	● 68696.136.BL3 ○ 68695.136.WH3	• Double-spectrum optical smoke sensor • Temperature sensor triggers above 135 °F • Built-in interconnected siren, 85 dB @ 9 ft. • Max. 5500 ft. to Hub 2 Plus/ReX/ReX 2 • 2× CR123A, up to 5 years
		• IP20, 32° - 100.4 °F, up to 85% RH • Anti-sabotage (tamper, spoof, jam, etc.) • Free over-the-air software updates • App enabled control and setup via QR code • UL 268, CAN/ULC S529 compliance

Wireless Touch Keypads

	Model	Description
 KeyPad Jeweller	● 42813.12.BL3 ○ 42814.12.WH3	• Wireless touch keypad • Max. 5500 ft. to Hub 2 Plus/ReX/ReX 2 • Max. 200 personal passcodes & duress codes • Max. 99 guest codes
		• Fully wireless, powered by 4 x AA • Anti-sabotage (passcode guessing, tamper, etc.) • Free over-the-air software updates • App enabled control and setup via QR code
 KeyPad Plus Jeweller	● 42815.83.BL3 ○ 42816.83.WH3	• All features of KeyPad plus RFID card reader • Integrated speaker with sound alerts • DESFire® EV1, EV2, ISO14443-A (13.56 MHz)
		• Card auditing with alerts for invalid reads • Stylish branded cards and fobs available
 KeyPad TouchScreen Jeweller	● 58472.148.BL3 ○ 58473.148.WH3	• All features of KeyPad Plus (except power req.) • 5" Full touchscreen controls • 6 x AA backup only, 12 V DC 0.4 A required
		• Detailed reporting of alerts and issues • Management & control of system & user settings • Auto screen wakeup

Wireless Indoor Motion Detectors			
	Model	Description	
 MotionProtect Jeweller	● 42822.09.BL3 ○ 42823.09.WH3	• Up to 12 m detection distance • Pet immunity • False alarms prevention algorithm • Remote control and setup via app • 88.5°/ 80° viewing angles • Temperature compensation • Effortless installation and replacement • Connecting via QR code	
 MotionProtect Curtain Jeweller	● 42824.36.BL3 ○ 42825.36.WH3	• Up to 15 m detection distance • 6°/ 90° viewing angles • Temperature compensation • False alarms prevention algorithm • Remote control and setup via app • IP54 enclosure protection • Effortless installation and replacement • Connecting via QR code • Up to 1700 m of 2-way wireless communication	
 MotionProtect Plus Jeweller	● 42827.02.BL3 ○ 42828.02.WH3	• Up to 12 m detection distance • 88.5°/ 80° viewing angles • Temperature compensation • False alarms prevention algorithm • Remote control and setup via app • Thermal interference filter • Additional K-band microwave sensor • Effortless installation and replacement • Connecting via QR code • Up to 1700 m of 2-way encrypted communication • Pet immunity	
 MotionCam Jeweller	● 42819.23.BL3 ○ 42820.23.WH3	• Up to 12 m detection distance • 88.5°/ 80° viewing angles • Temperature compensation • False alarms prevention algorithm • Remote control and setup via app • Pet immunity • A built-in camera for photo verification • Effortless installation and replacement • Connecting via QR code	
 MotionCam (PhOD) Jeweller	● 57539.120.BL3 ○ 57538.120.WH3	• Up to 12 m detection distance • 88.5°/ 80° viewing angles • Temperature compensation • False alarms prevention algorithm • Remote control and setup via app • Pet immunity • A built-in camera for photo verification • Effortless installation and replacement • Connecting via QR code	
 DoorProtect Jeweller	● 42797.03.BL3 ○ 42798.03.WH3	• Wireless door opening detector • Built-in accelerometer detects shock and tilt • False alarm prevention • Up to 7 years of operation on battery • Remote control and setup via apps • Adjustable tilt angle for alarm triggering • Addition NC input for detector • Up to 1200 m of 2-way communication • Pairing via QR code	
 DoorProtect Plus Jeweller	● 42799.21.BL3 ○ 42800.13.WH3	• Wireless door opening detector • Built-in accelerometer detects shock and tilt • False alarm prevention • Up to 5 years of operation on battery • Remote control and setup via apps • Adjustable tilt angle for alarm triggering • Addition NC input for detector • Up to 1200 m of 2-way communication • Pairing via QR code	
 GlassProtect Jeweller	● 42804.05.BL3 ○ 42805.05.WH3	• Wireless indoor glass break detector • Up to 9 m glass break detection • 180° horizontal detection angle • Filter for false alarms • Configuring in Ajax mobile and desktop apps • Two-factor glass break verification algorithm • Additional NC input • Up to 1000 m of 2-way encrypted communication • Pairing with the system via QR code	
 CombiProtect Jeweller	● 42795.06.BL3 ○ 42796.06.WH3	• Wireless motion & glass break detector • Up to 1200 m of radio communication • Encryption and device authentication • Up to 5 years of operation • Pre-installed replaceable battery • Remote control and configuration in app • Effortless installation and maintenance • Pairing with the system via QR code • Low battery warning	

Wireless Outdoor Motion Detectors

	Model	Description
 Curtain Outdoor Jeweller	○ 101442.289.WH3	• Curtain motion detector for outdoor/indoor • Wireless dual-technology • Hood included • 3 modes (Near, far, and immunity) • IP55
 DualCurtain Outdoor	○ 42803.81.WH3	• DualCurtain Outdoor • Independent detection zone for each side • Up to 4 years of operation from batteries • Optional near area detection • Anti-masking protection • Up to 1700 m communication distance • Pet immunity
 MotionCam Outdoor	○ 42821.84.WH3	• Up tp 15 m motion detection range • Advanced pet immunity • Up to 3 years of ooperation from batteries • Night vision • Anti-masking system • Communication with hub up to 1700 m
 MotionProtect Outdoor Jeweller	○ 42826.33.WH3	• Up tp 15 m motion detection range • Advanced pet immunity • Up to 5 years of ooperation from batteries • False alarm prevention • Intelligent anti-masking system • Tamper alarm • Communication with hub up to 1700m
 MotionCam Outdoor (PhOD) Jeweller	○ 57540.121.WH3	• PIR motion detector • Up tp 15 m detection range • Pet immunity • False alarms prevention algorithm • Effortless installation and replacement • Remote control and setup via app • Anti-masking system • Temperature comrensation • Built-in camera for photo verification • Up to 3 years of operation on battery • Connecting via QR code
 Hood	○ 42810.60.WH	• Hood for outdoor motion detector

Range Extenders

	Model	Description
 ReX	● 42838.37.BL3 ○ 42839.37.WH3	• ReX UPC • Frequency hopping against jamming • Up to 35 hrs on back-up battery • Fast connection with QR code • Tampering alarm for lid protection • Over-the-air updates • Remote control and setup via apps • Communication range up to 1800 m
 ReX 2 Jeweller	● 42840.106.BL3 ○ 42841.106.WH3	• ReX 2 UPC • Two channels to transmit events • Up to 38 hrs battery ooperation • Fast connection with QR code • Enclosure protected with the tamper • Over-the-air updates • Remote control and setup via apps • Communication range up to 1700 m

Others		
	Model	Description
 Ajax Pass	● 42833.89.BL ○ 42836.89.WH	• Pass (3 pcs)
 Ajax Pass	● 42832.89.BL ○ 42835.89.WH	• Pass (10 pcs)
 Ajax Pass	● 42831.89.BL ○ 42834.89.WH	• Pass (100 pcs)
 Ajax Tag	● 42852.90.BL ○ 42853.90.WH	• Tag (3 pcs)
 Ajax Tag	● 42849.90.BL ○ 42851.90.WH	• Tag (10 pcs)
 Ajax Tag	● 42848.90.BL ○ 42850.90.WH	• Tag (100 pcs)
 Socket (Type B) Jeweller	● 88913.34.BL3 ○ 88912.34.WH3	• Wireless smart plug w/ power consumption monitor • NEMA 5-15 • IP20, 32°F - 167°F • 92 V/132 V min/max voltage protection • 15 A current protection • 1.5 W idle
 Ajax SpaceControl Jeweller	● 42842.04.BL3 ○ 42843.04.WH3	• Wireless key fob for Ajax system control
 Ajax DoubleButton	● 42801.79.BL3 ○ 42802.79.WH3	• Wireless hold-up device • Emergency button • Multiple methods of confirmation • Can trigger programmable automation • IP55

Others		
	Model	Description
 Button Jeweller	● 42793.26.BL3 ○ 42794.26.WH3	• Smart wireless alarm button
 Holder for Button/DoubleButton	● 42806.82.BL ○ 42807.82.WH	• Holder for Button/Double Deck
 MultiTransmitter	● 42829.62.BL3 ○ 42830.62.WH3	• MultiTransmitter • 18 inputs for third-party wired devices • Up to 400 m of cable length • 9 types of alarms for each connected device • 100 - 240 V, 50/60 Hz main power supply • Operating temperature -10°C to 40°C • IP50 ingress protection
 Transmitter Jeweller	42854.18.NC3	• Transmitter • 3.3 V DC power supply for a wired device • Connecting devices with NC/NO contact type • Fast connection with QR code • Supporting pulse or bistable mode • Selecting 1/8 types of wired device events • Remote control and setup via apps
 6 V PSU	42790.78.NC	• 6 V PSU for Hub 2/Hub 2 Plus/Rex 2
 12-24 V PSU	59580.94.NC	• 12-24 V PSU for Hub 2/Hub 2 Plus/ReX 2
 Relay Jeweller	42837.19.NC3	• Power relay to remotely control • 12 - 24 V DC power supply and appliances • Potential-free contacts • Up to 1000 m of communication with hub • Device is controlled via app • Executes automation scenarios • Operates in bistable or pulse mode • Pairing with a hub via QR code
 WallSwitch Jeweller	42855.13.BL3	• Power relay to remotely control • 110 - 230 V power supply and appliances • Allows checking electricity consumption • Up to 1000 m of communication with hub • Device is controlled via app • Executes automation scenarios • Operates in bistable or pulse mode • Pairing with a hub via QR code
 DIN Holder	● 62964.132.BL	• Bracket to fix Relay or WallSwitch in a DIN rail

Model

SG-009 *NEW*

Product Overview

SG-009 Hybrid Solar Powered Surveillance Trailer features an innovative 3-panel design using high-efficiency 435 W monocrystalline silicon panels, optimized for maximum performance even in low-sunlight areas. For added reliability, it includes a built-in DC gasoline generator with a fuel tank, offering up to 2 kW of power and a fixed 1.5 kW charging output. This dual-power system ensures continuous operation in any environment.

Product Specifications

- Solar Panel: Mono-Crystalline Silicon
- Telescopic Mast, Maximum Height: 22.9 ft
- 3× 435 W Solar Panel
- Lithium Iron Phosphate Battery, Capacity 25.6 V 460 Ah
- Ambient Temperature -35 C° ~ 60 C°
- Mobile Single Axle Trailer
- Hybrid System with DC Gasoline Generator, DC 25.6 V, 2 kW



Built-in Gasoline Generator

Model

SG-008 *NEW*

Product Overview

SG-008 Solar Powered Surveillance Trailer features a 2-panel design using high-efficiency 440 W monocrystalline silicon panels, optimized for maximum performance even in low-sunlight areas.

Product Specifications

- Solar Panel: Mono-Crystalline Silicon
- Telescopic Mast, Maximum Height: 22.9 ft
- 2x 440 W Solar Panel
- MPPT Solar Controller, 8.2 hr charging time
- Controller system voltage 24 V DC
- Ambient Temperature -30 C° ~ 60 C°
- Mobile Single Axle Trailer




Model

SGP-MAX3000P-V2 *NEW*

Product Specifications

- Outdoor Enclosure Pro
- 25.2 V 2.5 kWh Battery
- MPPT
- MPPT gateway included (PoE switch not included)
- 12 V 48 V output
- Red & Blue warning light

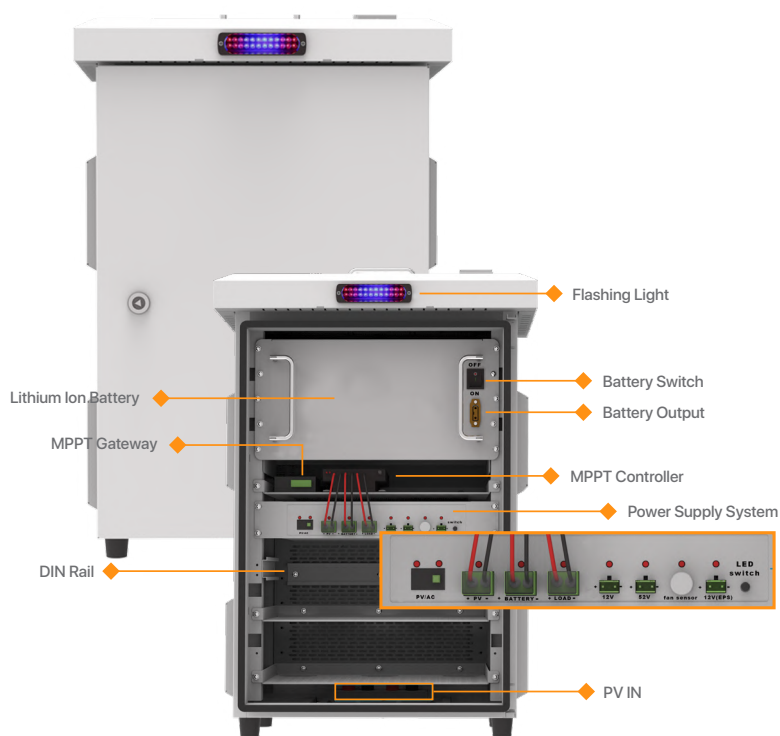

Model

SGA-AIR2000K

Product Specifications

- Surveillance Power Enclosure
- 110 V AC input
- 2× 110 V AC output socket
- 6KV surge protection
- Built-in fan with temperature control
- Red & Blue warning light



Model

SGA-AIR1000K

Product Specifications

- Surveillance Power Enclosure
- 110 V AC input
- 3× 110 V AC output socket
- 6KV surge protection
- Built-in fan with temperature control
- Red & Blue warning light

Model

SG-AGT001 **NEW**


Product Specifications

- Alarm Site Tower
- Single-crystal solar panel for efficient energy conversion
- Bracket designed for installing AJAX IP products
- Includes dedicated 12 V 80 A solar gel batteries
- Four sturdy bases for enhanced stability
- Elevated base design to effectively prevent water damage

Model

SGA-POLE-EX

- SG Pole extension arm 300 mm, support one IPC, one PTZ

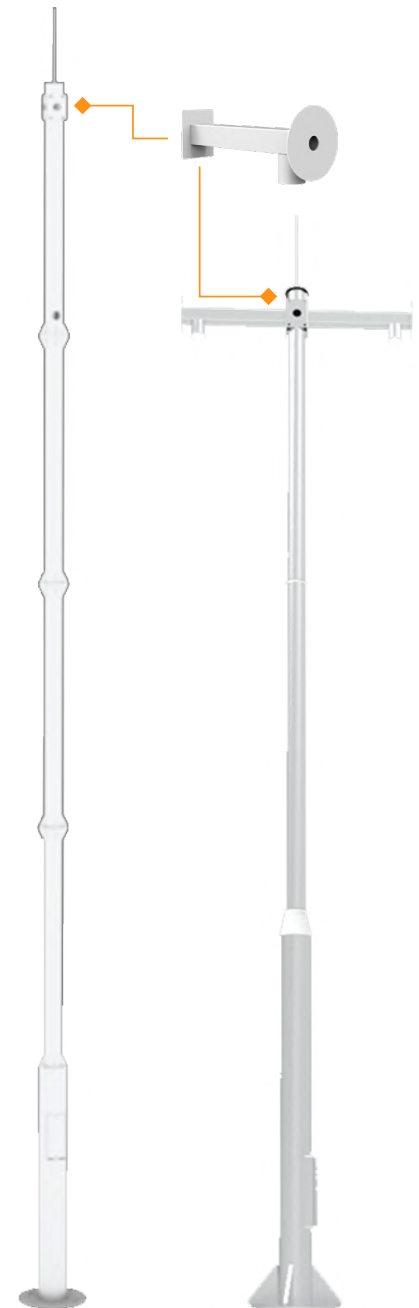

Model
SGP-POLE6

- 20 ft 5-section combination monitoring equipment pole

Model
SGA-POLE36

- 12 ft 3-section combination monitoring equipment pole

POE Switch and Accessories		
Model	Description	
	POE-0402M	6 Ports (4 PoE), 100 Mbps, 2 Uplink, at/af, 60 W, 820 ft
	POE-0802M	10 Ports (8 PoE), 100 Mbps, 2 Uplink, at/af, 96 W, 820 ft
	POE-1602G	18 Ports (16 PoE), 10/100 Mbps, 2 Gb Uplink, at/af, 150 W
	POE-2402G	26 Ports (24 PoE), 100 Mbps, 2 Uplink, 1 Gigabit, at/af, 250 W, 820 ft, Built-in Power
	POE-0402AG	PoE Switch, 6 Ports (4 PoE), 10/100/1000 Mbps, 2 Uplink (1 RJ45, 1 SFP), 60 W
	POE-0402AG-60 NEW	PoE Switch, 6 Ports (4 PoE), 10/100/1000 Mbps, 2 Uplink (1 RJ45, 1 SFP), 60 W (1st port max. 60 W)
	POE-0802AG	PoE Switch, 10 Ports (8 PoE), 10/100/1000 Mbps, 2 RJ45 Uplink, 110 W
	POE-0802AG-60 NEW	PoE Switch, 10 Ports (8 PoE), 10/100/1000 Mbps, 2 RJ45 Uplink, 110 W (1st port max. 60 W)
	POE-1602AG	PoE Switch, 18 Ports (16 PoE), 10/100/1000 Mbps, 2 SFP Uplink, 280 W
	POE-1602AG-60 NEW	PoE Switch, 18 Ports (16 PoE), 10/100/1000 Mbps, 2 SFP Uplink, 280 W (1st port max. 60 W)
	POE-2402AG	PoE Switch, 26 Ports (24 PoE), 10/100/1000 Mbps, 2 SFP Uplink, 380 W
	POE-2402AG-60 NEW	PoE Switch, 26 Ports (24 PoE), 10/100/1000 Mbps, 2 SFP Uplink, 380 W (1st port max. 60 W)
	POE-INJECT02	1CH PoE Injector, 10/100 Mbps, at, 328 ft, w/48 V, 1 A Power Adapter
	POE-INJECT04	1CH PoE Injector, 1 Gbps, 802.3af/at/bt, Up to 328ft, 60W
	POE-SPEX01	2 CH PoE Extender / Splitter, 10/100 Mbps, 328 ft / 820 ft
	POE-EXT03	1CH PoE Extender, 10/100 Mbps, af, Up to 328 ft
	POE-EXT03-OD	Outdoor PoE Extender, 1x10/100/1000Base-TX in, 2x10/100/1000Base-TX out
	POE-SPLT02	1CH PoE Splitter, 10/100 Mbps, af, 48 V in, 12 V / 1 A out
	POE-SFP100	SFP to RJ45 1000 Base-T, Cat5e/Cat6, 1000 BASE-T, 328ft

POC Accessories		
Model	Description	
	HD-EPOC101R	1CH EPOC (656 ft), RX, Accept 3 TX, w/ 53 V DC Power Adapter
	HD-EPOC101T-POE	1CH EPOC (656 ft), TX, PoE & 12 V DC out, Max 3 Cascading (328 ft ea.)
	EOC1002-1ET	Ethernet Over Coaxial transmitter
	EOC1002-1EC	Ethernet Over Coaxial receiver

Power Supplies		
Model	Description	
	CP360W-POE8P-B NEW	360 W One-Stop Uninterrupted Power Supply
	UPS-CR1K	Uninterruptible Power Supply, 1000 VA / 800 W, rack mounting
	UPS-1K9A	Uninterruptible Power Supply, 1000 VA / 1000 W, 3 Outlets
	UPS-K1200	Uninterruptible Power Supply, 1200 VA / 720 W, 2x 12 V, 7 AH battery
	CP12-5A-EG NEW	Access Control Power Box, 5A, 12-15 V DC adjustable output
	CP1204-5A	12 V DC, 4 CH Power Supply 5 A, PTC Fuse
	CP1204-5A-U	12 V DC, 4 CH Power Supply 5 A, PTC Fuse, UL Listed
	CP1208-16A-4K	12 V DC, 8 CH Power Supply, 16 A, PTC (Resettable 2A) Fuse
	CP1209-5A	12 V DC, 9 CH Power Supply 5 A, PTC Fuse
	CP1209-5A-U	12 V DC, 9 CH Power Supply 5 A, PTC Fuse, UL Listed
	CP1209-10A	12 V DC, 9 CH Power Supply 10 A, PTC Fuse
	CP1209-10A-U	12 V DC, 9 CH Power Supply 10 A, PTC Fuse, UL Listed
	CP1216-32A-4K	12 V DC, 16 CH Power Supply, 32 A, PTC (Resettable 2 A) Fuse
	CP1218-10A	12 V DC, 18 CH Power Supply 10 A, PTC Fuse
	CP1218-20A-1.5U	12 V DC, 18 CH Power Supply 20 A, 1.5 U Case, PTC Fuse
	CP1218-10A-U	12 V DC, 18 CH Power Supply 10 A, PTC Fuse, UL Listed
	CP1218-20A-U	12 V DC, 18 CH Power Supply 20 A, PTC Fuse, UL Listed
	CP1218-30A-U	12 V DC, 18 CH Power Supply 30 A, PTC Fuse, UL Listed
	CP2409-10A	24 V AC, 9 CH Power Box 10 A, PTC Fuse
	CP2418-10A	24 V AC, 18 CH, Power Supply 10 A, PTC Fuse
	CP2418-10A-1.5U	24 V AC, 18CH Power Supply 10 A, 1.5U Case, PTC Fuse
	CP1000	12 V DC, 1 A Adapter, UL
	CP2000-H	12 V DC, 2 A Adapter, UL
	CP5000-H	12 V DC, 5 A Adapter, UL

	CP5000-T	12 V DC, 4 CH, 5A Adapter, UL
	CP1524	24 V DC, 1.5A, Transformer, UL
	CP2420	24 V AC, 20 VA Transformer, UL
	CP2440	24V AC, 40 VA Transformer, UL
	EL-05	Power Strips, 4 Ports, 2 USB, 6 ft retractable Cable 10 A, UL Listed
	EL-08	Power Strips, 8 Ports, 3 USB (1 USB-C), 4 ft, 10 A, UL Listed
	EL-10	Power Strips, 5 Ports, 3 USB, 4 ft, 10 A, UL Listed
	EL-100	Power Strips, 10 Ports, 3 USB (1 USB-C), 4 ft, 13 A, UL Listed

Network Cable			
Model	Description		
	CAT5E-W	Cat5e Network Cable, BC 1000 ft, White	○
	CAT5E-BLACK	Cat5e Network Cable, BC 1000 ft, Black	●
	CAT5E-G	Cat5e Network Cable, BC 1000 ft, Grey	●
	CAT5E-BLU	Cat5e Network Cable, BC 1000 ft, Blue	●
	CAT5E-OD	Cat5e Network Cable, BC 1000 ft, Outdoor Rated	
	CAT5E-DB	Cat5e Network Cable, BC 1000 ft, Direct Burial, UL	
	CAT5E-G-2	Cat5e Network Cable, CCA 1000 ft, Grey	●
	CAT5E-W-2	Cat5e Network Cable, CCA 1000 ft, White	○
	CAT5E-BLU-2	Cat5e Network Cable, CCA 1000 ft, Blue	●
	CAT6-W	Cat6e Network Cable, BC 1000 ft, White	○
	CAT6-BLACK	Cat6e Network Cable, BC 1000 ft, Black	●
	CAT6-BLUE	Cat6e Network Cable, BC 1000 ft, Blue	●
	CAT6-YELLOW	Cat6e Network Cable, BC 1000 ft, Yellow	●
	CAT6-OD	Cat6 Network Cable, BC 1000 ft	
	CAT6-DB	Cat6e Network Cable, BC 1000 ft, Direct Burial	
	CAT6-W-P	Cat6 CMP, UL 1000 ft	○

	CAT6-W-2	Cat6e Network Cable, CCA 1000 ft	○
	CC6300-3-G	Cat5e Network Patch Cable 3 ft	●
	CC6300-6-G	Cat5e Network Patch Cable 6 ft	●
	CC6300-10-G	Cat5e Network Patch Cable 10 ft	●
	CC6400-50-G	Premade Cat5e Network Patch Cable, CCA 50 ft	●
	CC6400-50	Premade Cat5e Network Patch Cable, CCA 50 ft	○
	CC6400-100-G	Premade Cat5e Network Patch Cable, CCA 100 ft	●
	CC6600-1	Premade Cat6 Ethernet Cable, 1 ft	
	CC6600-2 NEW	Premade Cat6 Ethernet Cable, 2 ft	
	CC6600-3	Premade Cat6 Ethernet Cable, 3 ft	
	CC6600-5	Premade Cat6 Ethernet Cable, 5 ft	
	CC6600-6	Premade Cat6 Ethernet Cable, 6 ft	
	CC6600-10	Premade Cat6 Ethernet Cable, 10 ft	
	CC6600-15	Premade Cat6 Ethernet Cable, 15 ft	
	CC6600-25 NEW	Premade Cat6 Ethernet Cable, 25 ft	
	CC6600-50 NEW	Premade Cat6 Ethernet Cable, 50 ft	
	CC6600-100 NEW	Premade Cat6 Ethernet Cable, 100 ft	

Coaxial Cable			
Model	Description		
	CW59W-1000	Coaxial, RG59U for POC Camera, 1000 ft	○
	CW5918B	Siamese, RG59U, 95%, 18/2, BC, UL, 500 ft, Black	●
	CW5918W	Siamese, RG59U, 95%, 18/2, BC, UL, 500 ft, White	○
	CW5918B-2	Siamese, RG59U, 95%, 18/2, CCA, UL, 500 ft, Black	●
	CW5918W-2	Siamese, RG59U, 95%, 18/2, CCA, UL, 500 ft, White	○
	CW5918W-1000	Siamese, RG59U, 95%, 18/2, BC, UL, 1000 ft, White	○
	CW5918B-1000	Siamese, RG59U, 95%, 18/2, BC, UL, 1000 ft, Black	●

	CW5918W-2-1000	Siamese, RG59U, 95%, 18/2, BC, UL, 1000 ft, White	○
	CW5918B-2-1000	Siamese, RG59U, 95%, 18/2, BC, UL, 1000 ft, Black	●
	CC6200-1	Coax. Patch Cord, BNC, 1 ft	●
	CC6200-2	Coax. Patch Cord, BNC, 2 ft	●
	CC6200-5	Coax. Patch Cord, BNC, 5 ft	●
	CC6200-10	Coax. Patch Cord, BNC, 10 ft	●
	CC7600-B-T	Coax. Premade Cable, BNC, 60 ft, Black	●
	CC7600-W-T	Coax. Premade Cable, BNC, 60 ft, White	○
	CC7700-W-T	Coax. Premade Cable, BNC, 100 ft	○
HDMI			
	Model	Description	
	HDMI-C06	HDMI Cable, 1080P & 4K, 6 ft	
	HDMI-C15	HDMI Cable, 1080P & 4K, 15 ft	
	HDMI-C25	HDMI Cable, 1080P & 4K, 25 ft	
	HDMI-C50	HDMI Cable, 1080P & 4K, 50 ft	
	HDMI-CF98	HDMI Fiber Cable, 1080P & 4K 98 ft	
	HDMI-CF164	HDMI Fiber Cable, 1080P & 4K 164 ft	
	HDMI-CF328	HDMI Fiber Cable, 1080P & 4K 328 ft	
	HDMI-CF492	HDMI Fiber Cable, 1080P & 4K 492 ft	
	HDMI-CPL-S	HDMI Coupler, two female	
	HDMI-CVT-L	HDMI Converter, male to female, L SHAPE	
	HDMI-501S-2	HDMI Switcher, 5 Input / 1 Output	
	HDMI-SP2-2	4k HDMI 1 to 2 Splitter, 4K @ 30 Hz	
	HDMI-SP4-2	4k HDMI 1 to 4 Splitter, 4K @ 30 Hz	
	HDMI-SP8-3	4k HDMI 1 to 8 Splitter, 4K @ 30 Hz	
	HDMI-ED04-KVM	HDMI Extender, 164 ft (CAT6), 4K @ 30 Hz, USB Extender	

	HDMI-ED4K-KVM	4K HDMI KVM Extender, USB, HDMI, cat6, 390 ft
	HDMI-ED4K02	4K HDMI Extender, 328 ft (Cat6), 4K @ 30 Hz
	HDMI-EXT2022	HDMI Wireless Extender, 4K, 650 ft
	HDMI-KVM4K08	HDMI KVM 8 to 1, 4K
Cable Management & Wire Tie		
	Model	Description
	CW1510	Raceway cord cover, 5 ft, W 0.59 in, H 0.39 in, with adhesive backing rectangular
	CW1510-H	Raceway connector, W 0.59 in, H 0.39 in, rectangular
	CW1510-L	Raceway flat bend, W 0.59 in, H 0.39 in, rectangular
	CW1510-T	Raceway equal Tee, W 0.59 in, H 0.39 in, rectangular
	CW1510-B	Raceway internal bend, W 0.59 in, H 0.39 in, rectangular
	CW1510-C	Raceway external bend, W 0.59 in, H 0.39 in, rectangular
	CW1510-A	Raceway end cap, W 0.59 in, H 0.39 in, rectangular
	CW1510-KIT	Raceway Kit 1510, 3.5 ft cordcover×10, connector×10, other accessories×5×4
	CW2516	Raceway cord cover, 5 ft, W 0.98 in, H 0.63 in, with adhesive backing rectangular
	CW2516-H	Raceway connector, W 0.98 in, H 0.63 in, rectangular
	CW2516-L	Raceway flat bend, W 0.98 in, H 0.63 in, rectangular
	CW2516-T	Raceway equal Tee, W 0.98 in, H 0.63 in, rectangular
	CW2516-B	Raceway internal bend, W 0.98 in, H 0.63 in, rectangular
	CW2516-C	Raceway external bend, W 0.98 in, H 0.63 in, rectangular
	CW2516-A	Raceway end cap, W 0.98 in, H 0.63 in, rectangular
	CW2516-KIT	Raceway Kit 2516, 3.5 ft cordcover×10, connector×10, other accessories×5×4
	CW4016	Raceway cord cover, 5 ft, W 1.75 in, H 0.63 in, with adhesive backing rectangular
	CW4016-H	Raceway connector, W 1.75 in, H 0.63 in, rectangular
	CW4016-L	Raceway flat bend, W 1.75 in, H 0.63 in, rectangular
	CW4016-T	Raceway equal Tee, W 1.75 in, H 0.63 in, rectangular

	CW4016-B	Raceway internal bend, W 1.75 in, H 0.63 in, rectangular	
	CW4016-C	Raceway external bend, W 1.75 in, H 0.63 in, rectangular	
	CW4016-A	Raceway end cap, W 1.75 in, H 0.63 in, rectangular	
	CW4016-KIT	Raceway Kit 4016, 3.5 ft cordcover×10, connector×10, other accessories×5×4	
	CJ0201-L	J Hook 177.8 × 101.6 × 50.8 mm	
	CJ0201-M	J Hook 123 × 67 × 33 mm	
	CJ0201-S	J Hook 110.74 × 35.31 × 32 mm	
	CC8S-WH	Nail-in clips, 8 mm, 100 pcs	○
	CC16D-WH	Dual Nail-in clips, 16 mm, 50 pcs	○
	CC24D-WH	Dual Nail-in clips, 24 mm, 50 pcs	○
	CKKIT-WH	Nail-in clips Kit 50× CC8S-WH, 20× CC16D- WH, 20× CC24D-WH	○
	CT-6W-100	6" Cable Tie, 100 Pc/Bag (3.6 mm)	○
	CT-6B-100	6" Cable Tie, 100 Pc/Bag (3.6 mm)	●
	CT-8W-100	8" Cable Tie, 100 Pc/Bag (3.6 mm)	○
	CT-8B-100	8" Cable Tie, 100 Pc/Bag (3.6 mm)	●
	CT-12W-50	12" Cable Tie, 50 Pc/Bag (7.6 mm)	○
	CT-12B-50	12" Cable Tie, 50 Pc/Bag (7.6 mm)	●
	CT-6W-100H	6" Cable Tie, with screw hole, 100 Pc/Bag (3.5 mm)	○
	CT-6B-100H	6" Cable Tie, with screw hole, 100 Pc/Bag (3.5 mm)	●
	CT-8W-100H	8" Cable Tie, with screw hole, 100 Pc/Bag (4.5 mm)	○
	CT-8B-100H	8" Cable Tie, with screw hole, 100 Pc/Bag (4.5 mm)	●
	CT-12W-50H	8" Cable Tie, with screw hole, 100 Pc/Bag (4.5 mm)	○
	CT-12B-50H	12" Cable Tie, with screw hole, 50 Pc/Bag (7.6 mm)	●
Connector & DC Lead			
	Model	Description	
	CC5100	BNC Connector Twist	
	CC5200	BNC Female to Female Coupling	
	CC5300	T-Connector BNC	
	CC5400	RCA Female to BNC Male	
	CC5500	RCA Male to BNC Female	
	CC5600	BNC Male Crimp-On	
	CC5700	BNC Male to Female	
	CC5800	BNC Compression, 2 Pieces Set	
	CC5800-1	BNC Compression 1 piece Set	
	CC5800-S	BNC Compression Copper, 1 Piece Set	
	CC5900	RJ45 Connector 8 Pins Plug In for Cat5e Cable	
	CC5900-CAT5PT	Cat5e RJ45 Passthrough Connector	
	CC5900-CAT5KS	Cat5 Keystone Jack	
	CC5900-CAT6	RJ45 Connector for Cat6 Cable, 1 Piece Set	
	CC5900-CAT6PT	Cat6 RJ45 Passthrough Connector	
	CC5900-CAT6KS	Cat6 Keystone Jack	
	CC6000	B connector	
	CC6000-B	B connector-waterproof	
	CC6100-04	Power Cord Splitter, 2.1 mm Plug, 1 to 4	
	CC6100-08	Power Cord Splitter, 2.1 mm Plug, 1 to 8	
	CC6100-M	DC Power Cord Lead, 2.1 mm Plug, Male	
	CC6100-F	DC Power Cord Lead, 2.1 mm Plug, Female	
	CC6100-T-F	DC Lead with Terminal, 2.1 mm Plug, Female	
	CC6100-T-M	DC Lead with Terminal, 2.1 mm Plug, Male	
	CC7100	Mini Mic, Head, w/12V DC Plug	
	CC7200	AC (16-28 V) to DC (12 V) Converter, 1.5 A	

	CC7500	RCA to Stereo
	550602	RCA Keystone Red
Image Not Available	CP4825	48 V DC 2.5 A 4 pins adaptor
	ENS422A2	Two wire quick connector, AWG28-12
	ENS422A3	Three wire quick connector, AWG28-12
	ENS-2003-2P	Two wire quick connector, AWG28-12, with IP68 outdoor waterproof box
	ENS-2003-3P	Three wire quick connector, AWG28-12, with IP68 outdoor waterproof box

Video Balun		
Model	Description	
	HD-EV01P-03	1 CH HD Video Passive Balun Push Terminal, Pair Package
	HD-EV01P-VP-2	1 CH HD Video & Power Passive Balun, Pair (TX & RX)
	HD-EV01P-VPD	1 CH HD Video & Power & Data Passive Balun, Pair (TX & RX)
	HD-EV01P-VP-T	1 CH HD Video & Power Passive Balun, TX
	HD-EV01P-GLI	1 CH HD Coaxial Video Ground Loop Isolator
	HD-EV04P-VPS	4 CH HD Video Passive Balun Receiver 4 CH Power Supply (12 V DC)
	HD-EV16P-VPS	16 CH HD Video Passive Balun Receiver 16 CH Power Supply (12 V DC)

Testers		
Model	Description	
	MC150	Multi-Function CCTV Tester 12 V DC Output
	MC500-5-IP	5" IPS Touch Screen, 4K CVI/TVI/AHD, 12 V DC PoE, RJ45/UDP Cable Test, HDMI / VGA
	MC720-5-IP-P	7" Touch SCR.N. 5-in-1, 5MP/8K H265 IPC supported, COC, WIFI, POE, Meter, HDMI IN/ OUT, VGA in
	MC80	Multi-Function CCTV Tester

LED Monitor & TV Mount		
Model	Description	
	LED-10	10" LED Monitor, HDMI/VGA
	LED-22-H200	21.5" LED Monitor 1080P, VGA, HDMI, Speaker
	LED-24-H200	24" LED Monitor 1080P, VGA, HDMI, Speaker
	LED-32-LY	32" LED Monitor, 1080P

	LED-43-LK	43" LED Monitor, 4K
	LCD03-1026-B	10-26" TV Wall Bracket Pan 180°, Tilt 15°, VESA 75/100 mm
	LCD04-1026-B	10-26" TV Wall Bracket Pan 180°, Tilt 15°, VESA 75/100 mm
	LCD04-1437-B	14-37" TV Wall Bracket Pan 180°, Tilt 15°, VESA 75/100 mm
	LCD09-1437-B	14-37" TV Pendant Mount Bracket, 20.5"~33.5"
	LCD-EXT03-B	Pendant Mount Pole
	LCDNT-1027-B	10"-27" TV Wall Bracket, Non-tilt, VESA 75-100 / 75-510 mm
	LCDNT-3271-B	32"-71" TV Wall Bracket, Non-tilt, VESA 30-605 / 50-510 mm
	LCDP05-3665-B	36"-65" TV Wall Bracket, Tilt 15°
	LCDWP05-1455-B	14"-55" TV Wall Bracket
	LCDWP05-2137-B	21"-37" TV Wall Bracket Tilt 15°, Swivel 45°
	LCDWP05-3270-B	32"-70" TV Wall Bracket
	LCDWP05-32110-B	32"-100" TV Wall Bracket

Server Cabinet & Lock Box		
Model	Description	
	S-CABINET42U	Server Cabinet, 42U 23.5"(W) × 37.8"(D) × 80.7"(H), (5 Shelves Include)
	S-CABINET18U	Server Cabinet, 18U 23.6"(W) × 23.6"(D) × 39.4"(H), (1 Shelf Include)
	S-CABINET12U	Server Cabinet, 12U 23.6"(W) × 23.6"(D) × 25.6"(H)
	S-CABINET12U-WL	Server Cabinet, 12U 600 mm × 450 mm × 650 mm (Wall Mountable)
	S-CABINET12U-W	Open Frame Server Cabinet 12U; Wall mountable; 12U × 502 mm × 457 mm
	S-CABINET9U-W	Open Frame Server Cabinet 9U; Wall mountable; 9U × 502 mm × 457 mm
	S-CABINET6U-W	Open Frame Server Cabinet 6U; Wall mountable; 6U × 502 mm × 457 mm
	S-C-PANEL-2U18	Cabinet Plate 2U × 19 × 18"
	S-C-PANEL-2U15	Cabinet Plate 2U × 19 × 15"
	S-C-KBTRAY	Keyboard Tray for Server Cabinet
	S-C-SHELF450	Shelf for S-CABINET12U-WL (600 mm × 450 mm)

	S-C-SHELF600	Shelve for S-CABINET18U (600 mm x 600 mm)
	S-PDU8	1.5U Rack Mount Power Unit, with 8 Outlets
	S-C-CABLEBRK	Cable Management Bracket for Server Cabinet
	S-C-PATCH16-CAT6	CAT6 Patch Panel, 16 Ports
	S-C-PATCH24-CAT6	CAT6 Patch Panel, 24 Ports
	S-C-PATCH24-CAT6-FTP	CAT6 Patch Panel, 24 Ports, FTP
	S-C-PATCH48-CAT6-2U	CAT6 Patch Panel, 48 Ports, 2U
	S-C-PATCH24-UNSD	24-Port Blank Keystone, 1U Patch Panel
	S-C-PATCH24-SD	24-Port Blank Keystone, 1U Patch Panel with pre-numbered sequential ports.
	DVR-LOCKBOX01	18" x 24" x 5" Lock Box
	ST-LB01	18" x 18" x 5" Lock Box
	ST-LB03	21" x 21" x 8" Lock Box
	ST-LB04	24" x 24" x 8" Lock Box
	ST-LBWM03	Lockbox Wall Mount for SST-LB01/03
JONARD TOOLS		
	Model	Description
	WS-5	Adjustable wire stripper & cutter, 10-30 AWG (2.6-0.25 mm)
	TETP-901	Cable tester tone & probe kit+ w/ ABN, tests RJ45, BNC, and F COAX, 6P2C/4P2C jack
	CPF-215	Cable & Drop Ceiling Protector
	JIC-1022	Wire Stripper, ideal for cutting & stripping wires 10 - 22 AWG and 2 mm - 3 mm fiber jackets
	JIC-2030	Wire Stripper, ideal for cutting & stripping wires 20 - 30 AWG
	VT-1100	Non-contact dual range voltage detector pen, 24-1000 V AC & 90-1000 V AC w/ LED flashlight
	UC-864	Modular 6-in-1 crimping tool 28-22 AWG (0.32 - 0.64 mm), (RJ-22, RJ-11, RJ-12 & RJ-45)
	UC-4569	RJ11/12, RJ45 Pass-through modular crimping tool 6-in-1
	UC-8012	Crimper with COAX die, CATV F connectors RG-59/RG-6
	RDG-15A	15 ft Glow Kit+, 3/16" diameter, three standard 5" long glow rods can be assembled to 15"

	RDG-30A	30 ft Glow Kit+, 3/16" diameter, three standard 5" long glow rods can be assembled to 30"
	FTS-50	Steel Fish Tape
	CM-100	Cable Mapper Pro (designed for finding & identifying up to 8 COAX & network cables in main cable boxes)
	UST-100	COAX stripping tools, for RG-59/6/N48 & RG-7/11
	UST-500	COAX stripping tool & blade for RG-59/6/N48 & RG-7/11
	CF-200	WiSpy - Multipurpose wireless inspection camera & pulling tool
	CT-200	Universal Compression Tool for F connectors, BNC connectors, and RCA connectors
	CTF-180	360° Compression Tool for short and long RG-59 and RG-6 connectors
	TK-110INS	11 pieces insulated tool kit, 7 insulated screw drivers, wire stripper, and 3 pliers
Conduit (Available in CACI Branch Only)		
	Model	Description
	6001	1/2" one hole EMT strap steel
	6002	3/4" one hole EMT strap steel
	6011	1/2" two hole EMT strap steel
	6012	3/4" two hole EMT strap steel
	6071i	1/2" EMT connectors compression with insulated throat type steel
	6072i	3/4" EMT connectors compression with insulated throat type steel
	6081	1/2" EMT coupling compression type steel
	6082	3/4" EMT coupling compression type steel
	7301	1/2" weatherproof boxes double gang 4" round box aluminum
	7302	3/4" weatherproof boxes double gang 4" round box aluminum
	7511	4" round ceiling closure plate aluminum
	7471	Weatherproof single gang device mount cover blank
	7151X	1/2" weatherproof box outlets single gang 5 hole
	7152X	3/4" weatherproof box outlets single gang 5 hole
	8021	1/2" 90 degree EMT pull elbows zinc die cast

	8022	3/2" 90 degree EMT pull elbows zinc die cast
	9502(G)	1/2" aluminum flex conduit, 100 ft roll
	9001	1/2" EMT conduit steel 10 ft steel
	9002	3/4" EMT conduit steel 10 ft steel
	LB50-ECG	1/2" conduit bodies EMT & type with covers & gaskets aluminum
	LB75-ECG	3/4" conduit bodies EMT & type with covers & gaskets aluminum
	LR75-ERCG	3/4" conduit bodies for EMT & rigid threaded type with covers & gaskets aluminum
	8081	1/2" EMT pull elbow inside corner set screw type zinc die cast
	8082	3/4" EMT pull elbow inside corner set screw type zinc die cast
	8131	1/2" connectors set screw type zinc die cast
	8132	3/4" connectors set screw type zinc die cast
	8141	1/2" EMT coupling set screw type zinc die cast
	8142	3/4" EMT coupling set screw type zinc die cast
	8232I	1/2" flex connectors screw in type with insulated throat zinc die cast

Access Control & Intercom Accessory		
Model	Description	
	AC-280-2	280 kg Single Door Magnetic Lock
	ACB-280Z	280 kg Double Door Anti-Pool
	ACB-280L-2	280 kg Single Door Bracket
	AC-280D-2	280 kg Double Door Magnetic Lock
	AC-500-2	500 kg Single Door Magnetic Lock
	ACB-500Z-2	500 kg Single Door Bracket
	ACB-500L-2	500 kg Single Door Bracket
	AC-01L	Large Size Door Closer
	AC-02	IC Card
	AC-03	IC Button

	AC-04	Exit Button
	AC-05	Exit Button w/ IR Sensor
	AC-06	Mushroom Exit Button, NC/NO/COM, 115 x 70mm
	AC-BRACKET	Frosted Surface Junction Box for AC-06, 115 x 70 mm
	AC-138L-S	Fail secure long-type American standard electric strike W/signal output (NO/NC adjustable)
	AC-138-S	Fail secure American standard electric strike W/signal output (NO/NC adjustable)

Brackets		
Model	Description	
	BRACKET-1U-2	Rack Mount Ear for ED "1U-2" DVR/NVR, 1 Pair
	BRACKET08	Wall Mt. Bracket for "HDA-VPXXXXVF"
	UBB-W	Back box for universal wall mount UWB129-W and UWB155-W
	CM7016	4 Metal Mount
	CM7019	9 Metal Mount

SFP Transceiver		
Model	Description	
	NIM-CSGEM1-01NIR	SFP to RJ45 1000 Base-T, 1000 BASE-T, 328 ft Copper Transceiver
	NIM-CSTGD0-01DIR	RJ45 10 G BASE-T Copper SFP Transceiver
	NIM-PSTG10-31DIR NEW	10GBASE-LR SFP+ 1310 nm, 10km DDM Duplex L/C Single Mode Fiber Optical Transceiver Module
	NIM-PSTGM3-85DIR NEW	10GBASE-LR SFP+ 850 nm, 300 m DDM Duplex L/C Multimode Fiber Optical Transceiver Module
	NIM-SBGE20-35DIR NEW	1000BASE-LX SFP 1310 nm-TX, 1550 nm -RX 20 km DDM Simplex L/C Single Mode Fiber Transceiver Module
	NIM-SBGE20-53DIR NEW	1000BASE-LX SFP 1550 nm-TX, 1310 nm -RX 20 km DDM Simplex L/C Single Mode Fiber Transceiver Module
	NIM-SSGE10-31DIR NEW	1000BASE-SX SFP 1310 nm, 10 km DDM Duplex L/C Single Mode Fiber Transceiver Module
	NIM-SSGEM5-85DIR NEW	1000BASE-SX SFP 850 nm, 550 m DDM Duplex L/C Multimode Fiber Transceiver Module
	NIM-DSTG50-00NIR	10 G SFP DAC Cable, 10 G SFP to SFP Direct Attach Copper Patch Passive Cable, 1.6 ft

Visual Verification Bridge		
Model	Description	
	CKB-308	Visual Verification Bridge for Transmission of Video to Central Station - 8 Channel
	CKB-312V2	Visual Verification Bridge for Transmission of Video to Central Station - 12 Channel

Wall Plate		
Model	Description	
	TOL51/900672	Double Gang Decora Plate
	TOL20/550441	6-Ports Face Plate
	KS-PLATE1	Keystone Plate 1 Ports
	KS-PLATE2	Keystone Plate 2 Ports
	KS-PLATE4	Keystone Plate 4 Ports
Micro SD Card		
Model	Description	
	MA-SD-256G	MicroSDXC Card, up to 100 MB/S, 256 GB, A2, V30, Class 10
	MA-SD-128G	MicroSDXC Card, up to 100 MB/S, 128 GB, A2, V30, Class 10
	MA-SD-64G	MicroSDXC Card, up to 100 MB/S, 64 GB, A2, V30, Class 10
Miscellaneous		
Model	Description	
	GG-5IPPMVCV28	Network Camera, 5MP resolution, 1080P HDMI output
	WM-EBT17	Wireless Mouse, 2.4G, 1200 DPI
	CL0412AVF-2.6M	1/2" Auto Iris, 2.6 Megapixel, 4-12 mm, Vari-Focal Lens
	CC8100T/R-2	1 CH Passive USB Extender over Cat5e/6, Up to 656 ft
	CL0412AVF-2.6M	1/2" Auto Iris, 2.6 Megapixel, 4-12 mm, Vari-Focal Lens
	TOL36/HT-3640R	Punch Down Tool Professional with 2 Blades
	CT02	Terminal Block Punch Tool
	NKB1000-E	Network PTZ Controller, support HD-CVI & IP
	ED-YZJ1001	Desktop bracket for ED-E2128TM/TP
	CH9020	Aluminum housing
	EC1601BK	1 ft. power extension cord, black, UL
	ED-DVS1401E	1 ch encoder, 4MP AHD, 2MP TVI/AHD, VCA, with web server
	RUT956A00A00	Teltonika RUT956 LTE Cat 4 Router
	EV01AR	1 ch active video balun receiver

	YJ-T150	Forehead thermometer
	AC15UL	15 ft Power Extension Cord White / SPT-2 16/2 SF-21P+51
	CS32-50B	Cable sleeve, 1.5" (38mm), 50 ft, black
	CS34-50B	Cable sleeve, 3/4" (19mm), 50 ft, black
	KS05	Smart Lock, ANSI Grade 3 Touchpad Deadbolt Door Thickness: 35 - 50 mm
	AWP-500-W	22/4 alarm wire, CMP, UL, 500 ft
	CSIGN	Security Sign 10-5/8 inch plastic
Simply45		
Model	Description	
	S45-1000	Standard Cat5e UTP RJ45 Modular Plugs, Blue Tint, 100 pcs/Jar
	S45-1050	Standard Shielded (Internal ground) Cat5e STP RJ45 Modular Plugs, Blue Tint, 50 pcs Clamshell
	S45-1100	Standard Cat6/6a UTP RJ45 Modular Plugs with Bar45™ Hi/Lo Stagger, Green Tint, 100 pcs/Jar
	S45-1150	Standard Shielded (External Ground) Cat6 STP RJ45 Modular Plugs w/ Bar45™, Hi/Lo Stagger, 50 pcs/Jar
	S45-1500	Pass Through, Cat5e UTP, 100 pcs/Jar
	S45-1600	Pass Through, Cat6 UTP, 100 pcs/Jar
	S45-B001	Strain Reliefs for all S45 Brand CAT5E UTP & STP - 100 pcs/Bag
	S45-B002	Strain Reliefs for all S45 Brand Cat6/6a UTP, 100 pcs/Bag
	S45-C100	Pass Through RJ45 Crimper for all S45 brand UTP & STP RJ45 Modular Plugs, 1Ea/Blister
	S45-C101	PROSeries Heavy Duty RJ45 Crimp Tool for all S45 brand UTP & STP RJ45 Modular Plugs, 1Ea/Blister
	S45-C110	Installer Series Dual Cavity Crimp Tool for STP/UTP Standard & Pass-Through RJ45 & RJ11 Connectors, 1Ea/Blister
	S45-801	5" Premium Flush Cutter Tool up To 18 AWG, 1Ea/Blister
	S45-S01YL	Adjustable Cat7a/6a/6/5e UTP/STP Stripper, 1Ea/Blister
	S45-S02R	Installer Series No Nick Wire Stripper for Cat5e/6/6a & coaxial cables RG59/6/6Q, 1Ea/Blister
	S45-JH64-5	Standard J Hooks, Size 4" with Retainer Pin, 5 pcs/Inner Box
	S45-JHW12-10	Batwing J Hooks, Size 3/4", 10 pcs/Inner Box
	S45-JHW32-10	Batwing J Hooks, Size 2" with Retainer Pin, 10 pcs/Inner Box

SMART. SAFE. SECURE.

Built for the AI-surveillance world.



Seagate Skyhawk Surveillance HDD				
	Model	Description		
	C-HDD1000-VX	Seagate Surveillance 1TB AV 3.5"	CALL FOR PRICE	
	C-HDD2000-VX	Seagate Surveillance 2TB AV 3.5"	CALL FOR PRICE	
	C-HDD4000-VX	Seagate Surveillance 4TB AV 3.5"	CALL FOR PRICE	
	C-HDD6000-VX	Seagate Surveillance 6TB AV 3.5"	CALL FOR PRICE	

Seagate Skyhawk Surveillance HDD				
	Model	Description		
	C-HDD8000-VX	Seagate Surveillance 8TB AV 3.5"	CALL FOR PRICE	
	C-HDD10T-VE	Seagate Surveillance AI 10TB	CALL FOR PRICE	
	C-HDD12T-VE	Seagate Surveillance AI 12TB	CALL FOR PRICE	
	C-HDD16T-VE	Seagate Surveillance AI 16TB	CALL FOR PRICE	

Reliable Storage for Surveillance & CCTV

Unlock a new class of surveillance storage designed for AI, video analytics, and video management solutions.





Every Frame Matters.

Protect what matters most from small businesses to large corporate campuses and smart cities, to securing your business with WD Purple surveillance hard drives. Designed specifically for high temperature, always-on surveillance systems, WD Purple delivers reliable, high-quality video playback when you need it most because when every second counts, we save them all.

Western Digital Surveillance HDD			
	Model	Description	
	C-HDD1000-PUR	WD Purple Surveillance 1TB AV 3.5"	CALL FOR PRICE
	C-HDD2000-PUR	WD Purple Surveillance 2TB AV 3.5"	CALL FOR PRICE
	C-HDD3000-PUR	WD Purple Surveillance 3TB AV 3.5"	CALL FOR PRICE
	C-HDD4000-PUR	WD Purple Surveillance 4TB AV 3.5"	CALL FOR PRICE
	C-HDD6200-PUR	WD Purple Surveillance 6TB AV 3.5"	CALL FOR PRICE

Western Digital Surveillance HDD			
	Model	Description	
	C-HDD8000-PUR	WD Purple Surveillance 8TB AV 3.5"	CALL FOR PRICE
	C-HDD10T-PUR	WD Purple Surveillance 10TB AV	CALL FOR PRICE
	C-HDD12T-PUR	WD Purple Surveillance 12TB AV	CALL FOR PRICE
	C-HDD14T-PUR	WD Purple Surveillance 14TB AV	CALL FOR PRICE
	C-HDD18T-PUR	WD Purple Surveillance 18TB AV	CALL FOR PRICE

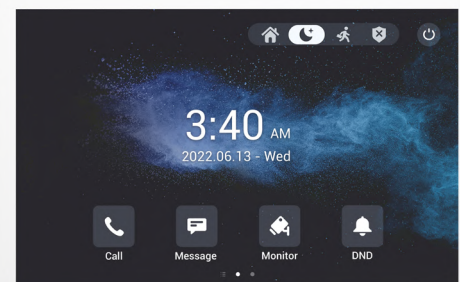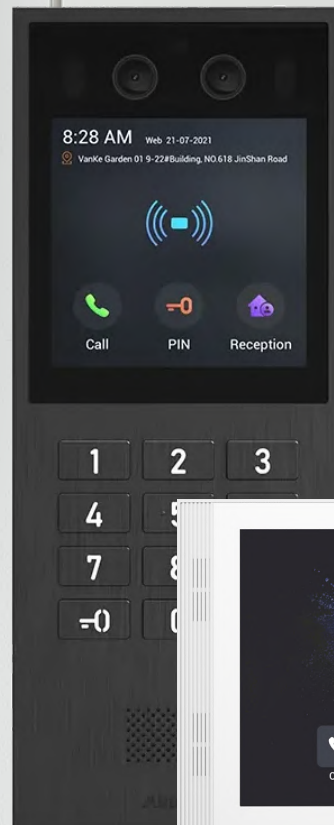

OPEN A SMART WORLD

A stylish design with cutting edge technology that is more robust than most multi-tenant intercoms on the market today. We have, and continue to work hand-in-hand with Akuvox's development team to bring the best smart intercom experience on the market, for intelligent building communication video & access.

PRO Edition
PRODUCT CATALOG
2026



Contact Info: +1(954)553-9133 / +1(646)784-9154
info@rentsurveillancetrailer.com